

NPN PRE-BIASED SMALL SIGNAL SOT-26 DUAL SURFACE MOUNT TRANSISTOR


Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDA)
- Built-In Biasing Resistors
- Also Available in Lead Free Version


Mechanical Data

- Case: SOT-26, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Weight: 0.015 grams (approx.)
- Ordering Information (See Page 3)

P/N	R1	R2	MARKING
DDC124EK	22K Ω	22K Ω	N17
DDC144EK	47K Ω	47K Ω	N20
DDC114YK	10K Ω	47K Ω	N14
DDC123JK	2.2K Ω	47K Ω	N06
DDC114EK	10K Ω	10K Ω	N13
DDC143TK	4.7K Ω	-	N07
DDC114TK	10K Ω	-	N12

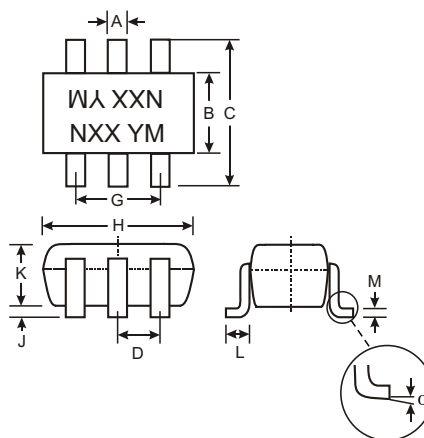

SOT-26			
Dim	Min	Max	Typ
A	0.35	0.50	0.38
B	1.50	1.70	1.60
C	2.70	3.00	2.80
D	0.95		
G	1.90		
H	2.90	3.10	3.00
J	0.013	0.10	0.05
K	1.00	1.30	1.10
L	0.35	0.55	0.40
M	0.10	0.20	0.15
α	0°	8°	—
All Dimensions in mm			

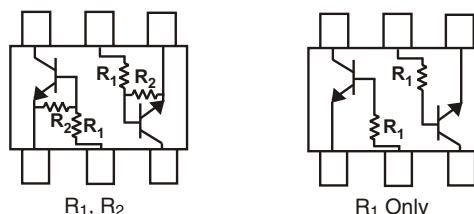

SCHEMATIC DIAGRAM

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (3) to (1)	V _{CC}	50	V
Input Voltage, (2) to (1)	V _{IN}	-10 to +40 -10 to +40 -6 to +40 -5 to +12 -10 to +40 -5 V _{max} -5 V _{max}	V
Output Current	I _O	30 30 70 100 50 100 100	mA
Output Current All	I _C (Max)	100	mA
Power Dissipation (Total)	P _d	300	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	416.7	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

- Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. 200mW per element must not be exceeded.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDC143TK & DDC114TK only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	50	—	—	V	I _C = 50μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	50	—	—	V	I _C = 1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	5	—	—	V	I _E = 50μA
Collector Cutoff Current	I _{CBO}	—	—	0.5	μA	V _{CB} = 50V
Emitter Cutoff Current	I _{EBO}	—	—	0.5	μA	V _{EB} = 4V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	0.3	V	I _C /I _B = 2.5mA / 0.25mA DDC143TK I _C /I _B = 1mA / 0.1mA DDC114TK
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = 1mA, V _{CE} = 5V
Input Resistor (R ₁) Tolerance	ΔR ₁	-30	—	+30	%	—
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = -5mA, f = 100MHz


Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDC124EK DDC144EK DDC114YK DDC123JK DDC114EK	V _{I(off)}	0.5 0.5 0.3 0.5 0.5	1.1 1.1 — — 1.1	—	V	V _{CC} = 5V, I _O = 100μA
	DDC124EK DDC144EK DDC114YK DDC123JK DDC114EK	V _{I(on)}	—	1.9 1.9 — — 1.9	3.0 3.0 1.4 1.1 3.0		V _O = 0.3, I _O = 5mA V _O = 0.3, I _O = 2mA V _O = 0.3, I _O = 1mA V _O = 0.3, I _O = 5mA V _O = 0.3, I _O = 10mA
Output Voltage	DDC124EK DDC144EK DDC114YK DDC123JK DDC114EK	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 10mA / 0.5mA
Input Current	DDC124EK DDC144EK DDC114YK DDC123JK DDC114EK	I _I	—	—	0.36 0.18 0.88 3.6 0.88	mA	V _I = 5V
Output Current		I _{O(off)}	—	—	0.5	μA	V _{CC} = 50V, V _I = 0V
DC Current Gain	DDC124EK DDC144EK DDC114YK DDC123JK DDC114EK	G _I	56 68 68 80 30	—	—	—	V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA
Input Resistor (R ₁) Tolerance		ΔR ₁	-30	—	+30	%	—
Resistance Ratio Tolerance		R ₂ /R ₁	-20	—	+20	%	—
Gain-Bandwidth Product*		f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz

* Transistor - For Reference Only

Ordering Information (Note 3)

Device	Packaging	Shipping
DDC124EK-7	SOT-26	3000/Tape & Reel
DDC144EK-7	SOT-26	3000/Tape & Reel
DDC114YK-7	SOT-26	3000/Tape & Reel
DDC123JK-7	SOT-26	3000/Tape & Reel
DDC114EK-7	SOT-26	3000/Tape & Reel
DDC143TK-7	SOT-26	3000/Tape & Reel
DDC114TK-7	SOT-26	3000/Tape & Reel

- Notes:
- For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 - For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.
Example: DDC114TK-7-F.

Marking Information


NXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDC123JK

ONE SECTION

NEW PRODUCT

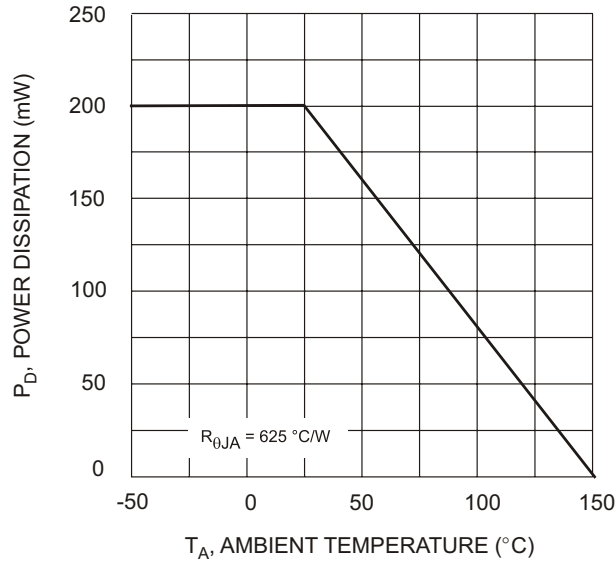


Fig. 1 Derating Curve

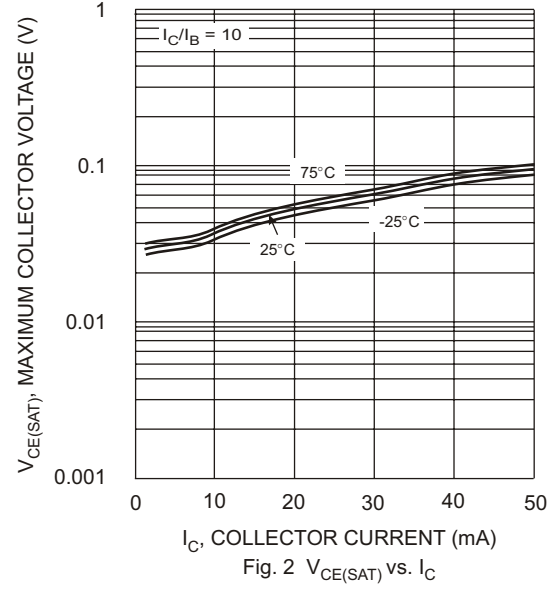


Fig. 2 $V_{CE(SAT)}$ vs. I_C

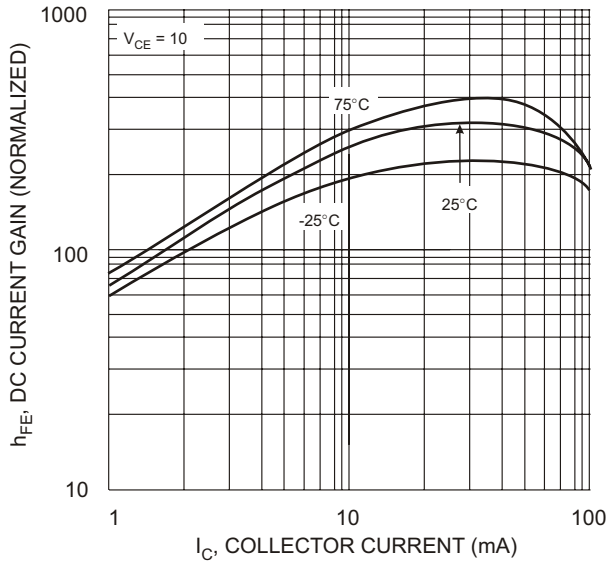


Fig. 3 DC Current Gain

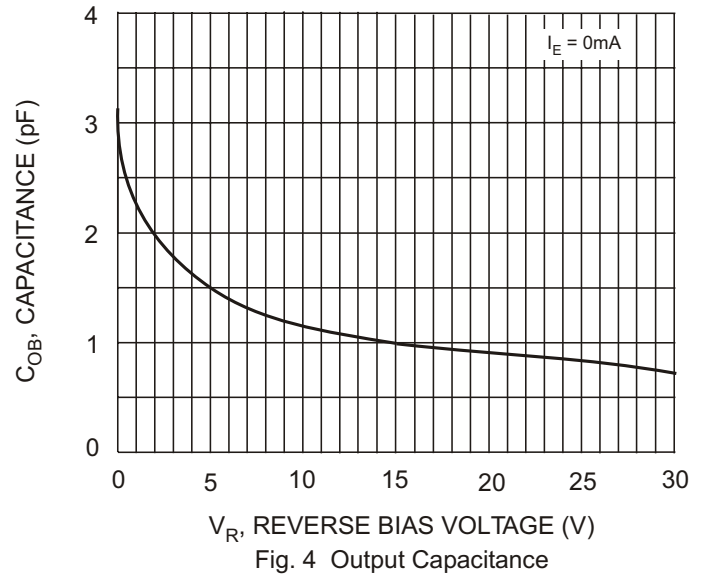


Fig. 4 Output Capacitance

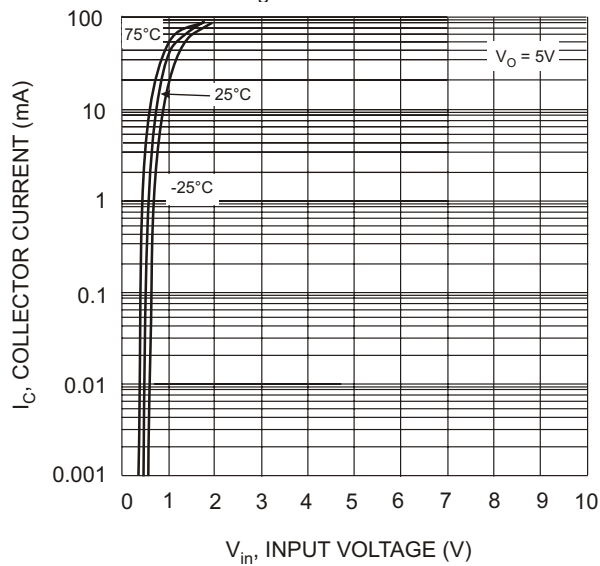


Fig. 5 Collector Current Vs. Input Voltage

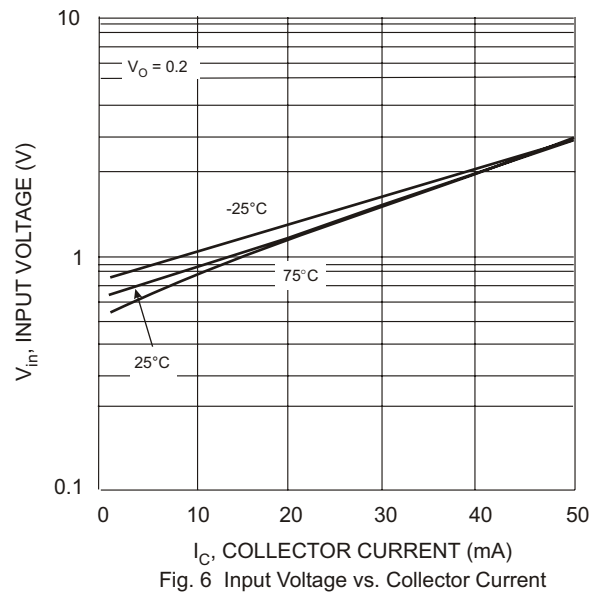


Fig. 6 Input Voltage vs. Collector Current

TYPICAL CURVES - DDC114TK

ONE SECTION

NEW PRODUCT

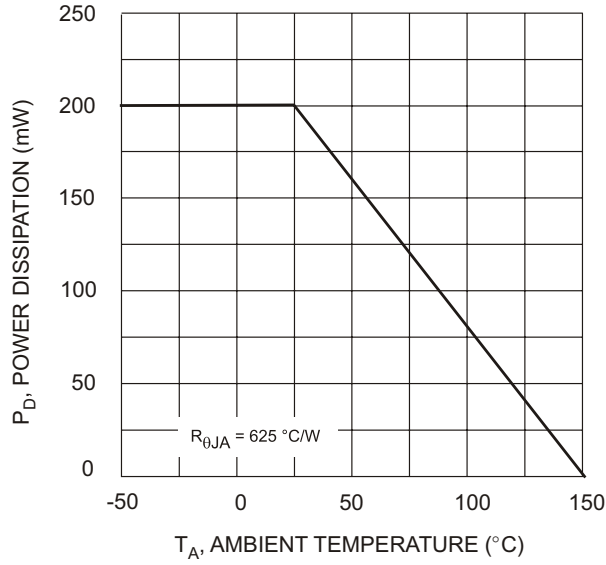


Fig. 1 Derating Curve

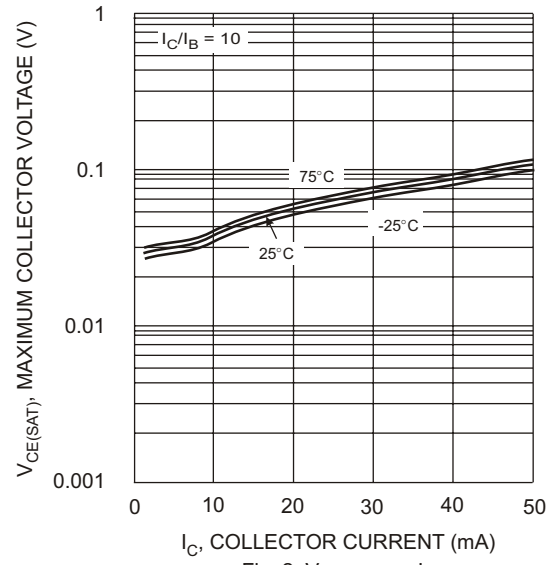


Fig. 2 $V_{CE(SAT)}$ vs. I_C

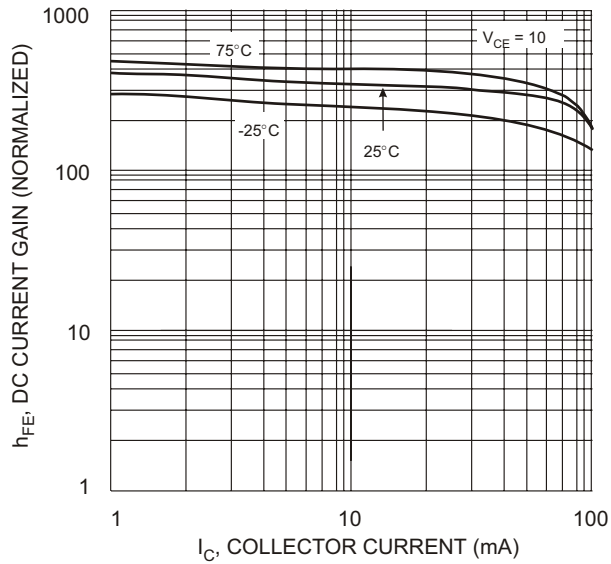


Fig. 3 DC Current Gain

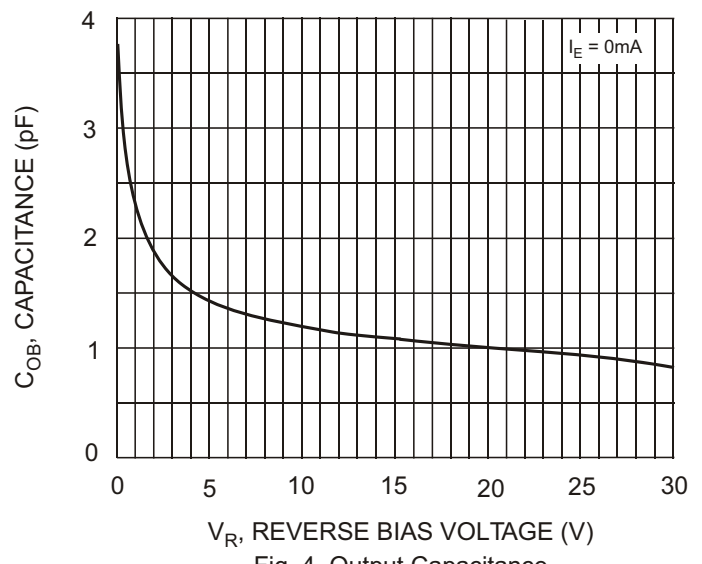


Fig. 4 Output Capacitance

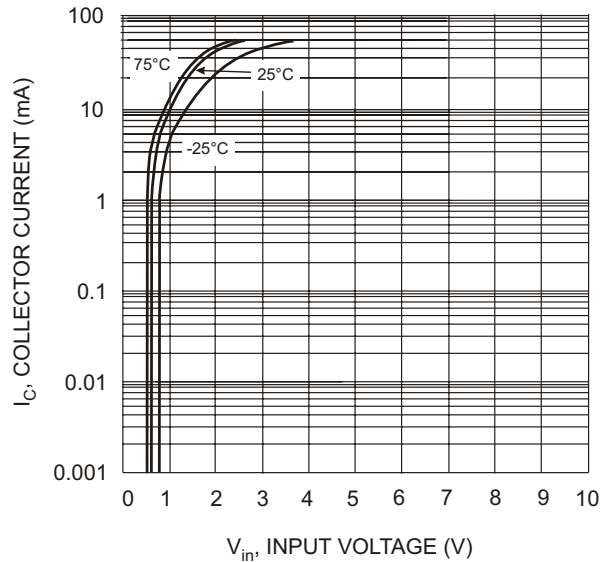


Fig. 5 Collector Current Vs. Input Voltage

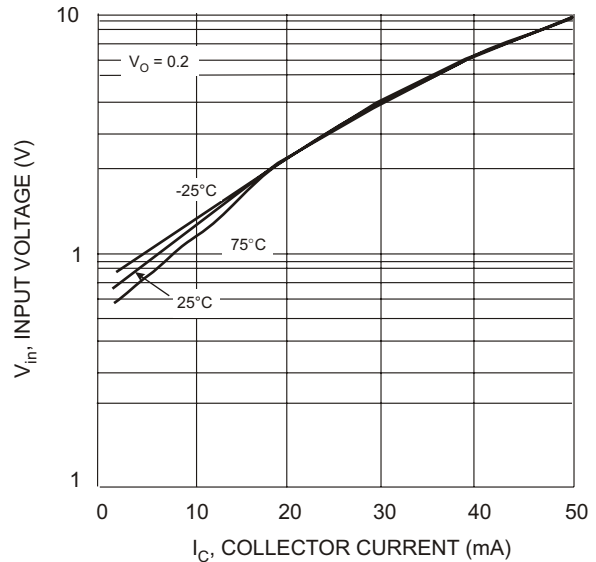


Fig. 6 Input Voltage vs. Collector Current