
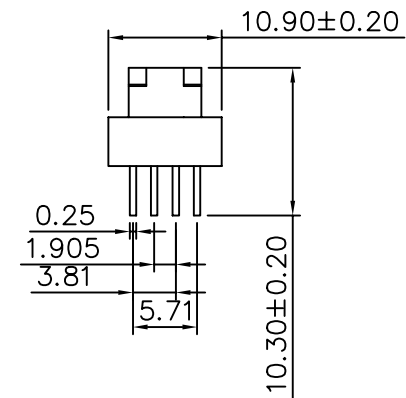


SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/Min.
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing :Plastic Thermoplastic
 P.B.T UL 94V-0,Black
 Contact: Phosphor Bronze Gold Selective Plated Over Tin
 Front Shell : Steel,Nickel Plated Over Copper
 Latch: Steel,Nickel Plated Over Copper

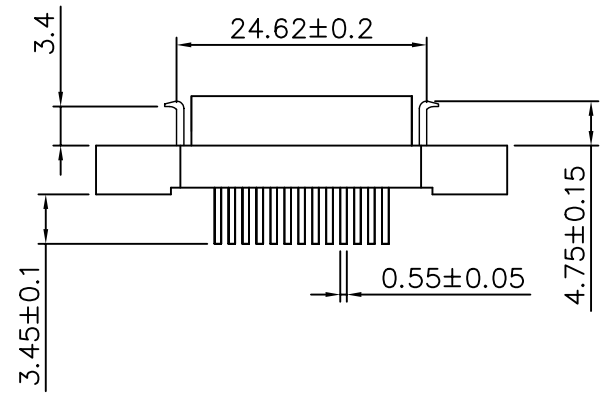

DRAWING No.
 HPC026SD

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE REV. A UNIT mm

AREA	REVISIONS	CHK	DATE