
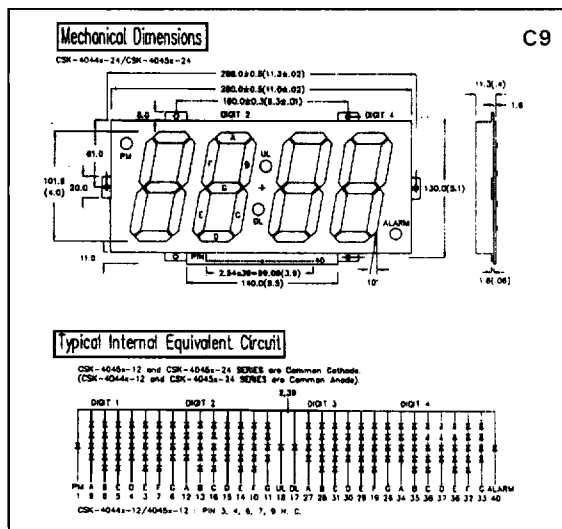
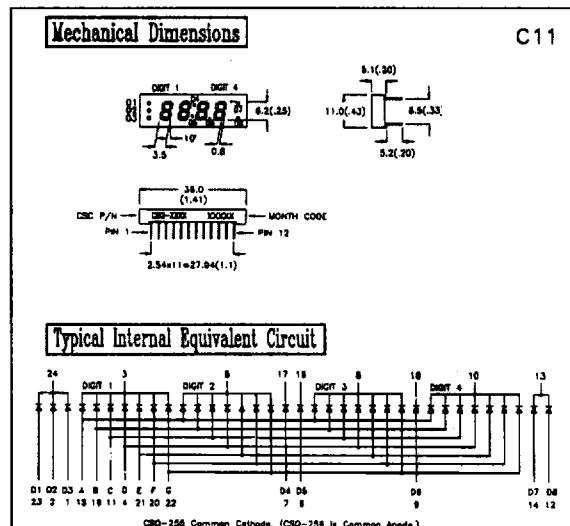
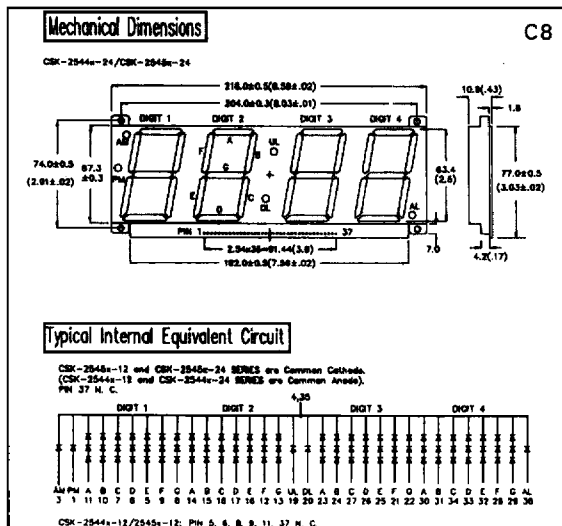
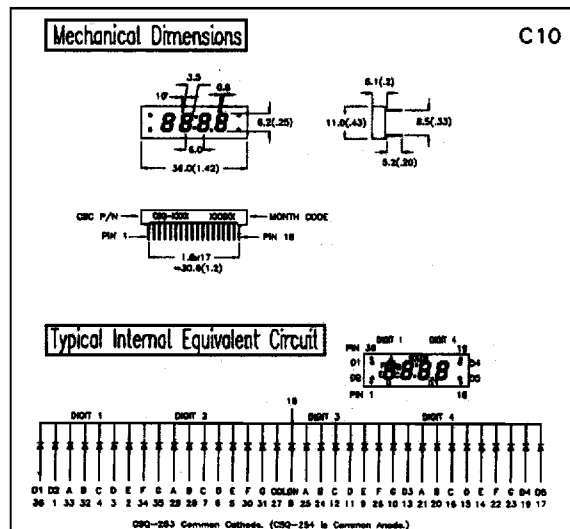


Device Package Outline	Digit Height mm (inch)	Drive Mode	Polarity	Bright Red (H)	Super- Bright Red(D)	Orange (E)	Green (G)	Device Package Drawing
				$\lambda_p = 695 \text{ nm}$	$\lambda_p = 660 \text{ nm}$	$\lambda_p = 635 \text{ nm}$	$\lambda_p = 570 \text{ nm}$	
	46.8 (1.84)	Direct	A	CSK 1844H-12	CSK 1844D-12	CSK 1844E-12	CSK 1844G-12	C7
			C	CSK 1845H-12	CSK 1845D-12	CSK 1845E-12	CSK 1845G-12	
			A	CSK 1844H-24	CSK 1844D-24	CSK 1844E-24	CSK 1844G-24	
			C	CSK 1845H-24	CSK 1845D-24	CSK 1845E-24	CSK 1845G-24	
	63.4 (2.5)	Direct	A	-	CSK-2544D-12	CSK-2544E-12	CSK-2544G-12	C8
			C	-	CSK-2545D-12	CSK-2545E-12	CSK-2545G-12	
			A	-	CSK-2544D-24	CSK-2544E-24	CSK-2544G-24	
			C	-	CSK-2545D-24	CSK-2545E-24	CSK-2545G-24	
	101.6 (4.0)	Direct	A		CSK 4044D-12	CSK 4044E-12	CSK 4044G-12	C9
			C		CSK 4045D-12	CSK 4045E-12	CSK 4045G-12	
			A		CSK 4044D-24	CSK 4044E-24	CSK 4044G-24	
			C		CSK 4045D-24	CSK 4045E-24	CSK 4045G-24	
	6.2 (0.24)	Direct	C	CSQ-253H-21	CSQ-253D-11	CSQ-253E-11	CSQ-253G-11	C10
			A	CSQ-254H-21	CSQ-254D-11	CSQ-254E-11	CSQ-254G-11	
	6.2 (0.24)	Multiplex	C	CSQ 255H-21	CSQ-255D-11	CSQ 255E-11	CSQ 255G-11	C11
			A	CSQ 256H-21	CSQ-256D-11	CSQ-256E-11	CSQ 256G-11	

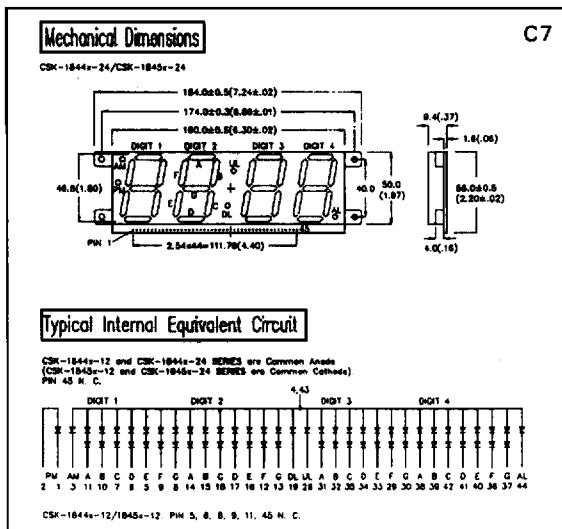

NOTE:1.All dimensions are in millimeters(inches).
2.Tolerance is $\pm 0.25\text{mm}(0.010")$ unless otherwise noted.