78245

Back to search results

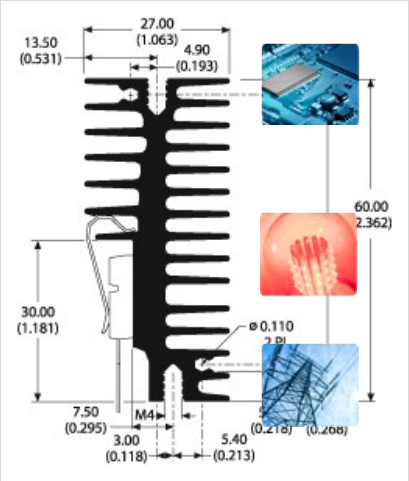

Height: 2.36 in (59.94 mm)
Width: 1.06 in (26.92 mm)
Perimeter: 23.50 in
Weight: 1 lb per foot (1.49 kg per meter)
Material: 6063-T5 Aluminum Extrusion Alloy
RoHS: Compliant. Cut extrusion parts with a G in the part number are compliant.

Thermal Data based on 3 in. length 3 inches in mm Update

Natural Convection: 2.98 based on 70 C temp rise above ambient

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

Natural Convection

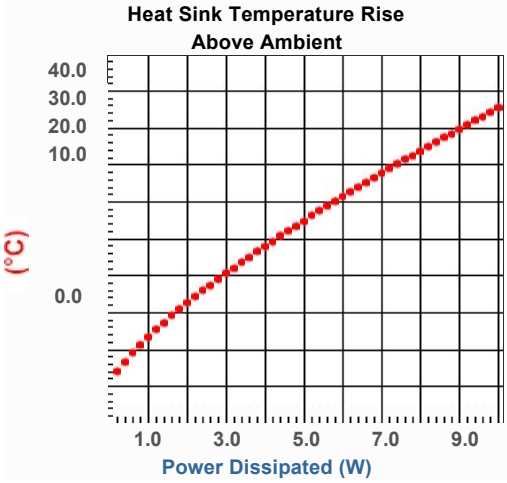

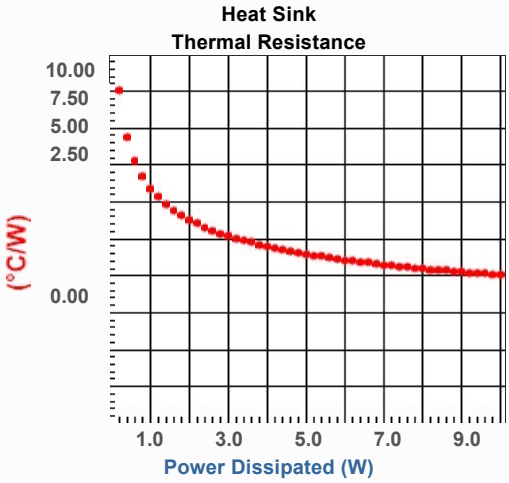

Forced Convection

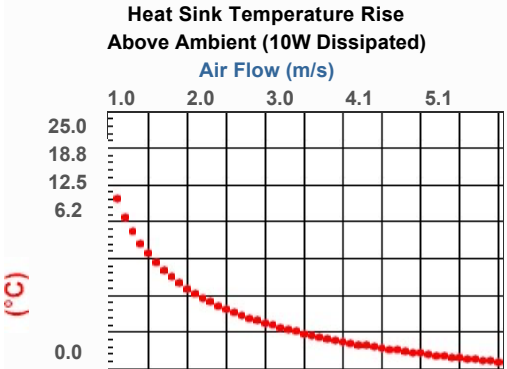

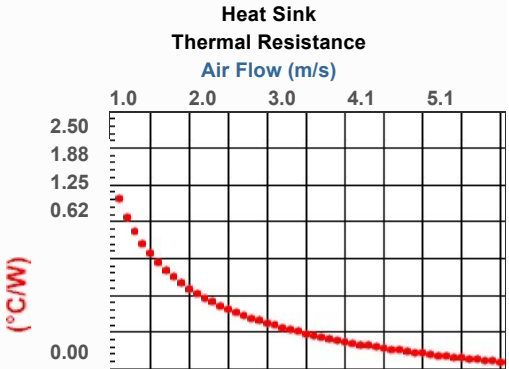

Lead Time (for in stock inventory)
Rav n 3-5 business days
Cut n 2-3 weeks

CUSTOM CUT EXTRUSION

SELECT CUT
LI
FI

IN MM
Black Anodized

SELECT QUANTITY PIECES

PA ER: 78245

PR ECE:

BUILD PART

RAW BAR EXTRUSION

FULL BAR LENGTH 8.20FT (2.5M)
UNFINISHED

SELECT QUANTITY FEET

PART NUMBER: 782451F00000

PRICE PER FOOT:

BUILD PART

HALF BAR LENGTH 4.1FT (1.25M)
UNFINISHED

SELECT QUANTITY FEET

PART NUMBER: 782452F00000

PRICE PER FOOT:

BUILD PART

CUSTOMIZE

AAVID OFFERS MANY DIFFERENT OPTIONS FOR YOUR EXTRUSION INCLUDING PUNCHING, DRILLING (CNC), FLY CUTTING, CAUSTIC ETCHING AND MORE. REQUEST QUOTE

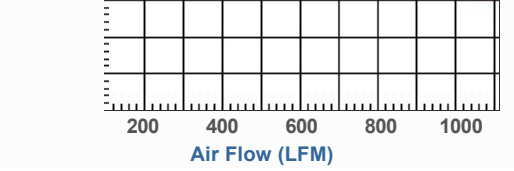

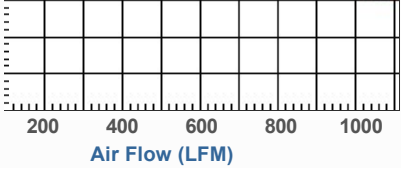

© Copyright 2016 Aavid Thermalloy, LLC.

USA: 1.855.32.AAVID **Europe:** 39.051.764002 **Asia:** 86.21.6115.2000 x 8122