
Features

- 2nd Generation EE Complex Programmable Logic Devices
 - 3.0V to 3.6V Operating Range with 5V Tolerant I/Os
 - 32 - 512 Macrocells with Enhanced Features
 - Pin-compatible with Industry-standard Devices
 - Speeds to 4.5 ns Maximum Pin-to-pin Delay
 - Registered Operation to 225 MHz
- Enhanced Macrocells with Logic Doubling™ Features
 - Bury Either Register or COM while Using the Other for Output
 - Dual Independent Feedback Allows Multiple Latch Functions per Macrocell
 - 5 Product Terms per Macrocell, Expandable to 40 per Macrocell with Cascade Logic, Plus 15 More with Foldback Logic
 - D/T/Latch Configurable Flip-flops plus Transparent Latches
 - Global and/or per Macrocell Register Control Signals
 - Global and/or per Macrocell Output Enable
 - Programmable Output Slew Rate per Macrocell
 - Programmable Output Open Collector Option per Macrocell
 - Fast Registered Input from Product Term
- Enhanced Connectivity
 - Single Level Switch Matrix for Maximum Routing Options
 - Up to 40 Inputs per Logic Block
- Advanced Power Management Features
 - ITD (Input Transition Detection) Available Individually on Global Clocks, Inputs and I/O for μ A Level Standby Current on “L” versions
 - Pin-controlled 1 mA Standby Mode
 - Reduced-power Option per Macrocell
 - Automatic Power Down of Unused Macrocells
 - Programmable Pin-keeper Inputs and I/Os
- Available in Commercial and Industrial Temperature Ranges
- Available in All Popular Packages Including PLCC, PQFP, TQFP and BGA
- EE Technology
 - 100% Tested
 - Completely Reprogrammable
 - 10,000 Program/Erase Cycles
 - 10 Year Data Retention
 - 2000V ESD Protection
 - 200 mA Latch-up Immunity
- JTAG Boundary-scan Testing Port per IEEE 1149.1-1990 and 1149.1a-1993
 - Pull-up Option on JTAG Pins TMS and TDI
- IEEE 1532 Compatibility for Fast In-System Programmability (ISP) via JTAG
- PCI-compliant
- Security Fuse Feature



ATF15xxAE Family Datasheet

ATF1502AE(L)
ATF1504AE(L)
ATF1508AE(L)
ATF1516AE(L)
ATF1532AE(L)

Preliminary

Rev. 2398H-PLD-8/03





General Description

Beginning with the introduction of the 100% connected ATF1500 with 32 enhanced macrocells in 1996, Atmel's CPLD products have delivered extra IO connectivity and logic reusability. Atmel's commitment to efficient, flexible architecture has continued with the current Atmel ATF15xx Family of industry-standard, pin-compatible CPLDs. Atmel's Logic Doubling architecture consists of wider fan-in, additional routing and clock options, combined with sophisticated, proprietary device fitters, extend CPLD place and route efficiency. Atmel enhanced macrocell includes double independent buried feedback that allows designers to pack more logic (particularly shifters and latches) into a smaller CPLD or leave spare room for later revisions. The Atmel ATF15xx family delivers enhanced functionality and flexibility with no additional design effort and is highly cost effective.

The Atmel ATF15xx Family includes all popular configurations and speeds.

Table 1. ATF15xxAE Family Device Features

| Feature | ATF1502AE(L) | ATF1504AE(L) | ATF1508AE(L) | ATF1516AE(L) | ATF1532AE(L) |
|-----------------------------|--------------|--------------|--------------|--------------|--------------|
| Usable Gates | 750 | 1500 | 3000 | 6000 | 12000 |
| Macrocells | 32 | 64 | 128 | 256 | 512 |
| Logic Blocks | 2 | 4 | 8 | 16 | 32 |
| Max. # Pins | 44 | 100 | 256 | 256 | 256 |
| Max. User I/Os | 36 | 68 | 100 | 164 | 212 |
| T _{PD} Grades (ns) | 4, 7, 10(15) | 4, 7, 10(15) | 5, 7, 10(15) | 5, 7, 10(15) | 5, 7, 12(15) |

The Atmel ATF15xxAE Family includes pin-compatible products in all popular packages.

Table 2. ATF15xxAE Family Device Packages and Number of Signal Pins⁽¹⁾⁽²⁾

| Packages | ATF1502AE(L) | ATF1504AE(L) | ATF1508AE(L) | ATF1516AE(L) | ATF1532AE(L) |
|--------------|--------------|--------------|--------------|--------------|--------------|
| 44-pin PLCC | 36 | 36 | | | |
| 44-pin TQFP | 36 | 36 | | | |
| 49-ball BGA | | 41 | | | |
| 84-pin PLCC | | | 68 | | |
| 100-pin TQFP | | 68 | 84 | 84 | |
| 100-ball BGA | | 68 | 84 | 84 | |
| 144-pin LQFP | | | 100 | 120 | 120 |
| 169-ball BGA | | | 100 | | |
| 208-pin PQFP | | | | 164 | 176 |
| 256-ball BGA | | | 100 | 164 | 212 |

- Notes: 1. Contact Atmel for up-to-date information on device and package availability.
 2. When the JTAG port is used for In System Programming (ISP) or Boundary-scan Testing (BST), the four associated pins become JTAG pins and are unavailable for user I/O.

Functional Description

The ATF15xxAE Family of 3.3 Volt supply, high-performance, high-density complex programmable logic devices (CPLDs) utilizes Atmel's proven electrically-erasable technology. With up to 512 macrocells, they easily integrate logic from several TTL, SSI, MSI, LSI and classic PLDs. The ATF15xxAE Family's enhanced macrocell architecture, switch matrices and routing increase usable gate count for new designs and increase odds of successful pin-locked design modifications while maintaining pin-compatibility with industry-standard CPLDs.

The ATF15xxAE Family devices have four dedicated input pins and depending on the type of device and package, up to 208 bi-directional I/O pins. Each dedicated input pin can also serve as a global control signal, register clock, register reset or output enable. Each of these control signals can be selected for use individually within each macrocell. Each input and I/O pin also feeds into the global bus.

The macrocells are organized into groups of sixteen called logic blocks. The switch matrix in each logic block selects 40 individual signals from the global bus. Macrocells within a given logic block may share their sixteen foldback signals on a regional foldback bus. Cascade logic between macrocells in the Logic Block allows fast, efficient generation of complex logic functions. All macrocells are capable of being I/Os; however, the actual number of I/O pins depends on the device and package type. The ATF15xxAE Family members contain two, four, eight, sixteen or thirty-two such logic blocks, each capable of creating sum term logic with a fan-in of 40 inputs from the switch matrix having access to up to 80 product terms.

Unused macrocells are automatically disabled by the fitter software to decrease power consumption. A security fuse, when programmed, protects the contents of the other fuses. Two bytes (16 bits) of User Signature are accessible to the user for purposes such as storing project name, part number, revision or date. The User Signature is accessible regardless of the state of the security fuse.

The ATF15xxAE Family devices are In-System Programmable (ISP) devices. They use the industry-standard 4-pin JTAG interface (IEEE Std. 1149.1), and are fully-compliant with JTAG's Boundary-scan Description Language (BSDL). ISP allows the device to be programmed without removing it from the printed circuit board. In addition to simplifying the manufacturing flow, ISP also allows design modifications to be made in the field via software.

Global Bus/Switch Matrix

The global bus (Figure 1) contains all input and I/O pin signals as well as the buried feedback signals from all macrocells. The switch matrix in each logic block receives as its inputs all signals from the global bus. Up to 40 of these signals can be selected as inputs to the individual logic blocks by the fitter software. Atmel's ATF15xx Family of CPLDs use a single level switch matrix signal distribution structure, where each logic block input has access to the same number of global bus inputs, maximizing the number of possible ways to route a global bus signal. This single level structure is in contrast with split switch matrix structures used by others in which routing a particular global bus input to a particular logic block input makes that signal unavailable to some other logic blocks, thus greatly limiting the available opportunities to route.

The ATF15xxAE Family macrocell, shown in Figure 2, consists of five sections: product terms and product term select multiplexer, OR/XOR/CASCADE logic, foldback bus, a flip-flop and output buffer. Extra fan-in and signal routing are provided throughout. Each macrocell can generate a foldback logic term from the product term mux and a buried feedback with extra routing that go to the global bus.

Figure 1. ATF15xxAE Family Typical Block Diagram


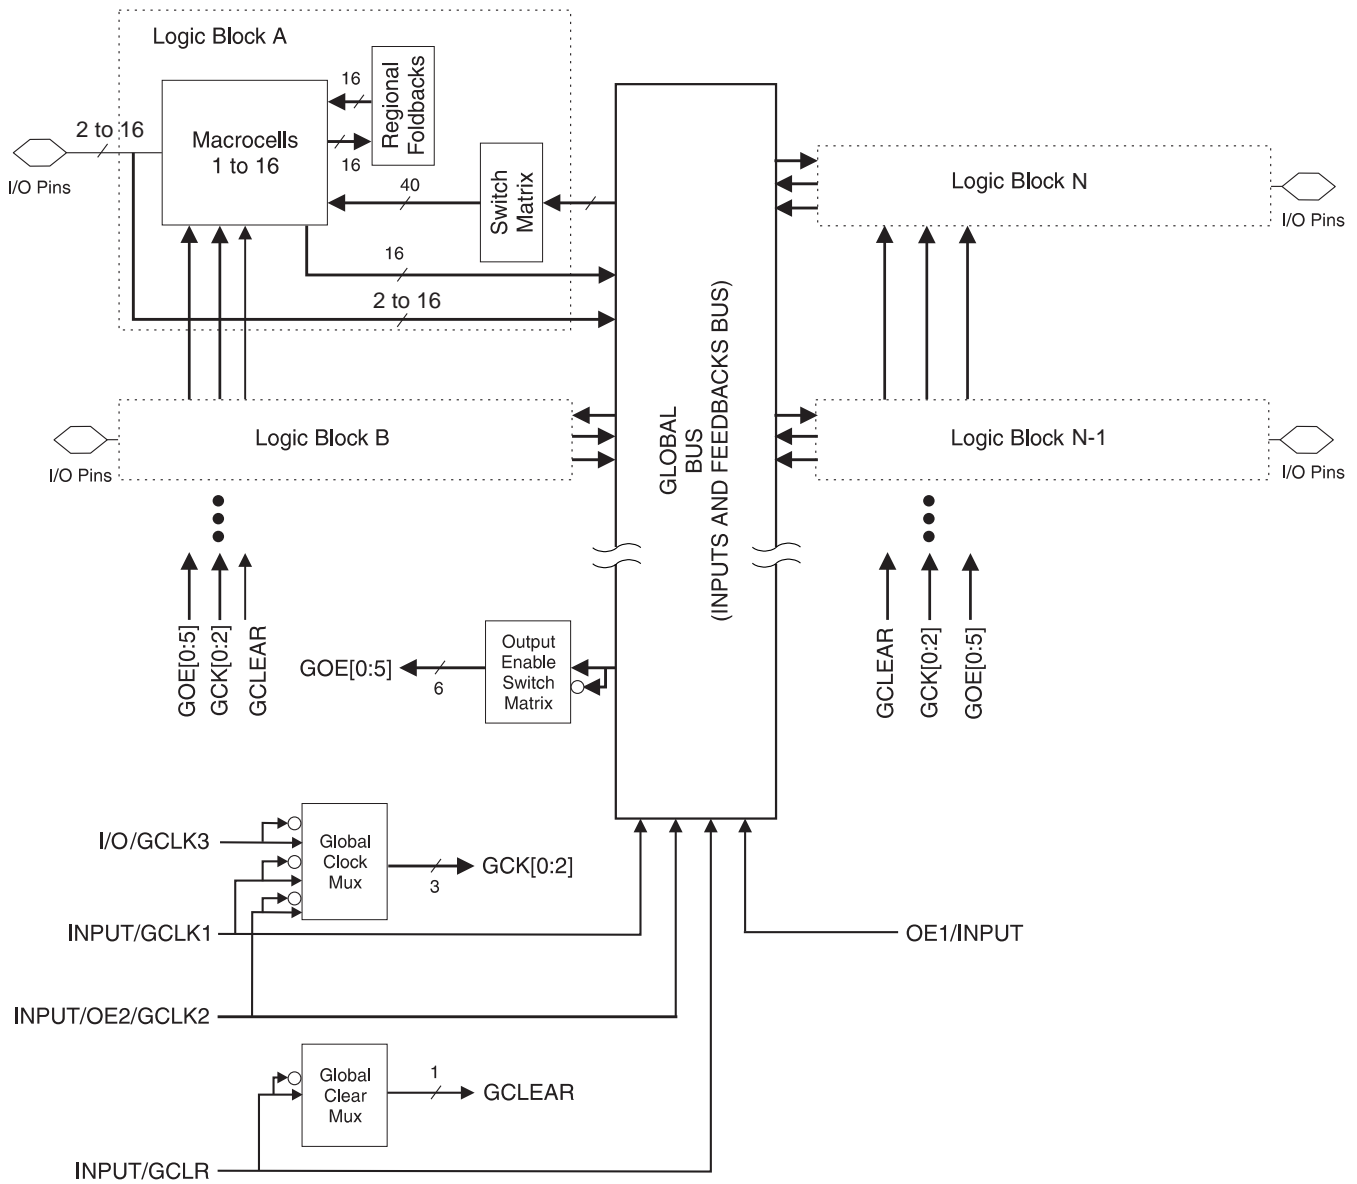


Figure 2. ATF15xxAE Family Macrocell with Enhanced Features In Red

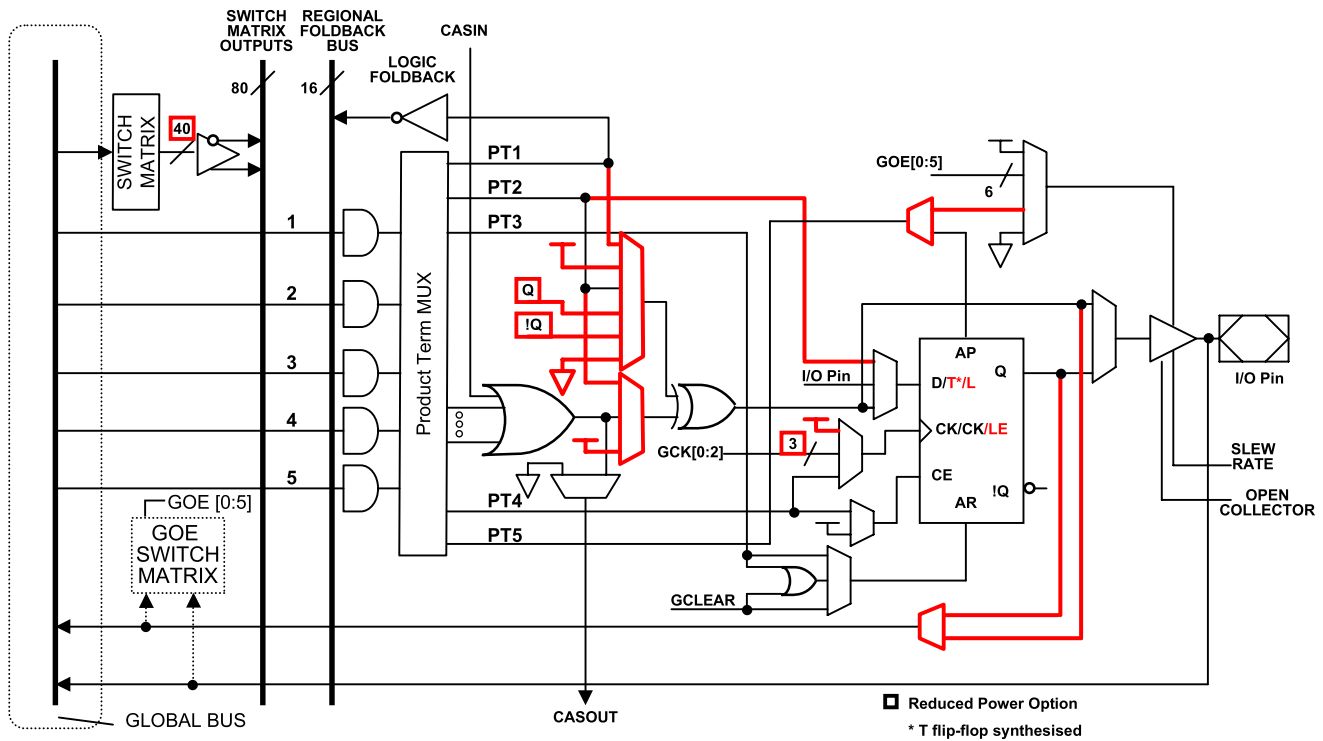

Product Terms and Select Mux

Within each macrocell are five product terms. Each product term may receive as its inputs any combination of the signals from the switch matrix or regional foldback bus. The product term select multiplexer (PTMUX) allocates the five product terms as needed to the macrocell logic gates and control signals. The PTMUX programming is determined by the fitter software, which selects the optimum macrocell configuration.

OR/XOR/ CASCADE Logic

Within a single macrocell, all the product terms can be routed to the OR gate, creating a 5-input AND/OR sum term. With the addition of the CASIN from neighboring macrocells, this can be expanded to as many as 40 product terms with little additional delay.

The macrocell's XOR gate allows efficient implementation of compare and arithmetic functions. One input to the XOR comes from the OR sum term. The other XOR input can be a product term or a fixed high- or low-level. For combinatorial outputs, the fixed level input allows polarity selection. For registered functions, the fixed levels allow DeMorgan minimization of product terms. The XOR gate may be fed from the flip-flop output to emulate T- and JK-type flip-flops, or fed to the buried feedback to synthesize an extra latch.

Foldback Bus

Each macrocell can also generate a foldback product term. This signal goes to the regional bus and is available to the 16 macrocells in a given logic block. The foldback is an inverse polarity of one of the macrocell's product terms. Although Cascade Logic is the preferred method for expanding the number of macrocell inputs to as many as 40, the 16 foldback terms in each region can also generate additional fan-in sum terms with nominal additional delay.

Flip-flop

The ATF15xxAE Family's flip-flop has very flexible data and control functions. The data input can come from either the XOR gate, from a separate product term or directly from the I/O pin. Selecting the separate product term allows creation of a buried registered feedback within a combinatorial output or vice-versa. (This enhanced function is automatically implemented by the fitter software). The flip-flop can be configured for D, T, JK and SR operation, and changes state on the clock's rising edge. It can also be configured as a flow-through latch. In this mode, data passes through when the clock is high and is latched when the clock is low.

When a GCK signal is used as the clock, one of the macrocell product terms can be selected as a clock enable. When the clock enable function is active and the enable signal (product term) is low, all clock edges are ignored. The flip-flop has asynchronous reset and preset. The flip-flop's asynchronous reset signal (AR) can be either the Global Clear (GCLEAR), a product term, or always off. AR can also be a logic OR of GCLEAR with a product term. The asynchronous preset (AP) can be a product term or always off.

Extra Feedback

The ATF15xxSE Family macrocell output can be selected as registered or combinatorial. The extra buried feedback signal can be either combinatorial or registered signal regardless of whether the output is combinatorial or registered. (This enhanced function is automatically implemented by the fitter software) Feedback of a buried combinatorial output allows the creation of a second latch within a macrocell.


I/O Control

The output enable multiplexer (MOE) controls the output enable signal. Each I/O can be individually configured as an input, output or for bi-directional operation. The output enable for each macrocell can be selected from the true or compliment of the two output enable pins, a subset of the I/O pins, or a subset of the I/O macrocells. This selection is automatically done by the fitter software when the I/O is configured as an input, all macrocell resources are still available, including the buried feedback, expander and cascade logic.


Programmable Pin-keeper Option for Inputs and I/Os

The ATF15xxAE Family offers the option of programming all input and I/O pins with pin-keeper circuits enabled. When any pin is driven high or low and then subsequently left floating, the pin keeper circuit will hold it at that previous high or low-level. This circuitry prevents unused input and I/O lines from floating to intermediate voltage levels, which causes unnecessary power consumption and system noise. The pin-keeper circuits eliminate the need for external pull-up resistors and eliminate their DC power consumption.

Input Diagram

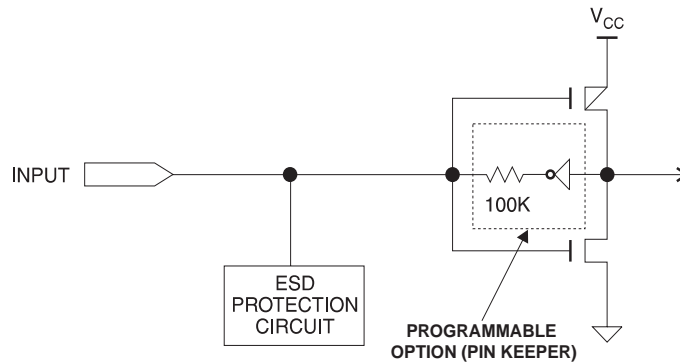

I/O Diagram

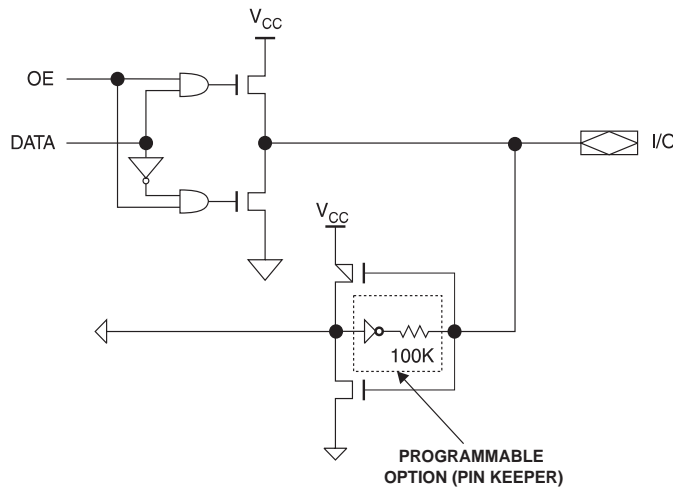

Speed/Power Management

The ATF15xxAE Family has several speed and power management features.

Multiple Power Supplies, Power Sequencing and Hot-Socketing

Because the ATF15xxAE Family can be used in a system with mixture of power supply voltages, it has been designed to function with the V_{CCINT} and V_{CCIO} power supplies applied in any sequence. Also, until the power up sequence completes, the input/output buffers are kept in a high impedance state, and so may be driven but do not drive power out.

Power-on Reset

The ATF15xx Family devices are designed with a power-on reset, a feature critical for state machine initialization. At a point delayed slightly from V_{CC} crossing V_{RST} , all registers will be initialized, and the state of each output will depend on the polarity of its buffer. However, due to the asynchronous nature of reset and uncertainty of how V_{CC} actually rises in the system, the following conditions are required:

1. The V_{CC} rise must be monotonic,
2. After reset occurs, all input and feedback setup times must be met before driving the clock pin high, and,
3. The clock must remain stable during T_D .

The ATF15xx Family has two options for the hysteresis about the reset level, V_{RST} , Small and Large. To ensure a robust operating environment in applications where the device is operated near 3.0V, Atmel recommends that during the fitting process users configure the device with the Power-on Reset hysteresis set to Large.

Power Down of Unused Macrocells

To conserve power, Atmel fitters automatically power down all unused macrocells.

Input Transition Detection/ Automatic Power Down

The ATF15xxAEL versions provide automatic power down to μA level standby power (the “L” suffix indicates “low” power) through Atmel’s patented Input Transition Detection (ITD) circuitry on Global Clocks, Inputs and I/O. These ITD circuits automatically put the device into a low-power standby mode when no logic transitions are occurring. This reduces power consumption during inactive periods, and so provides proportional power-savings for most applications running at system speeds below $f_{critical}$ (~5 MHz).

In clocked applications where the device is operated at a frequency high enough to keep the device from going into standby (above $f_{critical}$), the device will perform at the faster speeds given in the next faster speed column. These higher speeds can be achieved in combinatorial designs as well, as long as, once activated by an initial input transition, the device continues to receive input transitions often enough to keep the device from going into standby mode again. That is, the time between input transitions is less than $1/f_{critical}$.

Reduced-Power per Macrocell

To further reduce power, each ATF15xx Family macrocell has a reduced-power bit feature. With this feature the designer can reduce power by 50% or more for logic that does not need to operate at the maximum switching speed. The reduced-power bit may be activated by changing the default OFF to ON for any or all macrocells. For macrocells in reduced-power mode (reduced-power bit turned on), the reduced-power adder, t_{RPA} , must be added to the AC parameters, which include the data paths t_{LAD} , t_{LAC} , t_{IC} , t_{ACL} , t_{ACH} and t_{SEXP} . All power-down AC characteristic parameters are computed from external input or I/O pins, with the reduced-power bit turned on.

Slew Rate Control

Each output also has individual slew rate control. This may be used to reduce system noise by slowing down outputs that do not need to operate at maximum speed. Outputs default to slow switching. The slew rate option is selected in the design source file.

Pin Controlled Power-down

All ATF15xx Family devices also have an optional pin-controlled power-down mode. When activated, one or both of two pins, PD1 and PD2, can act as power-down pins. The device goes into power-down when either PD1 or PD2 pins (or both) are high, and the device supply current is reduced to less than 1 mA. Also, all internal logic signals are latched and held, as are any enabled outputs. Therefore, all registered and combinatorial output data remain valid. Any outputs that were in a high-Z state at the onset will remain at high-Z. Input and I/O hold

latches remain active to ensure that pins do not float to indeterminate levels, further reducing system power. All pin transitions are ignored until the PD pin is brought low. When the power-down feature is enabled for PD1 or PD2, that pin cannot be used as a logic input or output. However, the pin's macrocell may still be used to generate buried foldback and cascade logic signals. The power-down option is selected in the design source file.

Power Consumption Estimates

An estimate of power consumption can be made based on typical designs and operation conditions, but because it is sensitive to these factors, power consumption must be verified with actual pattern and operation conditions. The equations given below are based on a pattern of 16-bit up/down counters in each logic block and may be used to estimate power consumption for both operating modes.

Standby Power

$$1. P_{\text{standby}} = I_{\text{ccstandby}} \times V_{\text{supply}}$$

Where:

$I_{\text{ccstandby}}$ = the standby current given for the particular device and standby mode (e.g., pin controlled Power Down)

V_{supply} = the power supply voltage

Active Power

$$2. P_{\text{active}} = P_{\text{internal}} + P_{\text{load}} = I_{\text{ccinternal}} \times V_{\text{supply}} + P_{\text{load}}$$

Where:

$I_{\text{ccinternal}}$ = the internal current estimated from equation 3 below

V_{supply} = the power supply voltage

P_{load} = depends on the device output load capacitance and switching frequency on each output pin.

P_{load} and additional power savings at low frequencies using Atmel Input Transition Detection ("L" versions) can be estimated according to the methods discussed in the Atmel Application Note "Saving Power with Atmel PLDs"

$$3. I_{\text{ccinternal}} = [K_1 \times (MC_{\text{inuse}} - MC_{\text{reducedpower}})] + (K_2 \times MC_{\text{reducedpower}}) + (K_3 \times MC_{\text{inuse}} \times f_{\text{op}} \times \text{NS})$$

Where:

$MC_{\text{reducedpower}}$ = the number of macrocells operating at reduced power (from fitter report file)

MC_{inuse} = the number of macrocells in use (from fitter report file. Unused macrocells are powered down.)

NS = the proportion of logic nodes switching (typically 10-20%)

f_{op} = the switching frequency

K_1 , K_2 , and K_3 = device constants given in the table below.

| Device | K_1 | K_2 | K_3 |
|-----------|-------|-------|-------|
| ATF1502AE | 0.6 | 0.3 | 0.015 |
| ATF1504AE | 0.6 | 0.3 | 0.015 |
| ATF1508AE | 0.6 | 0.3 | 0.015 |
| ATF1516AE | 0.6 | 0.3 | 0.015 |
| ATF1532AE | 0.6 | 0.3 | 0.015 |

Note: Shaded data is preliminary and subject to change without notice.



Design Software

Atmel ATF15xx Family fitters allow logic synthesis using a variety of high-level description languages and formats. ATF15xx Family designs are supported by Atmel specific design tools as well as by several third-party tools. Free conversion software is also offered for industry standard devices. Check the Atmel web site or contact your authorized Atmel sales representative for up-to-date design software information.

Programming

ATF15xx Family devices can be programmed using standard third-party programmers. With third-party programmers, the JTAG ISP port can be disabled thereby allowing four additional I/O pins to be used for logic. Check the Atmel web site, contact your authorized Atmel sales representative or Atmel PLD Applications for details of third-party programmers.

ATF15xx Family devices are in-system programmable (ISP) devices utilizing the 4-pin JTAG protocol. This capability eliminates package handling normally required for programming and facilitates rapid design iterations and field changes. Atmel provides ISP hardware and software to allow programming of the ATF15xx Family via the PC. ISP is performed by using either a download cable, a compatible board tester or a simple microprocessor interface.

It is most common to devote the JTAG pins to ISP, but it is possible to use ISP to program the part through the JTAG pins, and set these four pins I/O pins. However, this will effectively disable further ISP and the device will need to be erased on a programmer to re-enable ISP. Contact Atmel PLD Applications by e-mail at pld@atmel.com or call our Hotline at (408) 436-4333 for details.

To allow ISP programming support by the Automated Test Equipment (ATE) vendors, Serial Vector Format (SVF) files can be created by the Atmel ISP software. Conversion to other ATE tester formats is also possible. Check the Atmel web site for up-to-date programming and software support information.

ISP Programming Protection

The ATF15xx Family also incorporates a protection feature that locks the device and prevents the inputs and I/O from driving if the programming process is interrupted for any reason. The inputs and I/O default to high-Z state during such a condition. In addition the pin-keeper option preserves the former state during device programming.

All ATF15xx Family devices are initially shipped in the erased state thereby making them ready to use for ISP.

For more information refer to the "Designing for In-System Programmability with Atmel CPLDs" application note.

Security Fuse Usage

A single fuse is provided to prevent unauthorized copying of the ATF15xx Family fuse patterns. Once programmed, fuse verify is inhibited. However, the User Signature and device ID remain accessible.

JTAG-BST Overview

The JTAG-BST (JTAG boundary-scan testing) is controlled by the Test Access Port (TAP) controller. The boundary-scan technique involves the inclusion of a shift-register stage (contained in a boundary-scan cell) adjacent to each component so that signals at component boundaries can be controlled and observed using scan testing principles. Each input pin and I/O pin has its own Boundary-scan Cell (BSC) in order to support boundary-scan testing. The ATF15xxAE Family does not currently include a Test Reset (TRST) input pin because the TAP controller is automatically reset at power-up. The ATF15xx Family implements six BST instructions, and seven Atmel-defined In System Programming (ISP) instructions. All ATF15xx Family BST and ISP instructions have a length of 10 bits.

| JTAG BST Instructions | Description |
|-----------------------|--|
| SAMPLE/PRELOAD | Captures signals at the device pins for later examination, or loads a data pattern prior to an EXTEST instruction. |
| EXTEST | Allows testing of off-chip circuitry and interconnections by forcing a pattern on the output pins or capturing signals from the input pins. |
| BYPASS | Places a single shift register stage between TDI and TDO, allowing test BST data to pass through a particular device in a chain of devices. |
| IDCODE | Places the 32-bit IDCODE register between TDI and TDO, allowing the IDCODE data to be shifted out of TDO. |
| UESCODE | Places the 16-bit user electronic signature register between TDI and TDO, allowing the UESCODE data to be shifted out of TDO. |
| HIGHZ | Places the BYPASS register between TDI and TDO in a high impedance mode, protecting the device from damage from externally applied test signals. |
| 7 ISP instructions | These seven instructions allow in-system programming via the four JTAG pins. |

The ATF15xx Family BST implementation complies with the Boundary-scan Definition Language (BSDL) described in the JTAG specification (IEEE Standard 1149.1). Any third-party tool that supports the BSDL format can be used to perform BST on the ATF15xx Family.

The ATF15xx Family also has the option of using four JTAG-standard I/O pins for in-system programming (ISP). The ATF15xx Family is programmable through the four JTAG pins using programming-compatible with the IEEE JTAG Standard 1149.1. Programming is performed by using 5V TTL-level programming signals from the JTAG ISP interface. The JTAG feature is a programmable option. If JTAG (BST or ISP) is not needed, then the four JTAG control pins are available as I/O pins. Refer to Atmel Application Note "Designing for In-System Programmability with Atmel CPLDs for more details.

JTAG Boundary-scan Cell (BSC) Testing

The ATF15xx Family has four dedicated input pins and a number of I/O pins depending on the device type and package type selected. Each input pin and I/O pin has a boundary-scan cell (BSC) which supports boundary-scan testing as described in detail by IEEE Standard 1149.1. A typical BSC consists of three capture registers or scan registers and up to two update registers. There are two types of BSCs, one for input or I/O pin, and one for the macrocells. The BSCs in the device are chained together through the (BST) capture registers. Input to the capture register chain is fed in from the TDI pin while the output is directed to the TDO pin. Capture registers are used to capture active device data signals, to shift data in and out of the device and to load data into the update registers. Control signals are generated internally by the JTAG TAP controller.

| Device | Boundary-Scan Register Length | IDCODE | |
|-----------|-------------------------------|---|-----|
| | | MSB | LSB |
| ATF1502AE | 96 | 0000,0001,0101,0100,0010,0000,0011,1111 | |
| ATF1504AE | 192 | 0000,0001,0101,0100,0100,0000,0011,1111 | |
| ATF1508AE | 352 | 0000,0001,0101,0100,1000,0000,0011,1111 | |
| ATF1516AE | 672 | 0000,0001,0101,0101,0000,0000,0011,1111 | |
| ATF1532AE | 1232 | 0000,0001,0101,0110,0000,0000,0011,1111 | |


Note: Shaded data is preliminary and subject to change without notice.

Boundary-scan Definition Language (BSDL) Models


These are now available in all package types via the Atmel web site. These models conform to the IEEE 1149.1 standard and can be used for Boundary-scan Test Operation of the ATF15xx Family.

The BSC configuration for the input and I/O pins and macrocells are shown below.

BSC Configuration for Pins (Except JTAG TAP Pins)

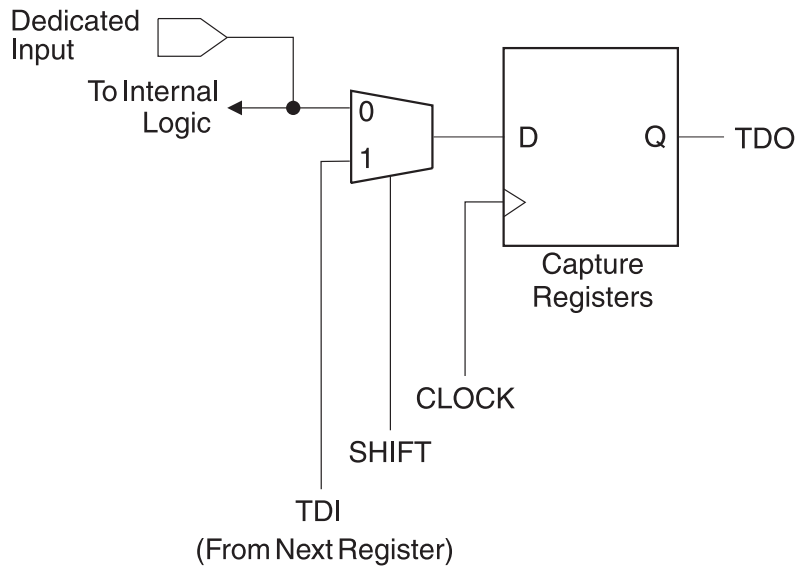

BSC Configuration for Macrocell

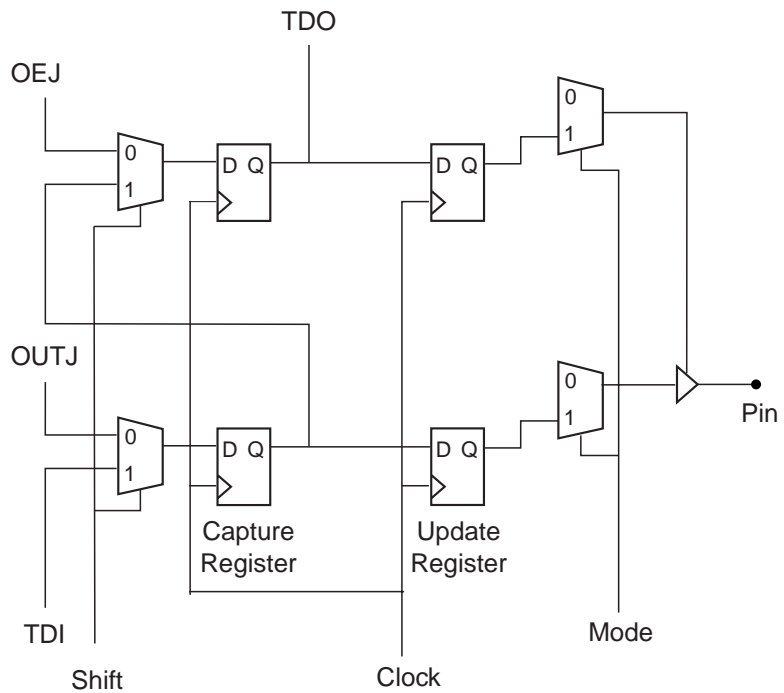


Macrocell BSC


PCI Compliance

The ATF15xx Family also supports peripheral component interconnect (PCI) interface standard in PCI-based designs and specifications. The PCI interface calls for high current drivers, which are much larger than the traditional TTL drivers.


PCI Voltage-to-current Curves for +5V Signaling in Pull-up Mode

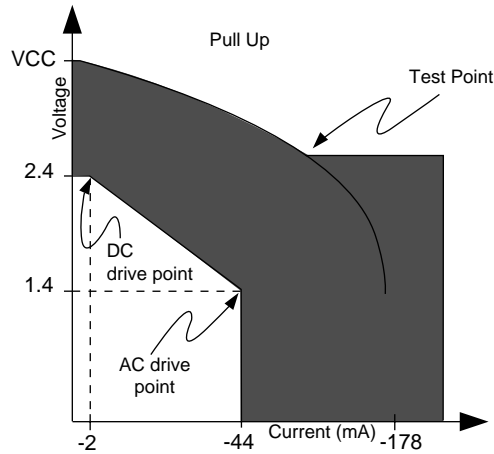

PCI Voltage-to-current Curves for +5V Signaling in Pull-down Mode

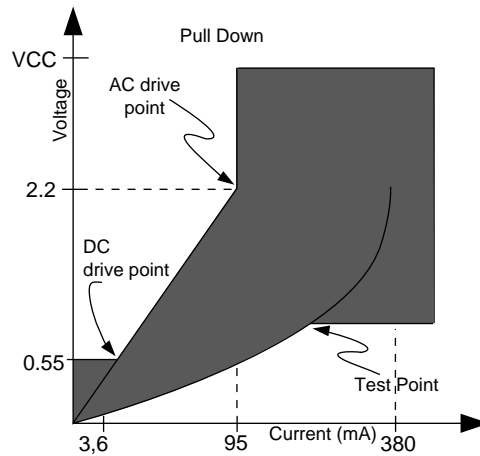

Timing Model

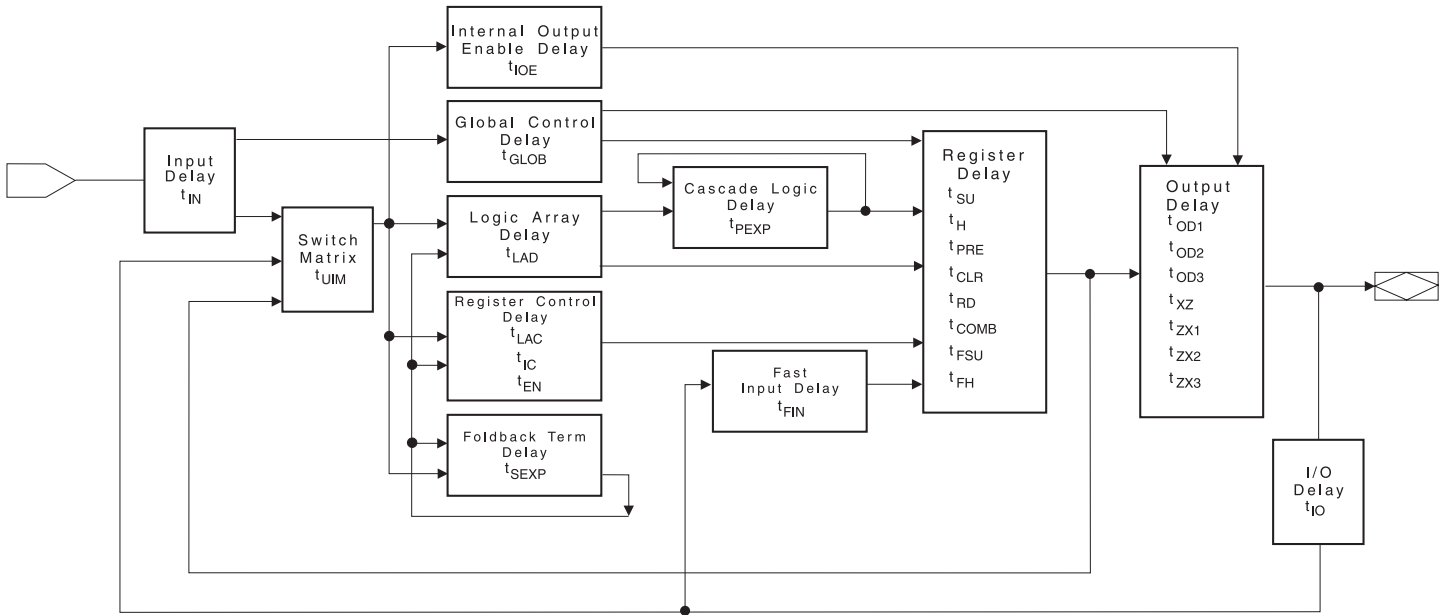


Pin Capacitance


| | Typ ⁽¹⁾ | Max | Units | Condition |
|-----------|--------------------|-----|-------|--------------------------------|
| C_{IN} | | 8 | pF | $V_{IN} = 0V$; $f = 1.0$ MHz |
| $C_{I/O}$ | | 8 | pF | $V_{OUT} = 0V$; $f = 1.0$ MHz |

Note: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested. The OGI pin (high-voltage pin during programming) has a maximum capacitance of 12 pF.

Input Test Waveforms and Measurement Levels

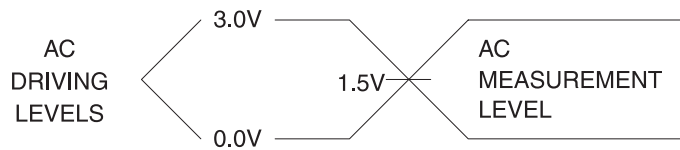

Output AC Test Loads



Absolute Maximum Ratings*

| | |
|--|--------------------------------|
| Ambient Temperature Under Bias..... | -65°C to +135°C |
| Storage Temperature | -65°C to +150°C |
| Junction Temperature | 150°C _(MAX) |
| Voltage on Any Pin with Respect to Ground | -2.0V to +5.75V ⁽¹⁾ |
| Voltage on Input Pins with Respect to Ground During Programming..... | -2.0V to +14.0V ⁽¹⁾ |
| Programming Voltage with Respect to Ground | -2.0V to +14.0V ⁽¹⁾ |
| DC Output Current per Pin | -25 to +25 mA |

***NOTICE:** Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note: 1. For currents less than 100 mA, minimum voltage is -0.6 VDC and maximum voltage is $V_{CC} + 0.75$ VDC. Pulses of less than 20µs may undershoot to -2.0V or overshoot to 5.75V.

DC and AC Operating Conditions

| | Commercial | Industrial |
|--|----------------|----------------|
| Operating Temperature (Ambient), T_A | 0°C - 70°C | -40°C - 85°C |
| Junction Temperature, T_J ⁽¹⁾ | – | – |
| V_{CCINT} (3.3V) Power Supply | 3.0V - 3.6V | 3.0V - 3.6V |
| V_{CCIO} (3.3V) Power Supply | 3.0V - 3.6V | 3.0V - 3.6V |
| V_{CCIO} (2.5V) Power Supply | 2.3V - 2.7V | 2.3V - 2.7V |
| V_I Input Voltage | -0.5V - 5.75V | -0.5V - 5.75V |
| V_O Output Voltage | 0 - V_{CCIO} | 0 - V_{CCIO} |
| t_R Input Rise Time | 40 ns Max | 40 ns Max |
| t_F Input Fall Time | 40 ns Max | 40 ns Max |

Note: 1. Junction temperature is package and device dependant and can be calculated as follows: $T_{J(MAX)} = T_{A(MAX)} + (\theta_{JA}|_{Air\ Flow = 0} * P_{(MAX)})$. For more information, see “Thermal Characteristic's of Atmel Packages”

DC Characteristics⁽¹⁾

| Symbol | Parameter | Condition | Min | Typ | Min | Unit | | |
|-----------------|--|--|--------------------|------|------|---------|----|----|
| I_I | Input Leakage Current | $V_{IN} = V_{CCINT}$ or Ground | -10 | | 10 | μA | | |
| I_{OZ} | Tri-State Output Off-State Current | $V_O = V_{CCINT}$ or GND | -10 | | 10 | μA | | |
| I_{CC1} | Power Supply Current, Standby | $V_{CCINT} = \text{Max}$ $V_{IN} = 0, V_{CCINT}$ | Std Mode | Com. | | Note 3 | mA | |
| | | | | Ind. | | Note 3 | mA | |
| | | | "ITD" Mode | Com. | | 1 | | mA |
| | | | | Ind. | | 1 | | mA |
| I_{CC2} | Power Supply Current, Power-down Mode | $V_{CCINT} = \text{Max}$ $V_{IN} = 0, V_{CCINT}$ | PD Mode | | 0.1 | 1 | mA | |
| $I_{CC3}^{(2)}$ | Reduced-power Mode Supply Current, Standby | $V_{CCINT} = \text{Max}$ $V_{IN} = 0, V_{CCINT}$ | Std Mode | Com. | | Note 3 | mA | |
| | | | | Ind. | | Note 3 | mA | |
| V_{IL} | Input Low Voltage | | -0.5 | | 0.8 | V | | |
| V_{IH} | Input High Voltage | | 1.7 | | 5.75 | V | | |
| V_{OL} | 3.3V Output Low Voltage (TTL) | $V_{CCIO} = 3.0V, I_{OL} = 8 \text{ mA}$ | Com. | | 0.45 | V | | |
| | | | Ind. | | 0.45 | V | | |
| | 3.3V Output Low Voltage (CMOS) | $V_{CCIO} = 3.0V, I_{OL} = 0.1 \text{ mA}$ | Com. | | 0.2 | V | | |
| | | | Ind. | | 0.2 | V | | |
| | 2.5V Low Voltage | $I_{OL} = 100 \mu A, V_{CCIO} = 2.3V$ | | | .2 | V | | |
| | | | | | .4 | V | | |
| | | | | .7 | V | | | |
| V_{OH} | Output High Voltage -3.3V (TTL) | $V_{CCIO} = 3.0V, I_{OH} = -2.0 \text{ mA}$ | 2.4 | | | V | | |
| | Output High Voltage -3.3V (CMOS) | $V_{IN} = V_{IH}$ or V_{IL} $V_{CCIO} = 3.0V, I_{OH} = -0.1 \text{ mA}$ | V_{CCIO} -0.2 | | | V | | |
| | 2.5V High Voltage | $I_{OH} = -100 \mu A, V_{CCIO} = 2.3V$ | | 2.1 | | | V | |
| | | | | 2.0 | | | V | |
| | | | | 1.7 | | | V | |

- Notes: 1. Not more than one output at a time should be shorted. Duration of short circuit test should not exceed 30 sec.
 2. I_{CC3} refers to the current in the reduced-power mode when macrocell reduced-power is turned ON.
 3. See Characterization Curves for each device.

Power-down AC Characteristics⁽¹⁾

| Symbol | Parameter | -4, -5 | | -7 | | -10 | | -12 | | -15 | | Unit |
|-------------|---|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | |
| t_{IVDH} | Valid 1, I/O before PD High | 4.5 | | 7.5 | | 10 | | 12 | | 15 | | ns |
| $t_{GV DH}$ | Valid 1, OE ⁽²⁾ before PD High | 4.5 | | 7.5 | | 10 | | 12 | | 15 | | ns |
| t_{CVDH} | Valid 1, Clock ⁽²⁾ before PD High | 4.5 | | 7.5 | | 10 | | 12 | | 15 | | ns |
| t_{DHIX} | I, I/O Don't Care after PD High | | 9.0 | | 15 | | 20 | | 22 | | 25 | ns |
| t_{DHGX} | OE ⁽²⁾ Don't Care after PD High | | 9.0 | | 15 | | 20 | | 22 | | 25 | ns |
| t_{DHCX} | Clock ⁽²⁾ Don't Care after PD High | | 9.0 | | 15 | | 20 | | 22 | | 25 | ns |
| t_{DLIV} | PD Low to Valid I, I/O | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | μs |

Power-down AC Characteristics⁽¹⁾

| Symbol | Parameter | -4, -5 | | -7 | | -10 | | -12 | | -15 | | Unit |
|-------------------|--------------------------------------|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{DLGV} | PD Low to Valid OE, (Pin or Term) | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | μs |
| t _{DLCV} | PD Low to Valid Clock, (Pin or Term) | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | μs |
| t _{DLOV} | PD Low to Valid Output | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | μs |

Notes: 1. For slow slew outputs, add t_{SSO}.
2. Pin or product term.

AC Characteristics ATF1502AE(L)⁽¹⁾


| Symbol | Parameter | AE -4 | | AE -7 | | AE -10 | | AEL-15 ⁽⁶⁾ | | Unit |
|----------------------------------|--|-------|-----|-------|-----|--------|-----|-----------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PD1} | Input or Feedback to Non-registered Output | | 4.5 | | 7.5 | | 10 | | 15 | ns |
| t _{PD2} | I/O Input or Feedback to Non-registered Feedback | | 4.5 | | 7.5 | | 10 | | 12 | ns |
| t _{SU} | Global Clock Setup Time | 2.9 | | 4.7 | | 6.3 | | 11 | | ns |
| t _H | Global Clock Hold Time | 0.0 | | 0.0 | | 0.0 | | 0.0 | | ns |
| t _{FSU} | Global Clock Setup Time of Fast Input | 2.5 | | 3.0 | | 3.0 | | 3.0 | | ns |
| t _{FH} | Global Clock Hold of Fast Input | 0.0 | | 0.0 | | 0.0 | | 1.0 | | MHz |
| t _{COP} | Global Clock to Output Delay | 1.0 | 3.0 | 1.0 | 5.0 | 1.0 | 6.7 | 1.0 | 8.0 | ns |
| t _{CH} | Global Clock High Time | 2.0 | | 3.0 | | 4.0 | | 5.0 | | ns |
| t _{CL} | Global Clock Low Time | 2.0 | | 3.0 | | 4.0 | | 5.0 | | ns |
| t _{ASU} | Array Clock Setup Time | 1.6 | | 2.5 | | 3.6 | | 4.0 | | ns |
| t _{AH} | Array Clock Hold Time | 0.3 | | 0.5 | | 0.5 | | 4.0 | | ns |
| t _{ACOP} | Array Clock Output Delay | 1.0 | 4.3 | 1.0 | 7.2 | 1.0 | 9.4 | 1.0 | 15 | ns |
| t _{ACH} | Array Clock High Time | 2.0 | | 3.0 | | 4.0 | | 6.0 | | ns |
| t _{ACL} | Array Clock Low Time | 2.0 | | 3.0 | | 4.1 | | 6.0 | | ns |
| t _{CNT} | Minimum Clock Global Period | | 4.4 | | 7.2 | | 9.7 | | 13 | ns |
| f _{CNT} ⁽³⁾ | Maximum Internal Global Clock Frequency | 225 | | 133 | | 100 | | 77 | | MHz |
| t _{ACNT} | Minimum Array Clock Period | | 4.4 | | 7.2 | | 9.7 | | 13 | ns |
| f _{ACNT} ⁽⁴⁾ | Maximum Internal Array Clock Frequency | 225 | | 133 | | 100 | | 77 | | MHz |
| f _{MAX} ⁽⁵⁾ | Maximum Clock Frequency | 230 | | 140 | | 100 | | 77 | | MHz |
| t _{IN} | Input Pad and Buffer Delay | | 0.7 | | 1.2 | | 1.5 | | 2.0 | ns |
| t _{IO} | I/O Input Pad and Buffer Delay | | 0.7 | | 1.2 | | 1.5 | | 2.0 | ns |
| t _{FIN} | Fast Input Delay | | 2.3 | | 2.8 | | 3.4 | | 2.0 | ns |
| t _{SEXP} | Foldback Term Delay | | 1.9 | | 3.1 | | 4.0 | | 8.0 | ns |
| t _{PEXP} | Cascade Logic Delay | | 0.5 | | 0.8 | | 1.0 | | 1.0 | ns |
| t _{LAD} | Logic Array Delay | | 1.5 | | 2.5 | | 3.3 | | 6.0 | ns |
| t _{LAC} | Logic Control Delay | | 0.6 | | 1.0 | | 1.2 | | 3.5 | ns |
| t _{IOE} | Internal Output Enable Delay | | 0.0 | | 0.0 | | 0.0 | | 3.0 | ns |

AC Characteristics ATF1502AE(L)⁽¹⁾ (Continued)


| Symbol | Parameter | AE -4 | | AE -7 | | AE -10 | | AEL-15 ⁽⁶⁾ | | Unit |
|---------------------------------|--|-------|-----|-------|-----|--------|------|-----------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{OD1} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 0.8 | | 1.3 | | 1.8 | | 3.0 | ns |
| t _{OD2} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 1.3 | | 1.8 | | 2.3 | | 3.0 | ns |
| t _{OD3} | Output Buffer and Pad Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 5.8 | | 6.3 | | 6.8 | | 5.0 | ns |
| t _{ZX1} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 4.0 | | 4.0 | | 5.0 | | 7.0 | ns |
| t _{ZX2} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 4.5 | | 4.5 | | 5.5 | | 7.0 | ns |
| t _{ZX3} | Output Buffer Enable Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 9.0 | | 9.0 | | 10.0 | | 10 | ns |
| t _{XZ} | Output Buffer Disable Delay (C _L = 5pF) | | 4.0 | | 4.0 | | 5.0 | | 6.0 | ns |
| t _{SU} | Register Setup Time | 1.3 | | 2.0 | | 2.8 | | 4.0 | | ns |
| t _H | Register Hold Time | 0.6 | | 1.0 | | 1.3 | | 4.0 | | ns |
| t _{FSU} | Register Setup Time of Fast Input | 1.0 | | 1.5 | | 1.5 | | 2.0 | | ns |
| t _{FH} | Register Hold Time of Fast Input | 1.5 | | 1.5 | | 1.5 | | 2.0 | | ns |
| t _{RD} | Register Delay | | 0.7 | | 1.2 | | 1.5 | | 2.0 | ns |
| t _{COMB} | Combinatorial Delay | | 0.6 | | 1.0 | | 1.3 | | 2.0 | ns |
| t _{IC} | Array Clock Delay | | 1.2 | | 2.0 | | 2.5 | | 7.0 | ns |
| t _{EN} | Register Enable Time | | 0.6 | | 1.0 | | 1.2 | | 7.0 | ns |
| t _{GLOB} | Global Control Delay | | 0.8 | | 1.3 | | 1.9 | | 1.0 | ns |
| t _{PRE} | Register Preset Time | | 1.2 | | 1.9 | | 2.6 | | 5.0 | ns |
| t _{CLR} | Register Clear Time | | 1.2 | | 1.9 | | 2.6 | | 5.0 | ns |
| t _{UIM} | Switch Matrix Delay | | 0.9 | | 1.5 | | 2.1 | | 2.0 | ns |
| t _{RPA} ⁽²⁾ | Reduced Power Adder | | 2.5 | | 4.0 | | 5.0 | | 14 | ns |

- Notes:
1. See ordering information for valid part numbers.
 2. The t_{RPA} parameter must be added to the t_{LAD}, t_{LAC}, t_{IC}, t_{ACL} and t_{SEXP} parameters for macrocells running in the reduced-power mode.
 3. f_{CNT} is the fastest 16-bit counter frequency available, using the local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells). f_{CNT} is also the Export Control Maximum flip-flop toggle rate, f_{TOG}.
 4. f_{ACNT} is the fastest 16-bit counter frequency available, using the internal array clock, local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells).
 5. f_{MAX} is the fastest available frequency for pipeline data.
 6. For clocked applications and frequencies above f_{critical}, OR, non-clocked applications with dormant times less than 1/f_{critical}, the device will achieve the speeds of the -10 column. (See "ITD/automatic power down.")


**STAND-BY I_{CC} VS.
SUPPLY VOLTAGE ($T_A = 25^\circ\text{C}$)**

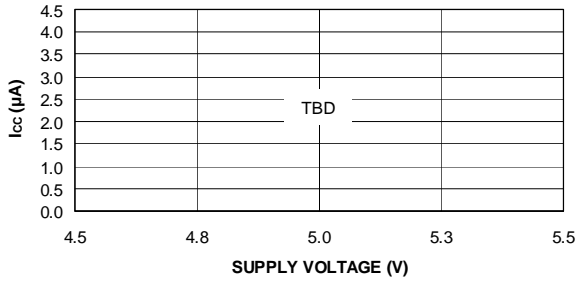


NORMALIZED I_{CC} VS. TEMP

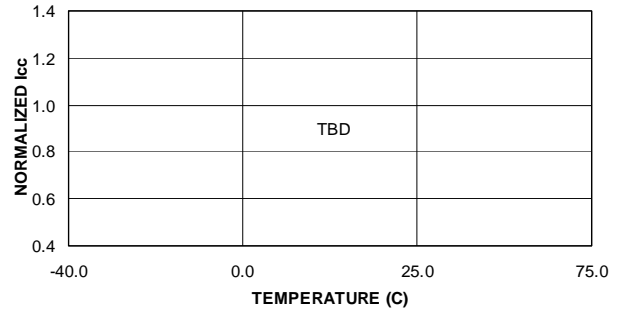


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

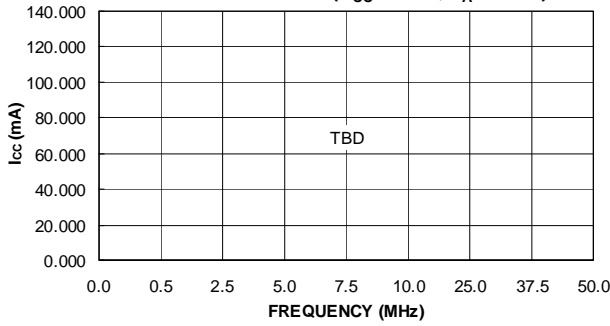


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

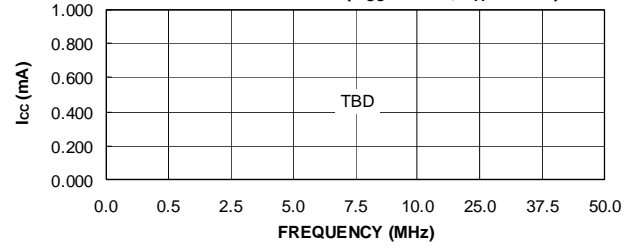


**OUTPUT SOURCE CURRENT VS.
SUPPLY VOLTAGE ($V_{OH} = 2.4\text{V}$)**

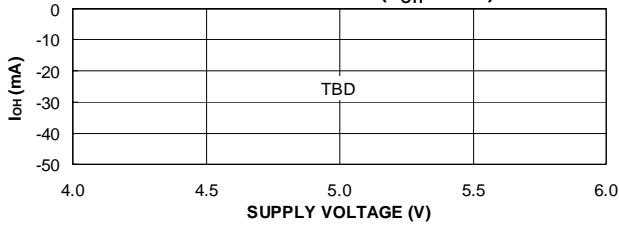


**OUTPUT SOURCE CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**








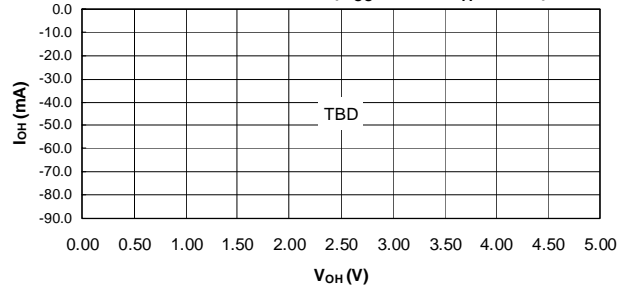






**OUTPUT SINK CURRENT VS.
SUPPLY VOLTAGE ($V_{OL} = 0.5\text{V}$)**

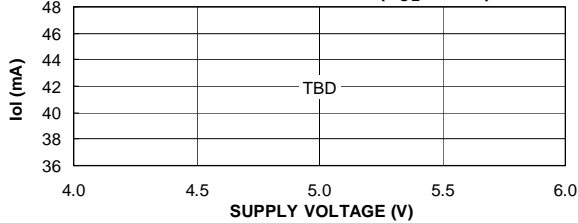

**OUTPUT SINK CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

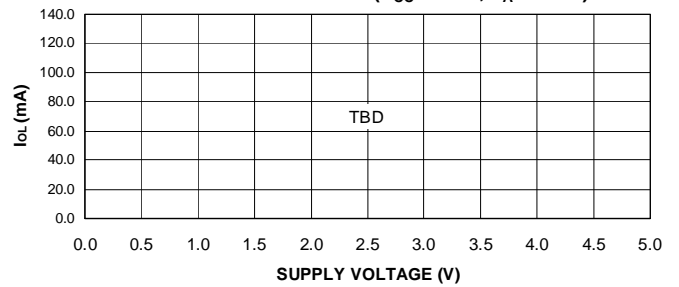


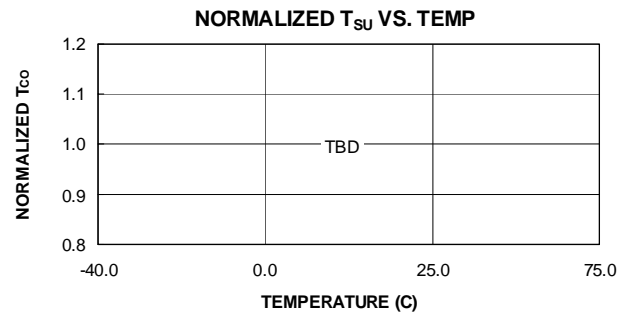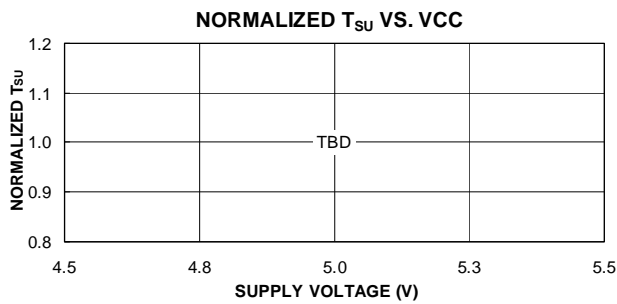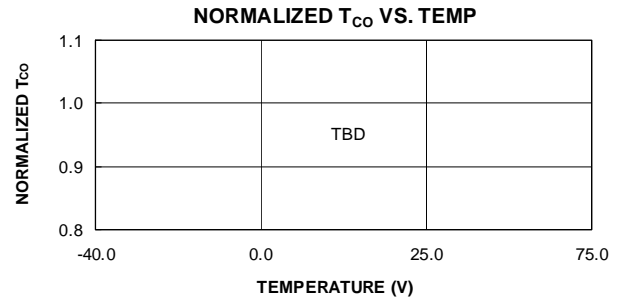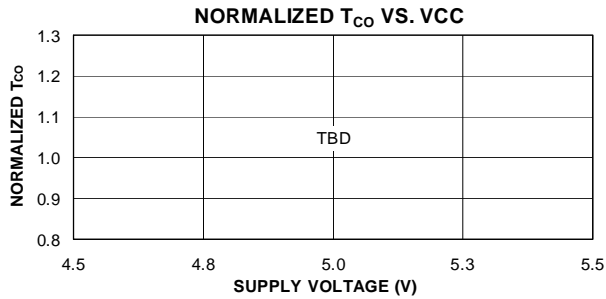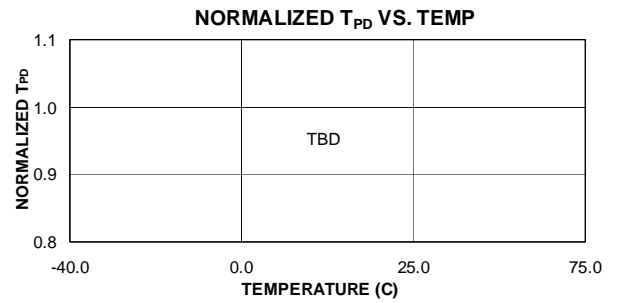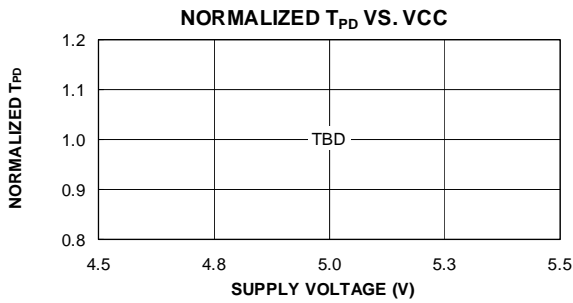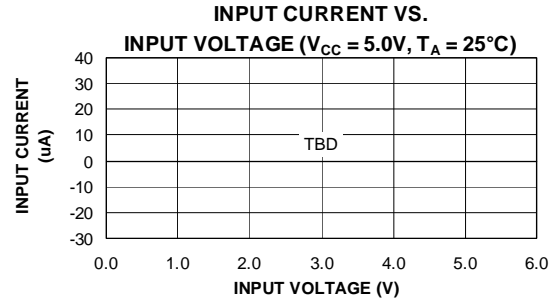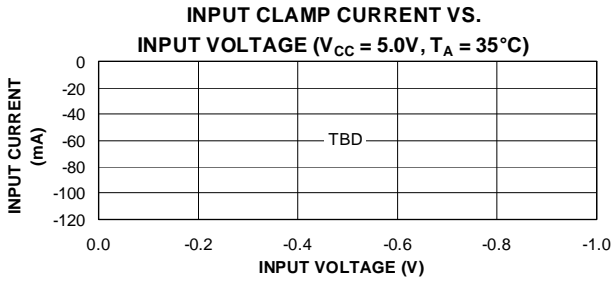

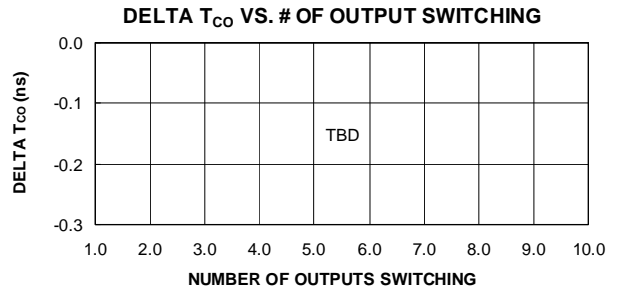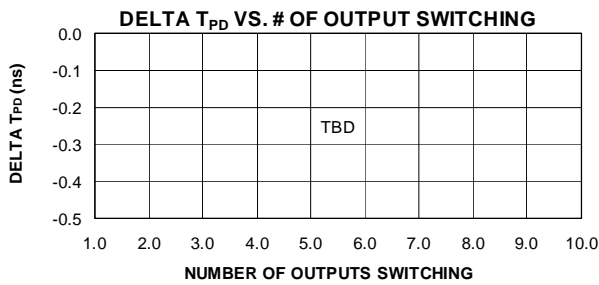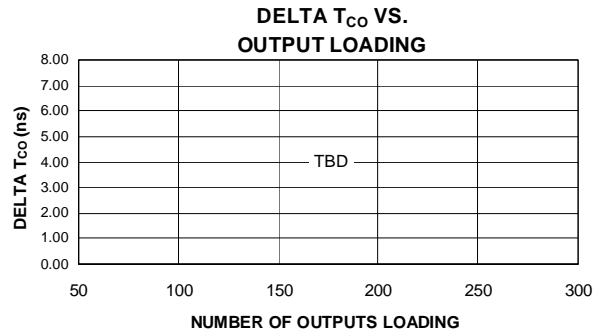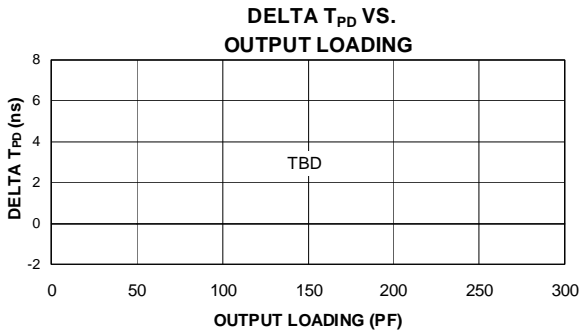


ATF1502AE(L) Pinouts

44-lead PLCC

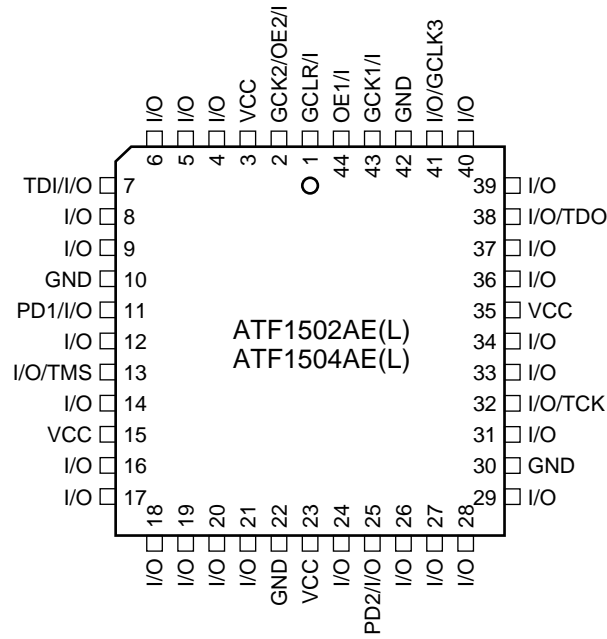

44-lead TQFP

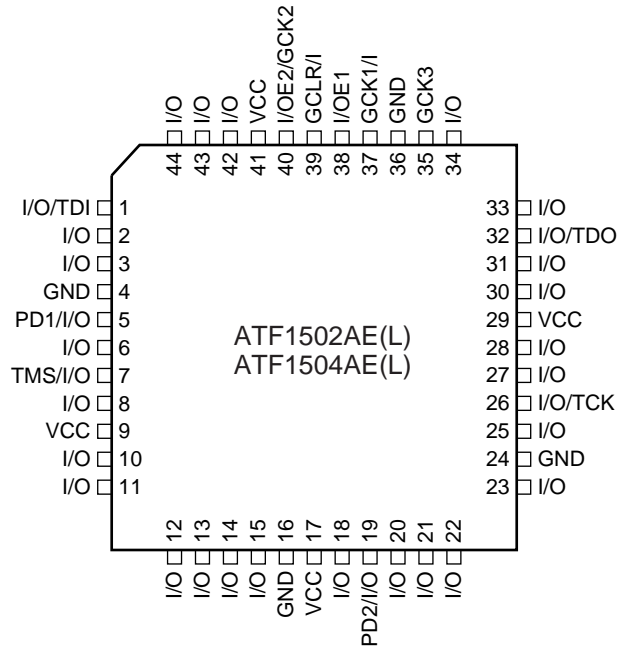



ATF1502AE(L) Dedicated Pinouts

| Dedicated Pin | 44-lead J-lead | 44-lead TQFP |
|------------------|-------------------|-----------------|
| INPUT/OE2/GCLK2 | 2 | 40 |
| INPUT/GCLR | 1 | 39 |
| INPUT/OE1 | 44 | 38 |
| INPUT/GCLK1 | 43 | 37 |
| I/O/GCLK3 | 41 | 35 |
| I/O/PD (1,2) | 11, 25 | 5, 19 |
| I/O/TDI (JTAG) | 7 | 1 |
| I/O/TMS (JTAG) | 13 | 7 |
| I/O/TCK (JTAG) | 32 | 26 |
| I/O/TDO (JTAG) | 38 | 32 |
| GNDINT | 22, 42 | 16, 36 |
| GNDIO | 10, 30 | 4, 24 |
| VCCINT | 3, 23 | 17, 41 |
| VCCIO | 15, 35 | 9, 29 |
| # of Signal Pins | 36 | 36 |
| # User I/O Pins | 32 | 32 |

OE (1, 2) Global OE pins

GCLR Global Clear pin

GCLK (1, 2, 3) Global Clock pins

PD (1, 2) Power-down pins

TDI, TMS, TCK, TDO JTAG pins used for boundary-scan testing or in-system programming

GNDINT Ground pins for the internal device logic

GNDIO Ground pins for the I/O drivers

VCCINT VCC pins for the internal device logic (+3.3V)

VCCIO VCC for the I/O drivers

ATF1502AE(L) I/O Pinouts

| MC | PLC | 44-lead PLCC | 44-lead TQFP |
|--------|-----|--------------|--------------|
| 1 | A | 4 | 42 |
| 2 | A | 5 | 43 |
| 3 | A | 6 | 44 |
| 4/TDI | A | 7 | 1 |
| 5 | A | 8 | 2 |
| 6 | A | 9 | 3 |
| 7/PD1 | A | 11 | 5 |
| 8 | A | 12 | 6 |
| 9/TMS | A | 13 | 7 |
| 10 | A | 14 | 8 |
| 11 | A | 16 | 10 |
| 12 | A | 17 | 11 |
| 13 | A | 18 | 12 |
| 14 | A | 19 | 13 |
| 15 | A | 20 | 14 |
| 16 | A | 21 | 15 |
| 17 | B | 41 | 35 |
| 18 | B | 40 | 34 |
| 19 | B | 39 | 33 |
| 20/TDO | B | 38 | 32 |
| 21 | B | 37 | 31 |
| 22 | B | 36 | 30 |
| 23 | B | 34 | 28 |
| 24 | B | 33 | 27 |
| 25/TCK | B | 32 | 26 |
| 26 | B | 31 | 25 |
| 27 | B | 29 | 23 |
| 28 | B | 28 | 22 |
| 29 | B | 27 | 21 |
| 30 | B | 26 | 20 |
| 31/PD2 | B | 25 | 19 |
| 32 | B | 24 | 18 |



ATF1502AE(L) Ordering Information

| t_{PD} (ns) | t_{CO1} (ns) | F_{MAX} (MHz) | Ordering Code | Package | Operation Range |
|------------------|-------------------|--------------------|--------------------|---------|--------------------------------|
| 4.5 | 3.0 | 230 | ATF1502AE-4 AC44 | 44A | Commercial (0°C to 70°C) |
| | | | ATF1502AE-4 JC44 | 44J | |
| 7.5 | 5.0 | 140 | ATF1502AE-7 AC44 | 44A | Commercial (0°C to 70°C) |
| | | | ATF1502AE-7 JC44 | 44J | |
| | | | ATF1502AE-7 AI44 | 44A | Industrial (-40°C to +85°C) |
| | | | ATF1502AE-7 JI44 | 44J | |
| 10.0 | 6.7 | 100 | ATF1502AE-10 AC44 | 44A | Commercial (0°C to 70°C) |
| | | | ATF1502AE-10 JC44 | 44J | |
| | | | ATF1502AE-10 AI44 | 44A | Industrial (-40°C to +85°C) |
| | | | ATF1502AE-10 JI44 | 44J | |
| 15.0 | 8.0 | 77 | ATF1502AEL-15 AC44 | 44A | Commercial (0°C to 70°C) |
| | | | ATF1502AEL-15 JC44 | 44J | |

Using “C” Product for Industrial

There is very little risk in using “C” devices for industrial applications because the V_{CC} conditions for 3.3V products are the same for commercial and industrial (there is only 15°C difference at the high end of the temperature range). To use commercial product for industrial temperature ranges, de-rate I_{CC} by 15%.

| Package Type | |
|--------------|--|
| 44A | 44-lead, Thin Plastic Gull Wing Quad Flatpack (TQFP) |
| 44J | 44-lead, Plastic J-leaded Chip Carrier (PLCC) |

AC Characteristics ATF1504AE(L) ⁽¹⁾


| Symbol | Parameter | AE -4 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|----------------------------------|---|-------|-----|-------|-----|--------|-----|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PD1} | Input or Feedback to Non-registered Output | | 4.5 | | 7.5 | | 10 | | 15 | ns |
| t _{PD2} | I/O Input or Feedback to Non-registered Feedback | | 4.5 | | 7.5 | | 10 | | 12 | ns |
| t _{SU} | Global Clock Setup Time | 2.8 | | 4.7 | | 6.2 | | 11 | | ns |
| t _H | Global Clock Hold Time | 0.0 | | 0.0 | | 0.0 | | 0.0 | | ns |
| t _{FSU} | Global Clock Setup Time of Fast Input | 2.5 | | 3.0 | | 3.0 | | 3.0 | | ns |
| t _{FH} | Global Clock Hold of Fast Input | 0.0 | | 0.0 | | 0.0 | | 1.0 | | MHz |
| t _{COP} | Global Clock to Output Delay | 1.0 | 3.1 | 1.0 | 5.1 | 1.0 | 7.0 | 1.0 | 9.0 | ns |
| t _{CH} | Global Clock High Time | 2.0 | | 3.0 | | 4.0 | | 5.0 | | ns |
| t _{CL} | Global Clock Low Time | 2.0 | | 3.0 | | 4.0 | | 5.0 | | ns |
| t _{ASU} | Array Clock Setup Time | 1.6 | | 2.6 | | 3.6 | | 5.0 | | ns |
| t _{AH} | Array Clock Hold Time | 0.3 | | 0.4 | | 0.6 | | 4.0 | | ns |
| t _{ACOP} | Array Clock Output Delay | 1.0 | 4.3 | 1.0 | 7.2 | 1.0 | 9.6 | 1.0 | 15 | ns |
| t _{ACH} | Array Clock High Time | 2.0 | | 3.0 | | 4.0 | | 6.0 | | ns |
| t _{ACL} | Array Clock Low Time | 2.0 | | 3.0 | | 4.0 | | 6.0 | | ns |
| t _{CNT} | Minimum Clock Global Period | | 4.5 | | 7.4 | | 10 | | 13 | ns |
| f _{CNT} ⁽³⁾ | Maximum Internal Global Clock Frequency | 225 | | 133 | | 100 | | 77 | | MHz |
| t _{ACNT} | Minimum Array Clock Period | | 4.5 | | 7.4 | | 10 | | 13 | ns |
| f _{ACNT} ⁽⁴⁾ | Maximum Internal Array Clock Frequency | 225 | | 133 | | 100 | | 77 | | MHz |
| f _{MAX} ⁽⁵⁾ | Maximum Clock Frequency | 230 | | 140 | | 100 | | 77 | | MHz |
| t _{IN} | Input Pad and Buffer Delay | | 0.6 | | 1.1 | | 1.4 | | 2.0 | ns |
| t _{IO} | I/O Input Pad and Buffer Delay | | 0.6 | | 1.1 | | 1.4 | | 2.0 | ns |
| t _{FIN} | Fast Input Delay | | 2.5 | | 3.0 | | 3.7 | | 2.0 | ns |
| t _{SEXP} | Foldback Term Delay | | 1.8 | | 3.0 | | 3.9 | | 8.0 | ns |
| t _{PEXP} | Cascade Logic Delay | | 0.4 | | 0.7 | | 0.9 | | 1.0 | ns |
| t _{LAD} | Logic Array Delay | | 1.5 | | 2.5 | | 3.2 | | 6.0 | ns |
| t _{LAC} | Logic Control Delay | | 0.6 | | 1.0 | | 1.2 | | 3.5 | ns |
| t _{IOE} | Internal Output Enable Delay | | 0.0 | | 0.0 | | 0.0 | | 3.0 | ns |
| t _{OD1} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 0.8 | | 1.3 | | 1.8 | | 3.0 | ns |
| t _{OD2} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 1.3 | | 1.8 | | 2.3 | | 3.0 | ns |
| t _{OD3} | Output Buffer and Pad Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 5.8 | | 6.3 | | 6.8 | | 5.0 | ns |
| t _{ZX1} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 4.0 | | 4.0 | | 5.0 | | 7.0 | ns |

AC Characteristics ATF1504AE(L) (Continued)⁽¹⁾


| Symbol | Parameter | AE -4 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|---------------------------------|--|-------|-----|-------|-----|--------|------|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{ZX2} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 4.5 | | 4.5 | | 5.5 | | 7.0 | ns |
| t _{ZX3} | Output Buffer Enable Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 9.0 | | 9.0 | | 10.0 | | 10 | ns |
| t _{XZ} | Output Buffer Disable Delay (C _L = 5pF) | | 4.0 | | 4.0 | | 5.0 | | 6.0 | ns |
| t _{SU} | Register Setup Time | 1.3 | | 2.0 | | 2.9 | | 5.0 | | ns |
| t _H | Register Hold Time | 0.6 | | 1.0 | | 1.3 | | 4.0 | | ns |
| t _{FSU} | Register Setup Time of Fast Input | 1.0 | | 1.5 | | 1.5 | | 2.0 | | ns |
| t _{FH} | Register Hold Time of Fast Input | 1.5 | | 1.5 | | 1.5 | | 2.0 | | ns |
| t _{RD} | Register Delay | | 0.7 | | 1.2 | | 1.6 | | 2.0 | ns |
| t _{COMB} | Combinatorial Delay | | 0.6 | | 0.9 | | 1.3 | | 2.0 | ns |
| t _{IC} | Array Clock Delay | | 1.2 | | 1.9 | | 2.5 | | 6.0 | ns |
| t _{EN} | Register Enable Time | | 0.6 | | 1.0 | | 1.2 | | 6.0 | ns |
| t _{GLOB} | Global Control Delay | | 1.0 | | 1.5 | | 2.2 | | 2.0 | ns |
| t _{PRE} | Register Preset Time | | 1.3 | | 2.1 | | 2.9 | | 4.0 | ns |
| t _{CLR} | Register Clear Time | | 1.3 | | 2.1 | | 2.9 | | 4.0 | ns |
| t _{UIM} | Switch Matrix Delay | | 1.0 | | 1.7 | | 2.3 | | 2.0 | ns |
| t _{RPA} ⁽²⁾ | Reduced Power Adder | | 3.5 | | 4.0 | | 5.0 | | 10 | ns |

- Notes:
1. See ordering Information for valid part numbers.
 2. The t_{RPA} parameter must be added to the t_{LAD}, t_{LAC}, t_{IC}, t_{ACL} and t_{SEXP} parameters for macrocells running in the reduced-power mode.
 3. f_{CNT} is the fastest 16-bit counter frequency available, using the local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells). f_{CNT} is also the Export Control Maximum flip-flop toggle rate, f_{TOG}.
 4. f_{ACNT} is the fastest 16-bit counter frequency available, using the internal array clock, local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells).
 5. f_{MAX} is the fastest available frequency for pipeline data.
 6. For clocked applications and frequencies above f_{critical}, OR, non-clocked applications with dormant times less than 1/f_{critical}, the device will achieve the speeds of the -10 column. (See "ITD/automatic power down.")


**STAND-BY I_{CC} VS.
SUPPLY VOLTAGE ($T_A = 25^\circ\text{C}$)**

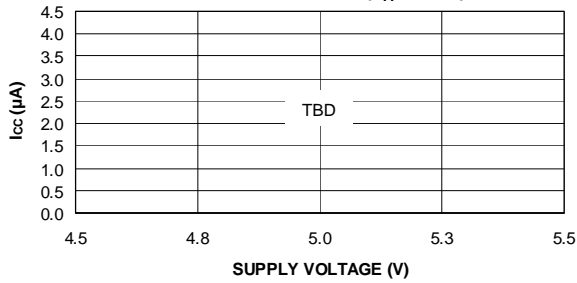


NORMALIZED I_{CC} VS. TEMP

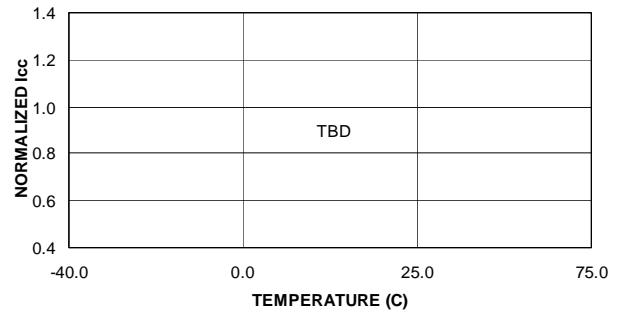


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

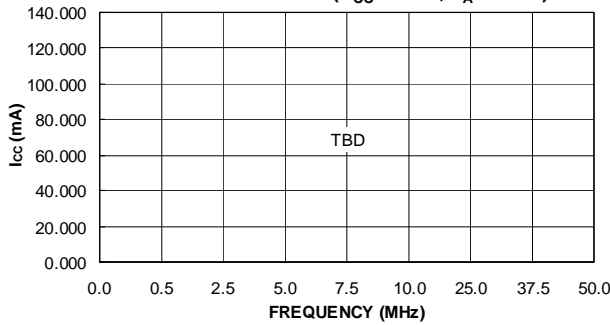


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

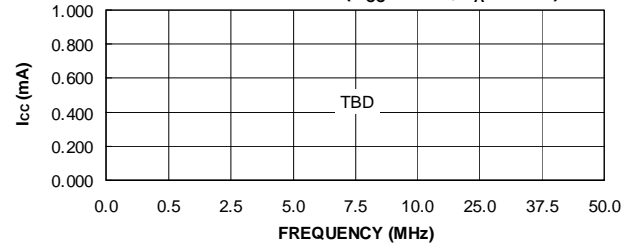


**OUTPUT SOURCE CURRENT VS.
SUPPLY VOLTAGE ($V_{OH} = 2.4\text{V}$)**

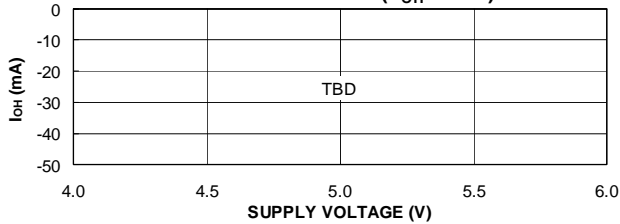


**OUTPUT SOURCE CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**








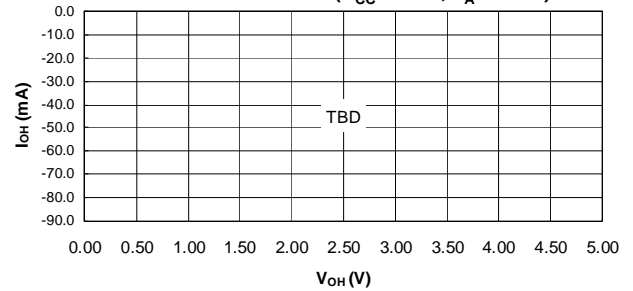






**OUTPUT SINK CURRENT VS.
SUPPLY VOLTAGE ($V_{OL} = 0.5\text{V}$)**

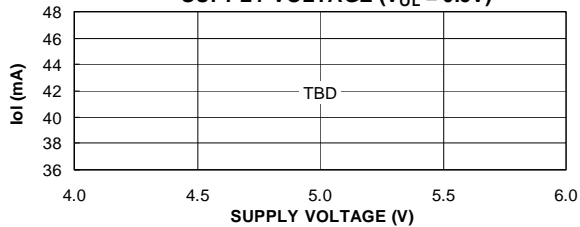

**OUTPUT SINK CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

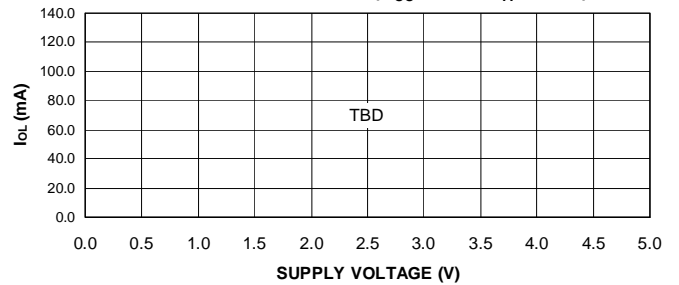


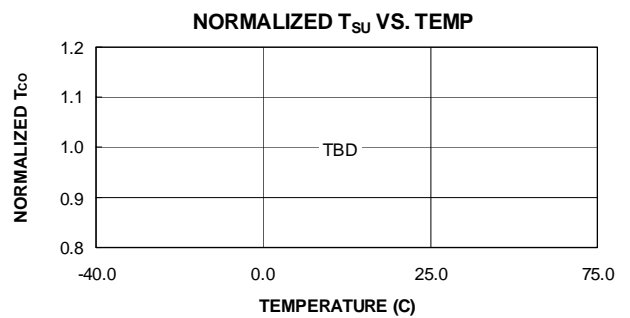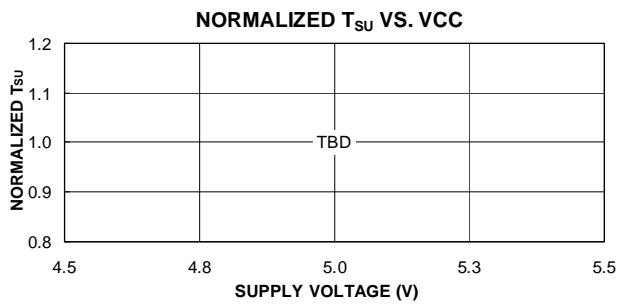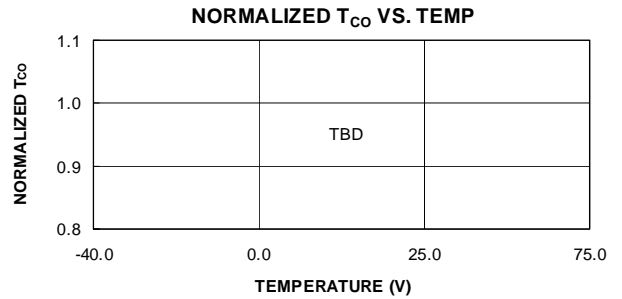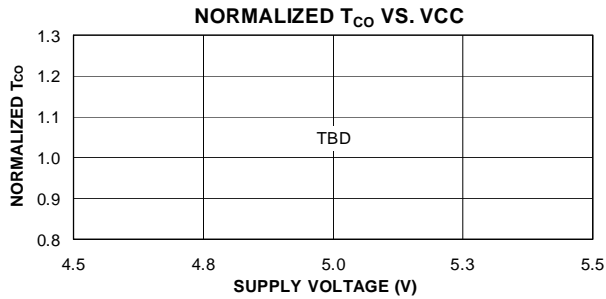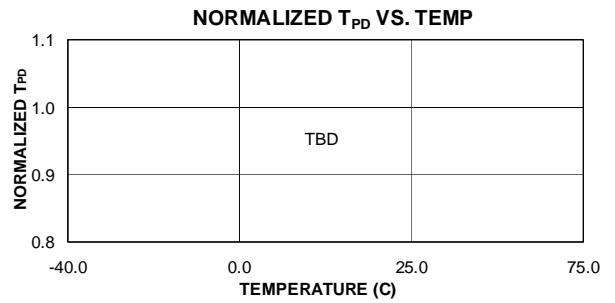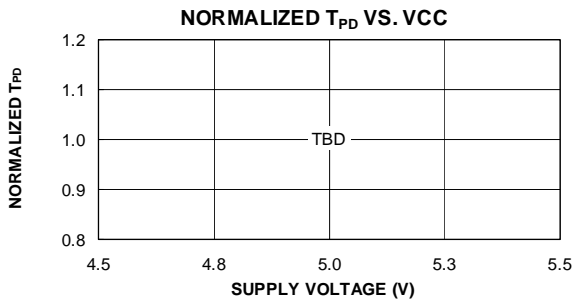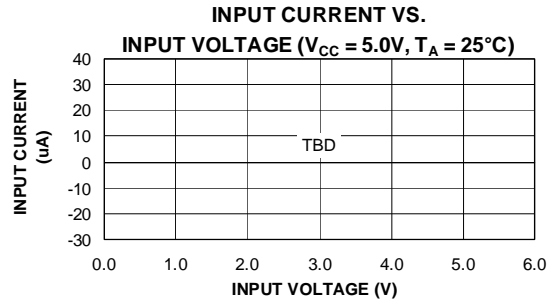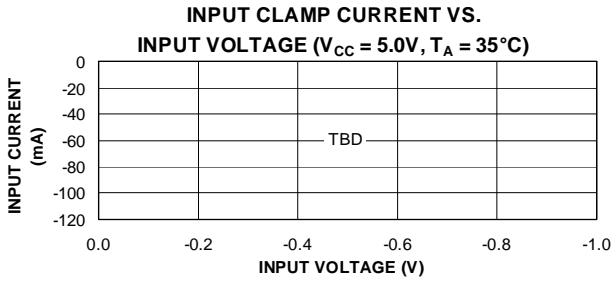

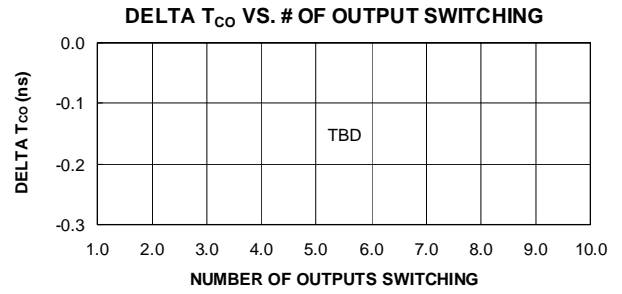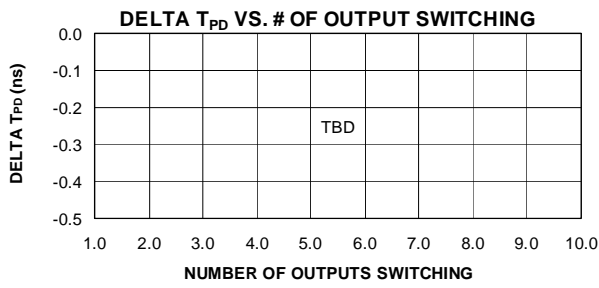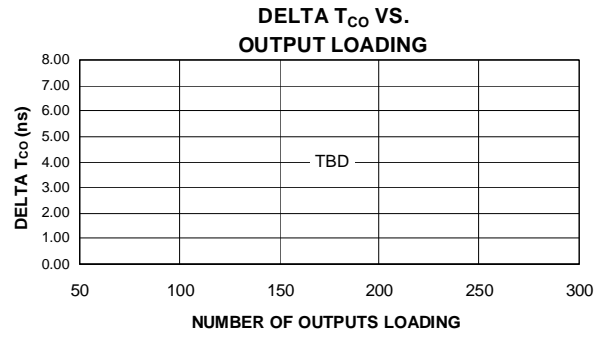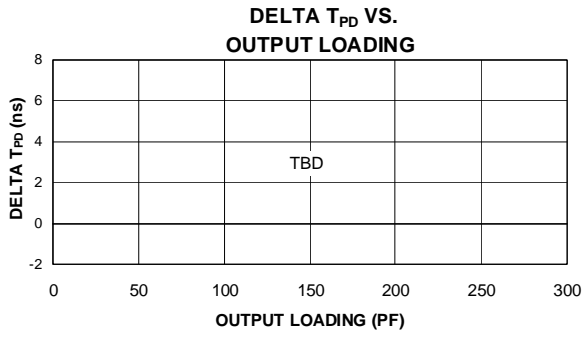


ATF1504AE(L) Pinouts


44-lead PLCC – Top View

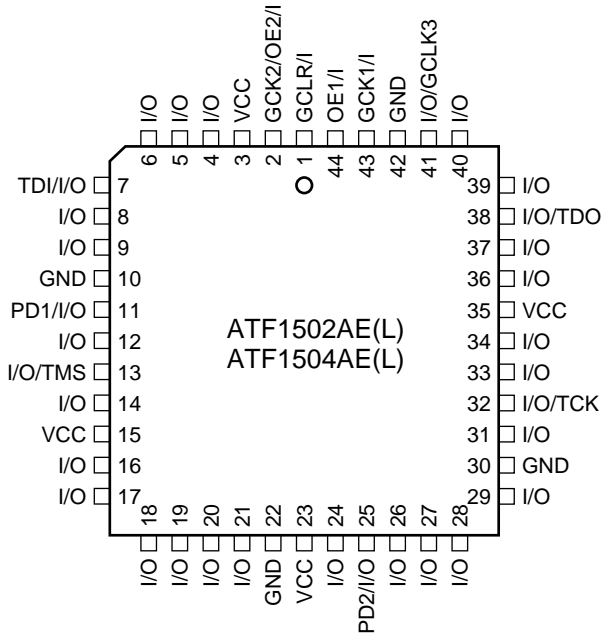


44-lead TQFP – Top View

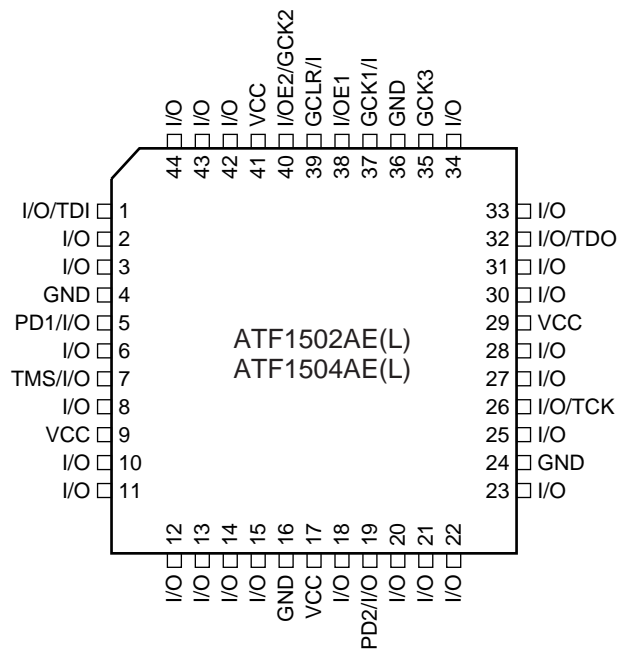


100-lead TQFP

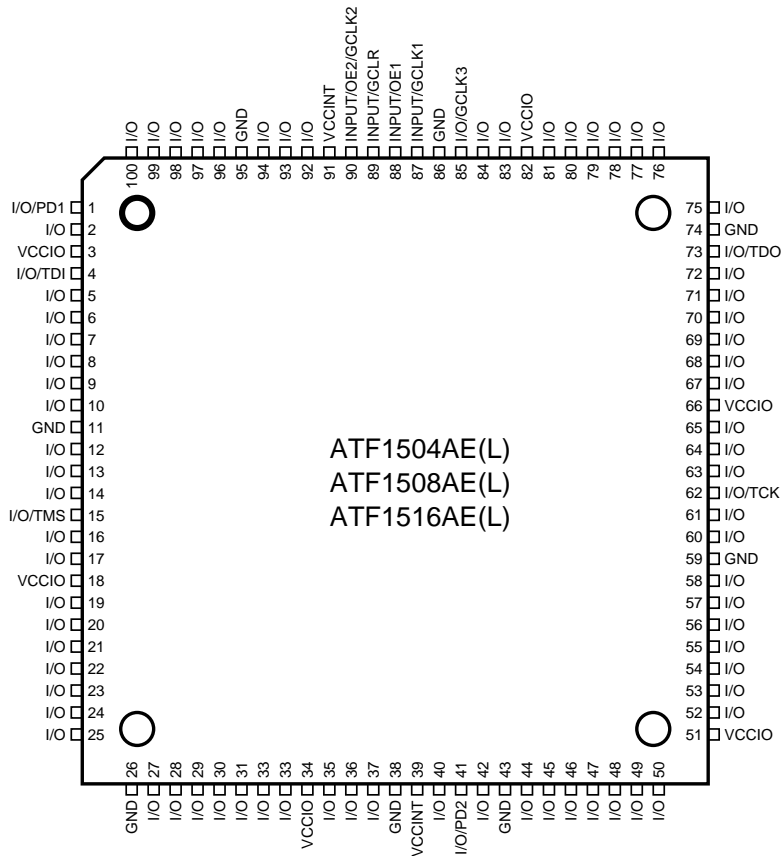

ATF1504AE(L)
49-ball 0.8 mm Pitch
Bottom View

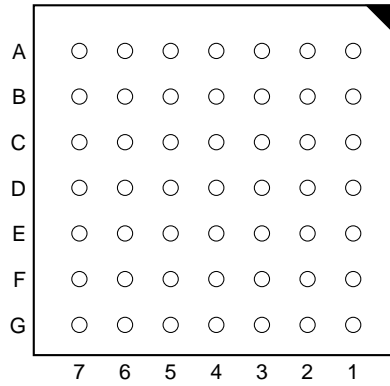

ATF1504AE(L)
ATF1508AE(L)
ATF1516AE(L)
100-ball 1.0 mm Pitch
Bottom View

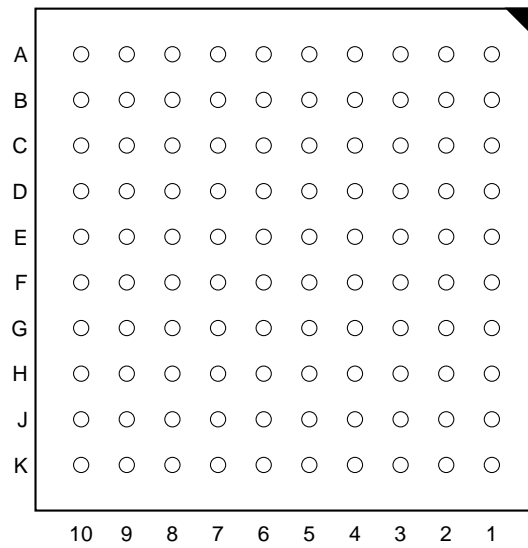

ATF1504AE(L) Dedicated Pinouts

| Dedicated Pin | 44-lead TQFP | 44-lead J-lead | 49-ball BGA | 100-ball BGA | 100-lead TQFP |
|------------------|-----------------|-------------------|----------------|---|---|
| INPUT/OE2/GCLK2 | 40 | 2 | B4 | A5 | 90 |
| INPUT/GCLR | 39 | 1 | A3 | B5 | 89 |
| INPUT/OE1 | 38 | 44 | A4 | B6 | 88 |
| INPUT/GCLK1 | 37 | 43 | A5 | A6 | 87 |
| I/O /GCLK3 | 35 | 41 | C4 | C6 | 85 |
| I/O/PD (1,2) | 5, 19 | 11, 25 | D1, G5 | E1, H6 | 12, 42 |
| I/O/TDI (JTAG) | 1 | 7 | B1 | A1 | 4 |
| I/O/TMS (JTAG) | 7 | 13 | F1 | F3 | 15 |
| I/O/TCK (JTAG) | 26 | 32 | F7 | F8 | 62 |
| I/O/TDO (JTAG) | 32 | 38 | B7 | A10 | 73 |
| GNDINT | 16, 36 | 22, 44 | C2, E6 | C3, D6, D7, E5, F6, G4, G5, H8 | 38, 86 |
| GNDIO | 4, 24 | 10, 30 | B5, F4 | – | 11, 26, 43, 59, 74, 95 |
| VCCINT | 17, 41 | 3, 23 | B3, E4 | D5, G6 | 39, 91 |
| VCCIO | 9, 29 | 15, 35 | C6, E2 | C8, D4, E6, F5, G7, H3 | 3, 18, 34, 51, 66, 82 |
| N/C | - | - | - | B1, B10, C1, C9, C10, D8, E3, E4, H1, H9, H10, J1, J2, J10, K1, K9 | 1, 2, 5, 7, 22, 24, 27, 28, 49, 50, 53, 55, 70, 72, 77, 78 |
| # of Signal Pins | 36 | 36 | 41 | 68 | 68 |
| # User I/O Pins | 32 | 32 | 37 | 64 | 64 |

OE (1, 2) Global OE pins

GCLR Global Clear pin

GCLK (1, 2, 3) Global Clock pins

PD (1, 2) Power-down pins

TDI, TMS, TCK, TDO JTAG pins used for boundary-scan testing or in-system programming

GNDINT Ground pins for the internal device logic

GNDIO Ground pins for the I/O pins

VCCINT VCC pins for the internal device logic

VCCIO VCC for the I/O drivers

ATF1504AE(L) I/O Pinouts

| MC | PLC | 44-lead PLCC | 44-lead TQFP | 49-ball BGA | 84-lead PLCC | 100- ball BGA | 100- lead TQFP | MC | PLC | 44-lead PLCC | 44-lead TQFP | 49-ball BGA | 84-lead PLCC | 100- ball BGA | 100- lead TQFP |
|------------|-----------|-----------------|-----------------|----------------|-----------------|---------------------|----------------------|------------|-------------|-----------------|-----------------|----------------|-----------------|---------------------|----------------------|
| 1 | A | 12 | 6 | D2 | 22 | F4 | 14 | 33 | C | 24 | 18 | E5 | 44 | K6 | 40 |
| 2 | A | - | - | - | 21 | E2 | 13 | 34 | C | - | - | - | 45 | J6 | 41 |
| 3 | A/ PD1 | 11 | 5 | D1 | 20 | E1 | 12 | 35 | C/ PD2 | 25 | 19 | G5 | 46 | H6 | 42 |
| 4 | A | 9 | 3 | D4 | 18 | D2 | 10 | 36 | C | 26 | 20 | F5 | 48 | K7 | 44 |
| 5 | A | 8 | 2 | C1 | 17 | D1 | 9 | 37 | C | 27 | 21 | G6 | 49 | J7 | 45 |
| 6 | A | - | - | - | 16 | D3 | 8 | 38 | C | - | - | - | 50 | H7 | 46 |
| 7 | A | - | - | - | 15 | C2 | 6 | 39 | C | - | - | G7 | 51 | J8 | 47 |
| 8/ TDI | A | 7 | 1 | B1 | 14 | A1 | 4 | 40 | C | 28 | 22 | F6 | 52 | K8 | 48 |
| 9 | A | - | - | B2 | 12 | B2 | 100 | 41 | C | 29 | 23 | D5 | 54 | K10 | 52 |
| 10 | A | - | - | - | 11 | A2 | 99 | 42 | C | - | - | - | 55 | J9 | 54 |
| 11 | A | 6 | 44 | A1 | 10 | A3 | 98 | 43 | C | - | - | - | 56 | G9 | 56 |
| 12 | A | - | - | - | 9 | B3 | 97 | 44 | C | - | - | - | 57 | G10 | 57 |
| 13 | A | - | - | - | 8 | A4 | 96 | 45 | C | - | - | - | 58 | G8 | 58 |
| 14 | A | 5 | 43 | A2 | 6 | B4 | 94 | 46 | C | 31 | 25 | E7 | 60 | F9 | 60 |
| 15 | A | - | - | - | 5 | C4 | 93 | 47 | C | - | - | - | 61 | F10 | 61 |
| 16 | A | 4 | 42 | C3 | 4 | C5 | 92 | 48/ TCK | C | 32 | 26 | F7 | 62 | F8 | 62 |
| 17 | B | 21 | 15 | G4 | 41 | K5 | 37 | 49 | D | 33 | 27 | D7 | 63 | F7 | 63 |
| 18 | B | - | - | E3 | 40 | J5 | 36 | 50 | D | - | - | - | 64 | E9 | 64 |
| 19 | B | 20 | 14 | G3 | 39 | H5 | 35 | 51 | D | 34 | 28 | D6 | 65 | E10 | 65 |
| 20 | B | 19 | 13 | F3 | 37 | K4 | 33 | 52 | D | 36 | 30 | C7 | 67 | E8 | 67 |
| 21 | B | 18 | 12 | G2 | 36 | J4 | 32 | 53 | D | 37 | 31 | B6 | 68 | E7 | 68 |
| 22 | B | - | - | G1 | 35 | H4 | 31 | 54 | D | - | - | - | 69 | D9 | 69 |
| 23 | B | - | - | - | 34 | J3 | 30 | 55 | D | - | - | - | 70 | D10 | 71 |
| 24 | B | 17 | 11 | F2 | 33 | K3 | 29 | 56/ TDO | D | 38 | 32 | B7 | 71 | A10 | 73 |
| 25 | B | 16 | 10 | D3 | 31 | K2 | 25 | 57 | D | 39 | 33 | A7 | 73 | B9 | 75 |
| 26 | B | - | - | - | 30 | H2 | 23 | 58 | D | - | - | - | 74 | A9 | 76 |
| 27 | B | - | - | - | 29 | G2 | 21 | 59 | D | - | - | A6 | 75 | A8 | 79 |
| 28 | B | - | - | - | 28 | G1 | 20 | 60 | D | - | - | - | 76 | B8 | 80 |
| 29 | B | - | - | - | 27 | G3 | 19 | 61 | D | - | - | - | 77 | A7 | 81 |
| 30 | B | 14 | 8 | E1 | 25 | F2 | 17 | 62 | D | 40 | 34 | C5 | 79 | B7 | 83 |
| 31 | B | - | - | - | 24 | F1 | 16 | 63 | D | - | - | - | 80 | C7 | 84 |
| 32/ TMS | B | 13 | 7 | F1 | 23 | F3 | 15 | 64 | D/ GCLK3 | 41 | 35 | C4 | 81 | C6 | 85 |



ATF1504AE(L) Ordering Information

| t_{PD} (ns) | t_{CO1} (ns) | f_{MAX} (MHz) | Ordering Code | Package | Operation Range | | |
|------------------|-------------------|--------------------|---------------------|---------|-----------------------------|--------|--------------------------------|
| 4.5 | 3.1 | 225 | ATF1504AE-4 AC44 | 44A | Commercial (0°C to 70°C) | | |
| | | | ATF1504AE-4 JC44 | 44J | | | |
| | | | ATF1504AE-4 CC49 | 49C1 | | | |
| | | | ATF1504AE-4 AC100 | 100A | | | |
| | | | ATF1504AE-4 CTC100 | 100CT1 | | | |
| 7.5 | 5.1 | 133 | ATF1504AE-7 AC44 | 44A | Commercial (0°C to 70°C) | | |
| | | | ATF1504AE-7 JC44 | 44J | | | |
| | | | ATF1504AE-7 CC49 | 49C1 | | | |
| | | | ATF1504AE-7 AC100 | 100A | | | |
| | | | ATF1504AE-7 CTC100 | 100CT1 | | | |
| | | | | | ATF1504AE-7 AI44 | 44A | Industrial (-40°C to +85°C) |
| | | | | | ATF1504AE-7 JI44 | 44J | |
| | | | | | ATF1504AE-7 CI49 | 49C1 | |
| | | | | | ATF1504AE-7 AI100 | 100A | |
| | | | | | ATF1504AE-7 CTI100 | 100CT1 | |
| 10.0 | 7.0 | 100 | ATF1504AE-10 AC44 | 44A | Commercial (0°C to 70°C) | | |
| | | | ATF1504AE-10 JC44 | 44J | | | |
| | | | ATF1504AE-10 CC49 | 49C1 | | | |
| | | | ATF1504AE-10 AC100 | 100A | | | |
| | | | ATF1504AE-10 CTC100 | 100CT1 | | | |
| | | | | | ATF1504AE-10 AI44 | 44A | Industrial (-40°C to +85°C) |
| | | | | | ATF1504AE-10 JI44 | 44J | |
| | | | | | ATF1504AE-10 CI49 | 49C1 | |
| | | | | | ATF1504AE-10 AI100 | 100A | |
| | | | | | ATF1504AE-10 CTI100 | 100CT1 | |
| 15.0 | 9.0 | 77 | ATF1504AEL-15 AC44 | 44A | Commercial (0°C to 70°C) | | |
| | | | ATF1504AEL-15 JC44 | 44J | | | |
| | | | ATF1504AEL-15 CC49 | 49C1 | | | |
| | | | ATF1504AEL-15 AC100 | 100A | | | |
| | | | ATF1504AEL-15CTC100 | 100CT1 | | | |

Using “C” Product for Industrial

There is very little risk in using “C” devices for industrial applications because the V_{CC} conditions for 3.3V products are the same for commercial and industrial (there is only 15°C difference at the high end of the temperature range). To use commercial product for industrial temperature ranges, de-rate I_{CC} by 15%.

| Package Type | |
|---------------|--|
| 44A | 44-lead, Thin Plastic Gull Wing Quad Flatpack (TQFP) |
| 44J | 44-lead, Plastic J-leaded Chip Carrier (PLCC) |
| 49C1 | 49-lead, Chip Scale Ball Grid Array (CBGA) 0.8 mm pitch |
| 100A | 100-lead, Very Thin Plastic Gull Wing Quad Flatpack (TQFP) |
| 100CT1 | 100-lead, Tape Ball Grid Array (TBGA) 1.0 mm pitch |

AC Characteristics ATF1508AE(L) ⁽¹⁾


| Symbol | Parameter | AE -5 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|----------------------------------|--|-------|-----|-------|-----|--------|------|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PD1} | Input or Feedback to Non-registered Output | | 5 | | 7.5 | | 10 | 3 | | ns |
| t _{PD2} | I/O Input or Feedback to Non-registered Feedback | | 5 | | 7.5 | | 10 | 3 | | ns |
| t _{SU} | Global Clock Setup Time | 3.3 | | 4.9 | | 6.6 | | 11 | | ns |
| t _H | Global Clock Hold Time | 0 | | 0 | | 0 | | 0 | | ns |
| t _{FSU} | Global Clock Setup Time of Fast Input | 2.5 | | 3 | | 3 | | 3 | | ns |
| t _{FH} | Global Clock Hold of Fast Input | 0 | | 0 | | 0 | | 1 | | MHz |
| t _{COP} | Global Clock to Output Delay | 1 | 3.4 | 1 | 5 | 1 | 6.6 | | 9 | ns |
| t _{CH} | Global Clock High Time | 2 | | 3 | | 4 | | 5 | | ns |
| t _{CL} | Global Clock Low Time | 2 | | 3 | | 4 | | 5 | | ns |
| t _{ASU} | Array Clock Setup Time | 1.8 | | 2.8 | | 3.8 | | 5 | | ns |
| t _{AH} | Array Clock Hold Time | 0.2 | | 0.3 | | 0.3 | | 4 | | ns |
| t _{ACOP} | Array Clock Output Delay | 1 | 4.9 | 1 | 7.1 | 1 | 9.4 | | 15 | ns |
| t _{ACH} | Array Clock High Time | 2 | | 3 | | 4 | | 6 | | ns |
| t _{ACL} | Array Clock Low Time | 2 | | 3 | | 4 | | 6 | | ns |
| t _{CNT} | Minimum Clock Global Period | | 5.2 | | 7.7 | | 10.2 | | 13 | ns |
| f _{CNT} ⁽³⁾ | Maximum Internal Global Clock Frequency | 193 | | 130 | | 100 | | 77 | | MHz |
| t _{ACNT} | Minimum Array Clock Period | | 5.2 | | 7.7 | | 10.2 | | 13 | ns |
| f _{ACNT} ⁽⁴⁾ | Maximum Internal Array Clock Frequency | 193 | | 130 | | 100 | | 77 | | MHz |
| f _{MAX} ⁽⁵⁾ | Maximum Clock Frequency | 200 | | 133 | | 100 | | 77 | | MHz |
| t _{IN} | Input Pad and Buffer Delay | | 0.7 | | 1 | | 1.4 | | 2 | ns |
| t _{IO} | I/O Input Pad and Buffer Delay | | 0.7 | | 1 | | 1.4 | | 2 | ns |
| t _{FIN} | Fast Input Delay | | 2.5 | | 3 | | 3.4 | | 2 | ns |
| t _{SEXP} | Foldback Term Delay | | 2 | | 2.9 | | 3.8 | | 8 | ns |
| t _{PEXP} | Cascade Logic Delay | | 0.4 | | 0.7 | | 0.9 | | 1 | ns |
| t _{LAD} | Logic Array Delay | | 1.6 | | 2.4 | | 3.1 | | 6 | ns |
| t _{LAC} | Logic Control Delay | | 0.7 | | 1 | | 1.3 | | 3.5 | ns |
| t _{IOE} | Internal Output Enable Delay | | 0 | | 0 | | 0 | | 3 | ns |
| t _{OD1} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 0.8 | | 1.2 | | 1.6 | | 3 | ns |
| t _{OD2} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 1.3 | | 1.7 | | 2.1 | | 3 | ns |
| t _{OD3} | Output Buffer and Pad Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 5.8 | | 6.2 | | 6.6 | | 5 | ns |
| t _{ZX1} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 4 | | 4 | | 5 | | 7 | ns |

AC Characteristics ATF1508AE(L) (Continued)⁽¹⁾


| Symbol | Parameter | AE -5 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|---------------------------------|---|-------|-----|-------|-----|--------|-----|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{ZX2} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 4.5 | | 4.5 | | 5.5 | | 7 | ns |
| t _{ZX3} | Output Buffer Enable Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 9 | | 9 | | 10 | | 10 | ns |
| t _{XZ} | Output Buffer Disable Delay (C _L = 5pF) | | 4 | | 4 | | 5 | | 6 | ns |
| t _{SU} | Register Setup Time | 1.4 | | 2.1 | | 2.9 | | 5 | | ns |
| t _H | Register Hold Time | 0.6 | | 1 | | 1.3 | | 4 | | ns |
| t _{FSU} | Register Setup Time of Fast Input | 1.1 | | 1.6 | | 1.6 | | 2 | | ns |
| t _{FH} | Register Hold Time of Fast Input | 1.4 | | 1.4 | | 1.4 | | 2 | | ns |
| t _{RD} | Register Delay | | 0.8 | | 1.2 | | 1.6 | | 2 | ns |
| t _{COMB} | Combinatorial Delay | | 0.5 | | 0.9 | | 1.3 | | 2 | ns |
| t _{IC} | Array Clock Delay | | 1.2 | | 1.7 | | 2.2 | | 6 | ns |
| t _{EN} | Register Enable Time | | 0.7 | | 1 | | 1.3 | | 6 | ns |
| t _{GLOB} | Global Control Delay | | 1.1 | | 1.6 | | 2 | | 2 | ns |
| t _{PRE} | Register Preset Time | | 1.4 | | 2 | | 2.7 | | 4 | ns |
| t _{CLR} | Register Clear Time | | 1.4 | | 2 | | 2.7 | | 4 | ns |
| t _{UIM} | Switch Matrix Delay | | 1.4 | | 2 | | 2.6 | | 2 | ns |
| t _{RPA} ⁽²⁾ | Reduced Power Adder | | 4.0 | | 4.0 | | 5 | | 10 | ns |

- Notes:
1. See ordering Information for valid part numbers.
 2. The t_{RPA} parameter must be added to the t_{LAD}, t_{LAC}, t_{IC}, t_{ACL} and t_{SEXP} parameters for macrocells running in the reduced-power mode.
 3. f_{CNT} is the fastest 16-bit counter frequency available, using the local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells). f_{CNT} is also the Export Control Maximum flip-flop toggle rate, f_{TOG}.
 4. f_{ACNT} is the fastest 16-bit counter frequency available, using the internal array clock, local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells).
 5. f_{MAX} is the fastest available frequency for pipeline data.
 6. For clocked applications and frequencies above f_{critical}, OR, non-clocked applications with dormant times less than 1/f_{critical}, the device will achieve the speeds of the -10 column. (See "ITD/automatic power down.")


**STAND-BY I_{CC} VS.
SUPPLY VOLTAGE ($T_A = 25^\circ\text{C}$)**

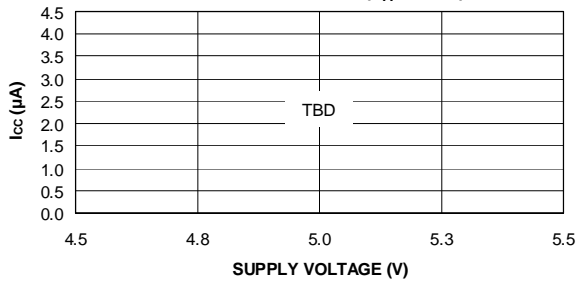


NORMALIZED I_{CC} VS. TEMP

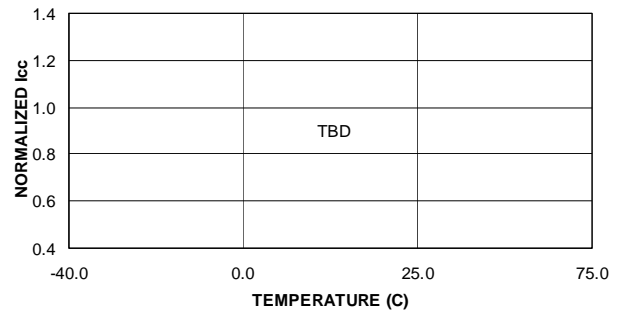


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

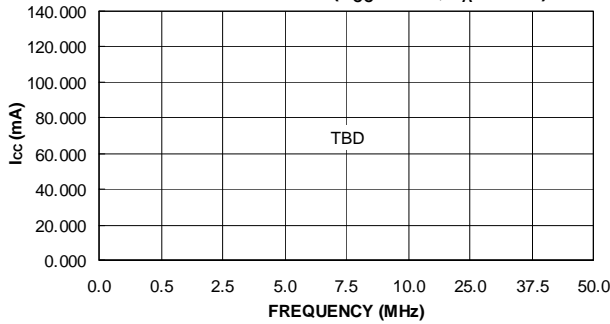


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

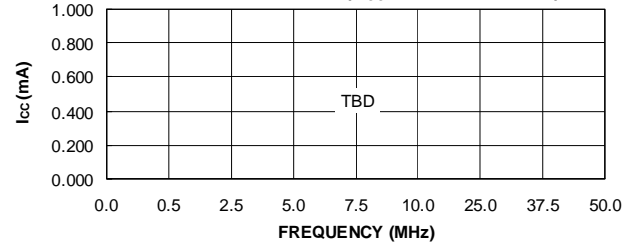


**OUTPUT SOURCE CURRENT VS.
SUPPLY VOLTAGE ($V_{OH} = 2.4\text{V}$)**

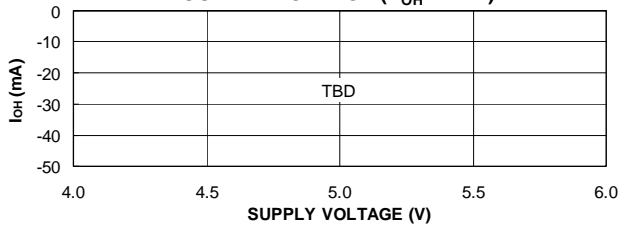


**OUTPUT SOURCE CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**








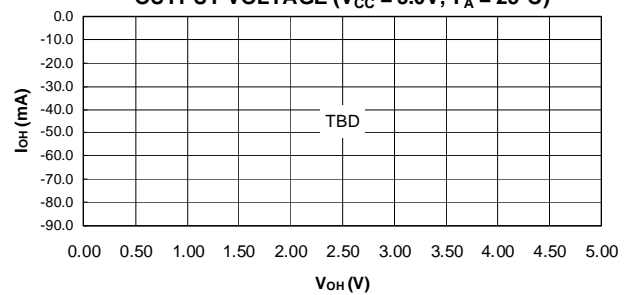






**OUTPUT SINK CURRENT VS.
SUPPLY VOLTAGE ($V_{OL} = 0.5\text{V}$)**

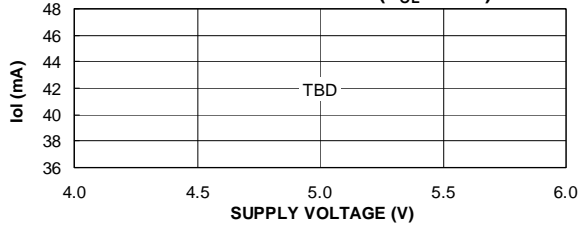

**OUTPUT SINK CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

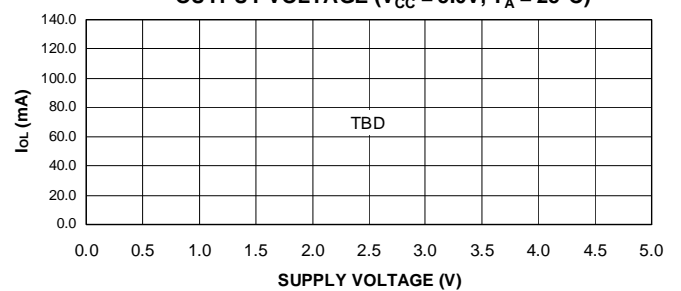


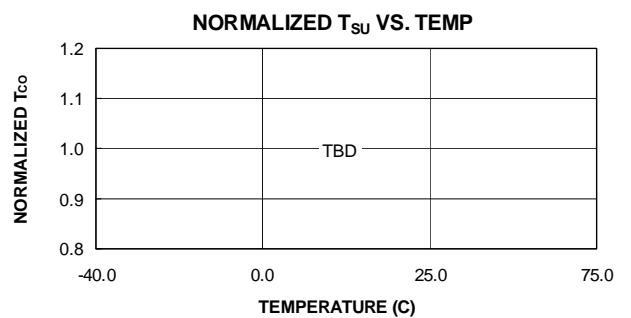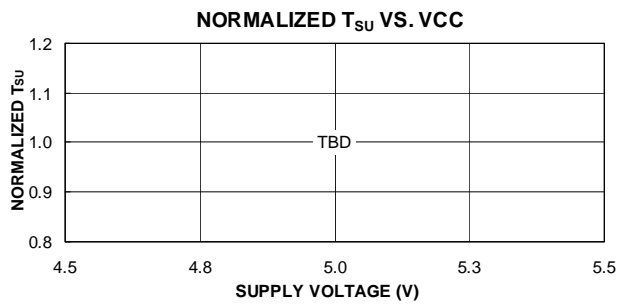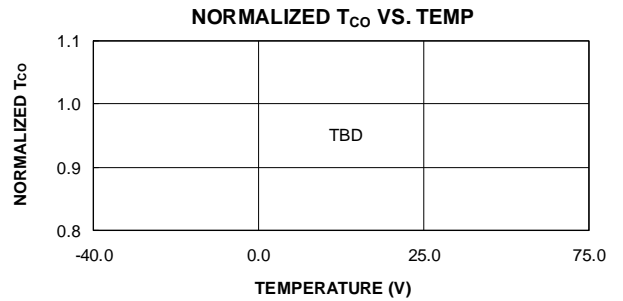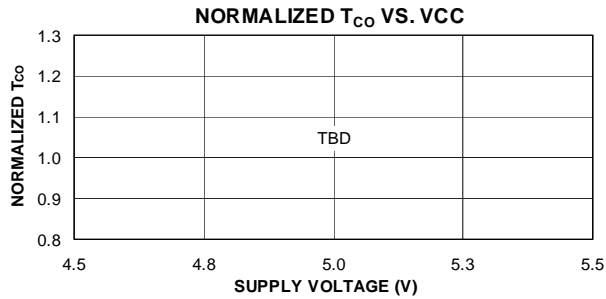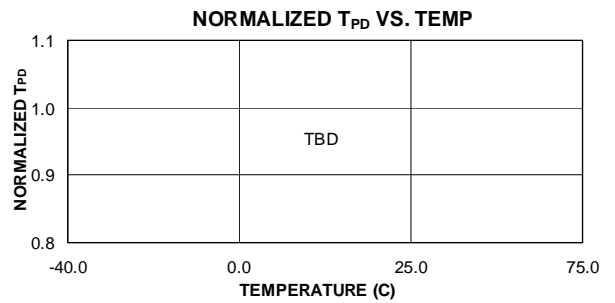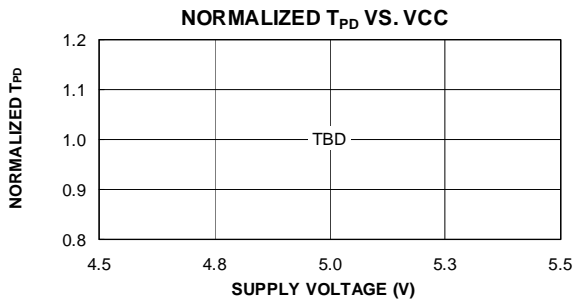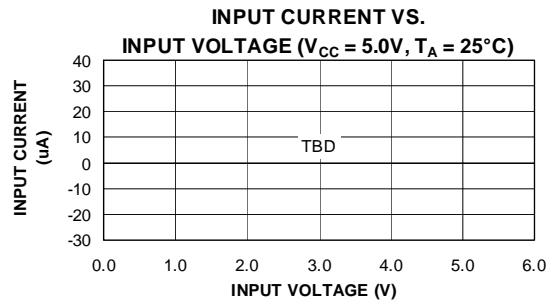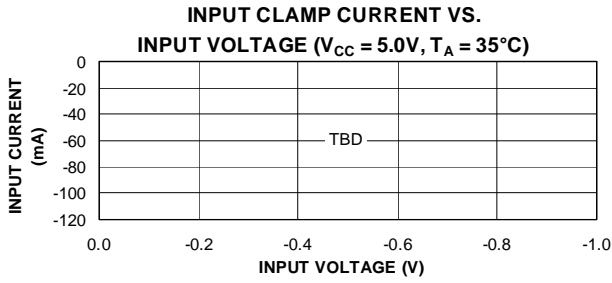

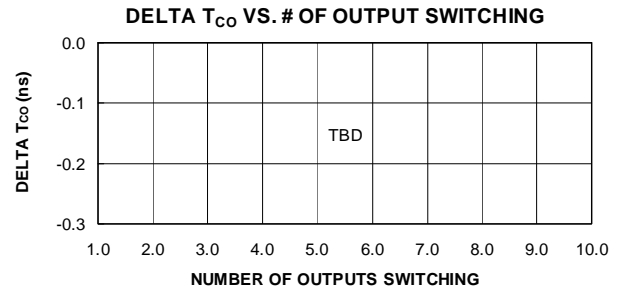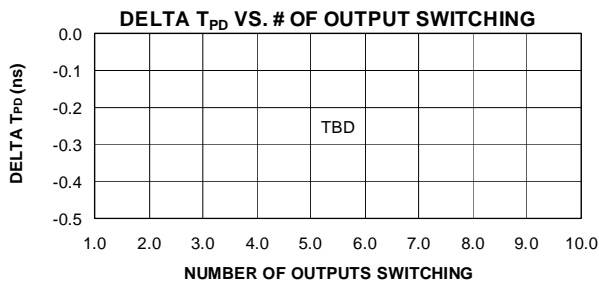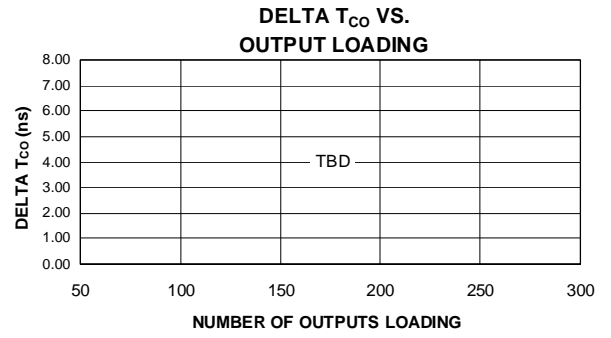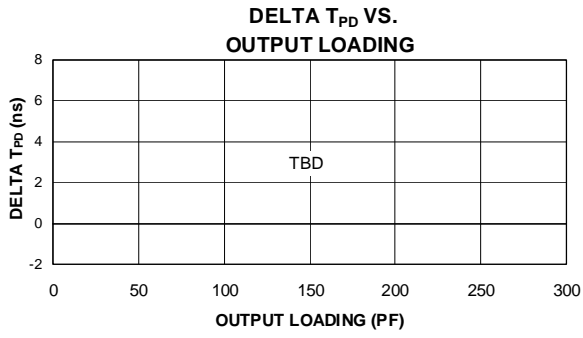


ATF1508AE(L) Pinouts


84-lead PLCC – Top View

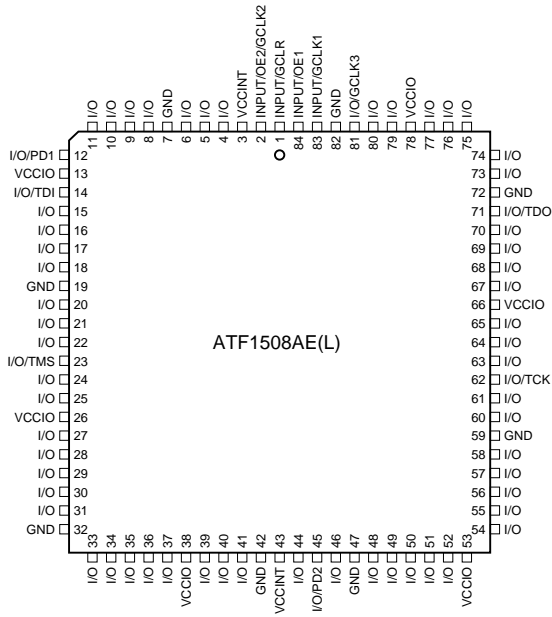


100-lead TQFP – Top View

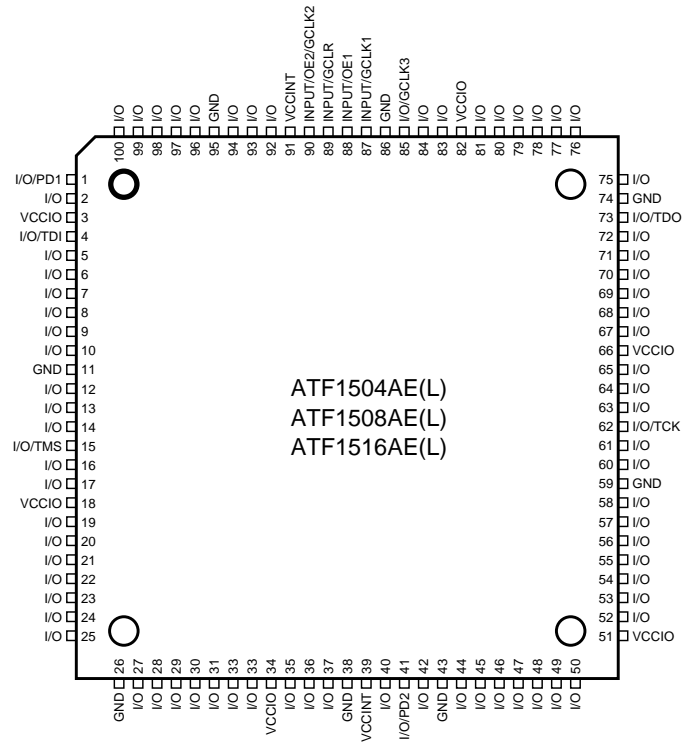


144-lead LQFP – Top View

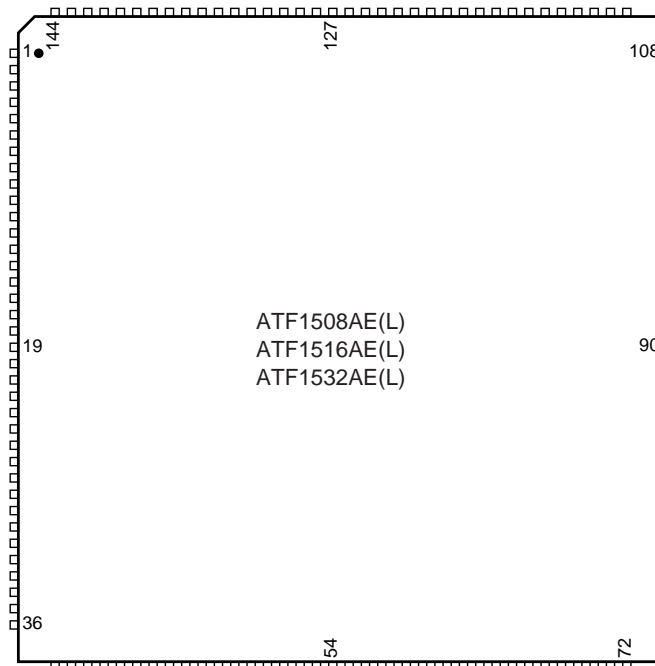

ATF1504AE(L)
ATF1508AE(L)
ATF1516AE(L)
100-ball 1.0 mm Pitch
Bottom View

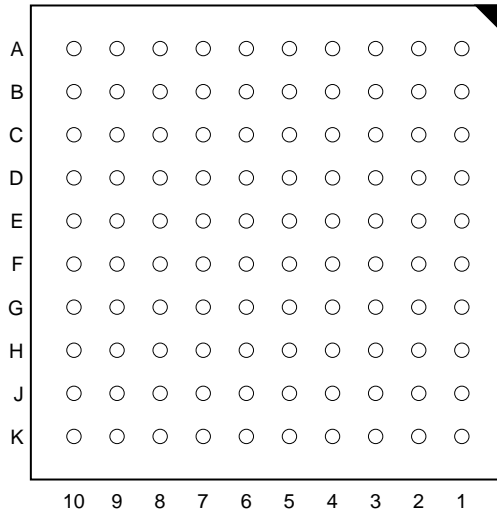


ATF1508AE(L)
169-ball 0.8 mm Pitch
Bottom View

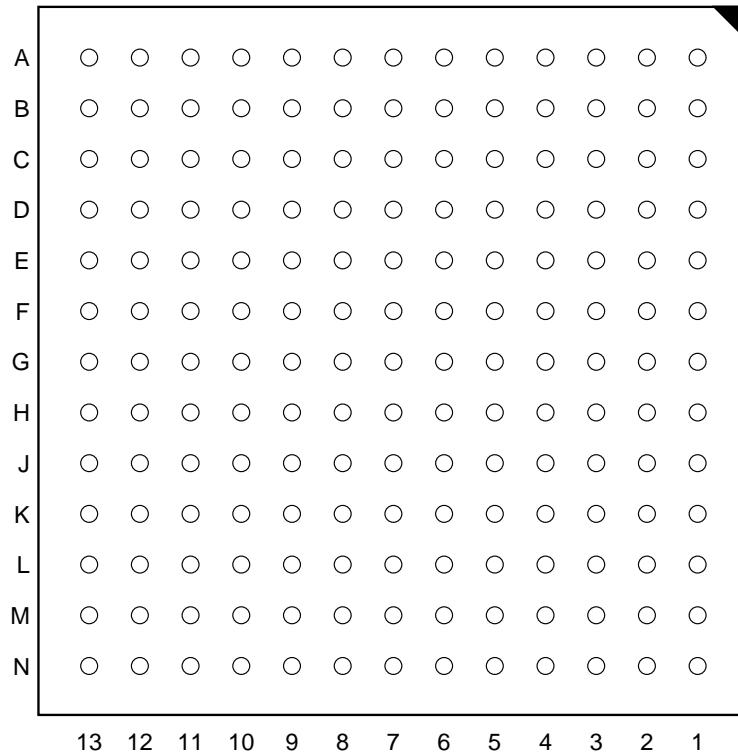



ATF1508AE(L)
ATF1516AE(L)
ATF1532AE(L)
256-ball 1.0 mm Pitch
Bottom View

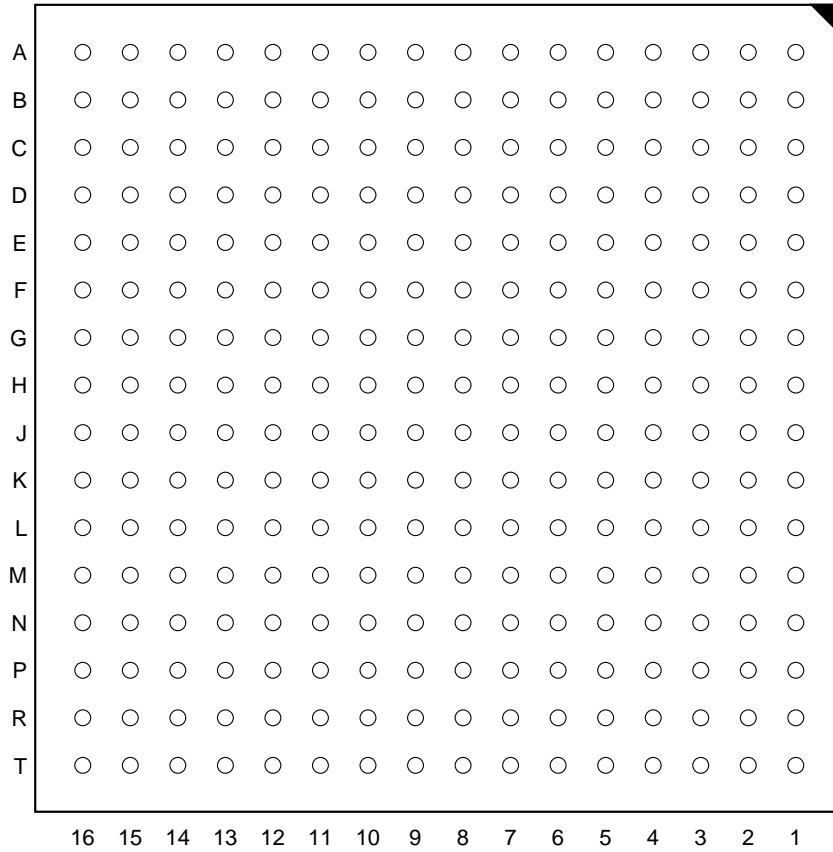

ATF1508AE(L) Dedicated Pinouts

| Dedicated Pin | 84-pin J-Lead | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 169-ball BGA | 256-ball BGA |
|--------------------|------------------------------|------------------------------|------------------------------|--|--|---|
| INPUT/GCLK1 | 83 | 87 | A6 | 125 | D8 | D9 |
| INPUT/GCLR | 1 | 89 | B5 | 127 | D6 | E8 |
| INPUT/OE1 | 84 | 88 | B6 | 126 | D7 | E9 |
| INPUT/OE2/GCK2 | 2 | 90 | A5 | 128 | E7 | D8 |
| I/O/GCLK3 | 81 | 85 | C6 | 119 | A8 | F9 |
| I/O PD (1,2) | 12, 45 | 1,41 | B1, J6 | 142, 61 | D4, H8 | E4, M9 |
| TDI (JTAG) | 14 | 4 | A1 | 4 | E4 | D4 |
| TMS (JTAG) | 23 | 15 | F3 | 20 | J4 | J6 |
| TCK (JTAG) | 62 | 62 | F8 | 89 | J10 | J11 |
| TDO (JTAG) | 71 | 73 | A10 | 104 | E10 | D13 |
| GNDINT | 42, 82 | 38,86 | D6, G5 | 52, 57, 124, 129 | A7, E8, J7, N7 | A8, C9, G9, K8, P9 |
| GNDIO | 7, 19, 32, 47, 59, 72 | 11, 26, 43, 59, 74, 95 | C3, D7, E5, F6, G4, H8 | 3, 13, 17, 33, 59, 64, 85, 105, 135 | A3, A12, E1, F5, F13, H1, H9, J13, N2, N11 | A3, B10, C2, D14, F6, G10, H8, J9, K7, L11, M3, P6, P10, R2, R3, T1, T15 |
| VCCINT | 3, 43 | 39, 91 | D5, G6 | 51, 58, 123, 130 | B7, E6, H7, M7 | B9, C8, G8, K9, P8 |
| VCCIO | 13, 26, 38, 53, 66, 78 | 3, 18, 34, 51, 66, 82 | C8, D4, E6, F5, G7, H3 | 24, 50, 73, 76, 95, 115, 144 | A2, A11, E13, F1, F9, H5, H13, J1, N3, N12 | B3, B5, C14, E15, F11, G3, G7, G15, H9, J8, K10, L3, L6, M15, P14, T2, T3 |
| No Connect | - | - | - | 1, 2, 12, 19, 34, 35, 36, 43, 46, 47, 48, 49, 66, 75, 90, 103, 108, 120, 121, 122 | B5, B6, B8, B9, C5, C6, C7, C8, C9, C10, E2, E3, E11, E12, F2, F3, F11, F12, G1, G3, G11, G12, H2, H3, H11, H12, J2, J3, J11, J12, L4, L5, L6, L7, L8, L9, M5, M6, M8, M9 | A1, A2, A4, A5, A6, A7, A9, A10, A11, A12, A13, A14, A15, A16, B1, B2, B4, B6, B7, B8, B11, B12, B13, B14, B15, B16, C1, C3, C4, C6, C11, C13, C15, C16, D1, D2, D3, D15, D16, E1, E2, E3, E14, E16, F1, F2, F15, F16, G1, G2, G14, G16, H1, H2, H15, H16, J1, J2, J15, J16, K1, K2, K3, K14, K15, K16, L1, L2, L15, L16, M1, M14, M16, N1, N2, N3, N14, N15, N16, P1, P2, P3, P4, P12, P13, P15, P16, R1, R4, R5, R6, R7, R8, R9, R11, R12, R13, R14, R15, R16, T4, T5, T6, T8, T9, T10, T11, T12, T13, T14, T16 |
| # of Signal pins | 68 | 84 | 84 | 100 | 100 | 100 |
| # of User I/O pins | 64 | 80 | 80 | 96 | 96 | 96 |

OE (1,2) Global OE pins.

GCLR Global Clear pin.

GCLK (1,2,3) Global Clock pins.

TDI, TMS, TCK, TDO JTAG pins used for In System Programming or Boundary-scan Testing.

GNDINT Ground pins for the internal device logic.

GNDIO Ground pins for the I/O drivers.

VCCINT VCC pins for the internal device logic.

VCCIO VCC pins for the I/O drivers.



ATF1508AE(L) I/O Pinouts

| MC | PLB | 84-pin J-Lead | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 169-ball BGA | 256-ball BGA | MC | PLB | 84-pin J-Lead | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 169-ball BGA | 256-ball BGA |
|------------|-----|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------|-----|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 1 | A | - | 2 | C1 | 143 | E5 | F4 | 33 | C | - | 25 | K1 | 32 | K4 | N4 |
| 2 | A | - | - | - | - | - | - | 34 | C | - | - | - | - | - | - |
| 3/PD1 | A | 12 | 1 | B1 | 142 | D4 | E4 | 35 | C | 31 | 24 | J1 | 31 | J5 | M4 |
| 4 | A | - | - | - | 141 | B2 | C5 | 36 | C | - | - | - | 30 | N1 | M2 |
| 5 | A | 11 | 100 | B2 | 140 | B3 | E5 | 37 | C | 30 | 23 | H1 | 29 | M1 | L4 |
| 6 | A | 10 | 99 | A2 | 139 | C3 | D5 | 38 | C | 29 | 22 | H2 | 28 | L1 | L5 |
| 7 | A | - | - | - | - | - | - | 39 | C | - | - | - | - | - | - |
| 8 | A | 9 | 98 | A3 | 138 | C4 | D6 | 40 | C | 28 | 21 | G2 | 27 | L2 | K5 |
| 9 | A | - | 97 | B3 | 137 | B4 | E6 | 41 | C | - | 20 | G1 | 26 | K3 | K4 |
| 10 | A | - | - | - | - | - | - | 42 | C | - | - | - | - | - | - |
| 11 | A | 8 | 96 | A4 | 136 | A4 | D7 | 43 | C | 27 | 19 | G3 | 25 | G6 | K6 |
| 12 | A | - | - | - | 134 | D5 | C7 | 44 | C | - | - | - | 23 | K2 | J3 |
| 13 | A | 6 | 94 | B4 | 133 | A5 | E7 | 45 | C | 25 | 17 | F2 | 22 | H4 | J5 |
| 14 | A | 5 | 93 | C4 | 132 | F6 | F7 | 46 | C | 24 | 16 | F1 | 21 | K1 | J4 |
| 15 | A | - | - | - | - | - | - | 47 | C | - | - | - | - | - | - |
| 16 | A | 4 | 92 | C5 | 131 | A6 | F8 | 48/ TMS | C | 23 | 15 | F3 | 20 | J4 | J6 |
| 17 | B | 22 | 14 | F4 | 18 | D1 | J7 | 49 | D | 41 | 37 | K5 | 56 | N6 | N8 |
| 18 | B | - | - | - | - | - | - | 50 | D | - | - | - | - | - | - |
| 19 | B | 21 | 13 | E2 | 16 | G5 | H5 | 51 | D | 40 | 36 | J5 | 55 | K7 | M8 |
| 20 | B | - | - | - | 15 | D2 | H3 | 52 | D | - | - | - | 54 | N5 | P7 |
| 21 | B | 20 | 12 | E1 | 14 | G4 | H4 | 53 | D | 39 | 35 | H5 | 53 | H6 | L8 |
| 22 | B | - | 10 | E3 | 11 | D3 | H6 | 54 | D | - | 33 | K4 | 45 | N4 | N7 |
| 23 | B | - | - | - | - | - | - | 55 | D | - | - | - | - | - | - |
| 24 | B | 18 | 9 | E4 | 10 | C1 | H7 | 56 | D | 37 | 32 | J4 | 44 | K6 | M7 |
| 25 | B | 17 | 8 | D2 | 9 | C2 | G5 | 57 | D | 36 | 31 | H4 | 42 | M4 | L7 |
| 26 | B | - | - | - | - | - | - | 58 | D | - | - | - | - | - | - |
| 27 | B | 16 | 7 | D1 | 8 | G7 | G4 | 59 | D | 35 | 30 | J3 | 41 | J6 | M6 |
| 28 | B | - | - | - | 7 | B1 | F3 | 60 | D | - | - | - | 40 | M3 | P5 |
| 29 | B | 15 | 6 | D3 | 6 | F4 | G6 | 61 | D | 34 | 29 | K3 | 39 | L3 | N6 |
| 30 | B | - | 5 | C2 | 5 | A1 | F5 | 62 | D | - | 28 | J2 | 38 | M2 | M5 |
| 31 | B | - | - | - | - | - | - | 63 | D | - | - | - | - | - | - |
| 32/ TDI | B | 14 | 4 | A1 | 4 | E4 | D4 | 64 | D | 33 | 27 | K2 | 37 | K5 | N5 |

ATF1508AE(L) I/O Pinouts

| MC | PLB | 84-pin J-Lead | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 169-ball BGA | 256-ball BGA | MC | PLB | 84-pin J-Lead | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 169-ball BGA | 256-ball BGA |
|------------|-----|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------------|-----|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 65 | E | 44 | 40 | K6 | 60 | L10 | N9 | 97 | G | 63 | 63 | F7 | 91 | G13 | J10 |
| 66 | E | - | - | - | - | - | - | 98 | G | - | - | - | - | - | - |
| 67/ PD2 | E | 45 | 41 | J6 | 61 | H8 | M9 | 99 | G | 64 | 64 | E9 | 92 | G10 | H12 |
| 68 | E | - | - | - | 62 | N8 | R10 | 100 | G | - | - | - | 93 | D13 | H14 |
| 69 | E | 46 | 42 | H6 | 63 | K8 | L9 | 101 | G | 65 | 65 | E10 | 94 | G9 | H13 |
| 70 | E | - | 44 | K7 | 65 | N9 | N10 | 102 | G | - | 67 | E8 | 96 | D12 | H11 |
| 71 | E | - | - | - | - | - | - | 103 | G | - | - | - | - | - | - |
| 72 | E | 48 | 45 | J7 | 67 | J8 | M10 | 104 | G | 67 | 68 | E7 | 97 | D11 | H10 |
| 73 | E | 49 | 46 | H7 | 68 | M10 | L10 | 105 | G | 68 | 69 | D9 | 98 | C13 | G12 |
| 74 | E | - | - | - | - | - | - | 106 | G | - | - | - | - | - | - |
| 75 | E | 50 | 47 | J8 | 69 | K9 | M11 | 107 | G | 69 | 70 | D10 | 99 | F10 | G13 |
| 76 | E | - | - | - | 70 | N10 | P11 | 108 | G | - | - | - | 100 | C12 | F14 |
| 77 | E | 51 | 48 | K8 | 71 | K10 | N11 | 109 | G | 70 | 71 | D8 | 101 | E9 | G11 |
| 78 | E | - | 49 | K9 | 72 | L11 | N12 | 110 | G | - | 72 | C9 | 102 | B13 | F12 |
| 79 | E | - | - | - | - | - | - | 111 | G | - | - | - | - | - | - |
| 80 | E | 52 | 50 | K10 | 74 | M11 | N13 | 112/ TDO | G | 71 | 73 | A10 | 104 | E10 | D13 |
| 81 | F | - | 52 | J10 | 77 | M12 | M13 | 113 | H | - | 75 | C10 | 106 | A13 | F13 |
| 82 | F | - | - | - | - | - | - | 114 | H | - | - | - | - | - | - |
| 83 | F | 54 | 53 | H10 | 78 | J9 | L13 | 115 | H | 73 | 76 | B10 | 107 | D10 | E13 |
| 84 | F | - | - | - | 79 | N13 | L14 | 116 | H | - | - | - | 109 | B12 | C12 |
| 85 | F | 55 | 54 | H9 | 80 | M13 | L12 | 117 | H | 74 | 77 | B9 | 110 | D9 | E12 |
| 86 | F | 56 | 55 | J9 | 81 | L13 | M12 | 118 | H | 75 | 78 | A9 | 111 | C11 | D12 |
| 87 | F | - | - | - | - | - | - | 119 | H | - | - | - | - | - | - |
| 88 | F | 57 | 56 | G9 | 82 | L12 | K12 | 120 | H | 76 | 79 | A8 | 112 | B11 | D11 |
| 89 | F | - | 57 | G10 | 83 | K13 | K13 | 121 | H | - | 80 | B8 | 113 | B10 | E11 |
| 90 | F | - | - | - | - | - | - | 122 | H | - | - | - | - | - | - |
| 91 | F | 58 | 58 | G8 | 84 | G8 | K11 | 123 | H | 77 | 81 | A7 | 114 | F8 | D10 |
| 92 | F | - | - | - | 86 | K12 | J14 | 124 | H | - | - | - | 116 | A10 | C10 |
| 93 | F | 60 | 60 | F9 | 87 | H10 | J12 | 125 | H | 79 | 83 | B7 | 117 | F7 | E10 |
| 94 | F | 61 | 61 | F10 | 88 | K11 | J13 | 126 | H | 80 | 84 | C7 | 118 | A9 | F10 |
| 95 | F | - | - | - | - | - | - | 127 | H | - | - | - | - | - | - |
| 96/ TCK | F | 62 | 62 | F8 | 89 | J10 | J11 | 128/ GCLK3 | H | 81 | 85 | C6 | 119 | A8 | F9 |

ATF1508AE(L) Ordering Information

| t_{PD} (ns) | t_{CO1} (ns) | f_{MAX} (MHz) | Ordering Code | Package | Operation Range | | |
|------------------|-------------------|--------------------|----------------------|---------|-----------------------------|--------|--------------------------------|
| 5.0 | 3.4 | 200 | ATF1508AE-5 JC84 | 84J | Commercial (0°C to 70°C) | | |
| | | | ATF1508AE-5 AC100 | 100A | | | |
| | | | ATF1508AE-5 CTC100 | 100CT1 | | | |
| | | | ATF1508AE-5 AAC144 | 144AA | | | |
| | | | ATF1508AE-5 CC169 | 169C1 | | | |
| | | | ATF1508AE-5 CTC256 | 256CT1 | | | |
| 7.5 | 5.0 | 133 | ATF1508AE-7 JC84 | 84J | Commercial (0°C to 70°C) | | |
| | | | ATF1508AE-7 AC100 | 100A | | | |
| | | | ATF1508AE-7 CTC100 | 100CT1 | | | |
| | | | ATF1508AE-7 AAC144 | 144AA | | | |
| | | | ATF1508AE-7 CC169 | 169C1 | | | |
| | | | ATF1508AE-7 CTC256 | 256CT1 | | | |
| | | 100 | 6.6 | 100 | ATF1508AE-7 JI84 | 84J | Industrial (-40°C to +85°C) |
| | | | | | ATF1508AE-7 AI100 | 100A | |
| | | | | | ATF1508AE-7 CTI100 | 100CT1 | |
| | | | | | ATF1508AE-7 AAI144 | 144AA | |
| | | | | | ATF1508AE-7 CI169 | 169C1 | |
| | | | | | ATF1508AE-7 CTI256 | 256CT1 | |
| 10.0 | 6.6 | 100 | ATF1508AE-10 JC84 | 84J | Commercial (0°C to 70°C) | | |
| | | | ATF1508AE-10 AC100 | 100A | | | |
| | | | ATF1508AE-10 CTC100 | 100CT1 | | | |
| | | | ATF1508AE-10 AAC144 | 144AA | | | |
| | | | ATF1508AE-15 CC169 | 169C1 | | | |
| | | | ATF1508AE-10 CTC256 | 256CT1 | | | |
| | | 77 | 9.0 | 77 | ATF1508AE-10 JI84 | 84J | Industrial (-40°C to +85°C) |
| | | | | | ATF1508AE-10 AI100 | 100A | |
| | | | | | ATF1508AE-10 CTI100 | 100CT1 | |
| | | | | | ATF1508AE-10 AAI144 | 144AA | |
| | | | | | ATF1508AE-10 CI169 | 169C1 | |
| | | | | | ATF1508AE-10 CTI256 | 256CT1 | |
| 15.0 | 9.0 | 77 | ATF1508AEL-15 JC84 | 84J | Commercial (0°C to 70°C) | | |
| | | | ATF1508AEL-15 AC100 | 100A | | | |
| | | | ATF1508AEL-15 CTC100 | 100CT1 | | | |
| | | | ATF1508AEL-15 AAC144 | 144AA | | | |
| | | | ATF1508AEL-15 CC169 | 169C1 | | | |
| | | | ATF1508AEL-15 CTC256 | 256CT1 | | | |

Using “C” Product for Industrial

There is very little risk in using “C” devices for industrial applications because the V_{CC} conditions for 3.3V products are the same for commercial and industrial (there is only 15°C difference at the high end of the temperature range). To use commercial product for industrial temperature ranges, de-rate I_{CC} by 15%.

| Package Type | |
|---------------|--|
| 84J | 84-lead, Plastic J-leaded Chip Carrier (PLCC) |
| 100A | 100-lead, Very Thin Plastic Gull Wing Quad Flatpack (TQFP) |
| 100CT1 | 100-lead, Tape Ball Grid Array (TBGA) 1.0 mm pitch |
| 144AA | 144-lead, Low Profile Plastic Gull Wing Quad Flatpack (LQFP) |
| 169C1 | 169-lead, Chip Scale Ball Grid Array (CBGA) 0.8 mm pitch |
| 256CT1 | 256-lead, Tape Ball Grid Array (TBGA) 1.0 mm pitch |

AC Characteristics ATF1516AE(L) ⁽¹⁾


| Symbol | Parameter | AE -5 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|----------------------------------|--|-------|-----|-------|-----|--------|------|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PD1} | Input or Feedback to Non-registered Output | | 5.5 | | 7.5 | | 10 | | 15 | ns |
| t _{PD2} | I/O Input or Feedback to Non-registered Feedback | | 5.5 | | 7.5 | | 10 | | 12 | ns |
| t _{SU} | Global Clock Setup Time | 3.9 | | 5.2 | | 6.9 | | 11 | | ns |
| t _H | Global Clock Hold Time | 0 | | 0 | | 0 | | 0 | | ns |
| t _{FSU} | Global Clock Setup Time of Fast Input | 2.5 | | 3 | | 3 | | 3 | | ns |
| t _{FH} | Global Clock Hold of Fast Input | 0 | | 0 | | 0 | | 1 | | MHz |
| t _{COP} | Global Clock to Output Delay | 1 | 3.5 | 1 | 4.8 | 1 | 6.4 | | 9 | ns |
| t _{CH} | Global Clock High Time | 2 | | 3 | | 4 | | 5 | | ns |
| t _{CL} | Global Clock Low Time | 2 | | 3 | | 4 | | 5 | | ns |
| t _{ASU} | Array Clock Setup Time | 2.0 | | 2.7 | | 3.6 | | 5 | | ns |
| t _{AH} | Array Clock Hold Time | 0.2 | | 0.3 | | 0.5 | | 4 | | ns |
| t _{ACOP} | Array Clock Output Delay | 1 | 5.4 | 1 | 7.3 | 1 | 9.7 | | 15 | ns |
| t _{ACH} | Array Clock High Time | 2 | | 3 | | 4 | | 6 | | ns |
| t _{ACL} | Array Clock Low Time | 2 | | 3 | | 4 | | 6 | | ns |
| t _{CNT} | Minimum Clock Global Period | | 5.8 | | 7.9 | | 10.5 | | 13 | ns |
| f _{CNT} ⁽³⁾ | Maximum Internal Global Clock Frequency | 175 | | 125 | | 100 | | 77 | | MHz |
| t _{ACNT} | Minimum Array Clock Period | | 5.8 | | 7.9 | | 10.5 | | 13 | ns |
| f _{ACNT} ⁽⁴⁾ | Maximum Internal Array Clock Frequency | 175 | | 125 | | 100 | | 77 | | MHz |
| f _{MAX} ⁽⁵⁾ | Maximum Clock Frequency | 200 | | 133 | | 100 | | 77 | | MHz |
| t _{IN} | Input Pad and Buffer Delay | | 0.7 | | 0.9 | | 1.2 | | 2 | ns |
| t _{IO} | I/O Input Pad and Buffer Delay | | 0.7 | | 0.9 | | 1.2 | | 2 | ns |
| t _{FIN} | Fast Input Delay | | 2.4 | | 2.9 | | 3.4 | | 2 | ns |
| t _{SEXP} | Foldback Term Delay | | 2.1 | | 2.8 | | 3.7 | | 8 | ns |
| t _{PEXP} | Cascade Logic Delay | | 0.3 | | 0.5 | | 0.6 | | 1 | ns |
| t _{LAD} | Logic Array Delay | | 1.7 | | 2.2 | | 2.8 | | 6 | ns |
| t _{LAC} | Logic Control Delay | | 0.8 | | 1.0 | | 1.3 | | 3.5 | ns |
| t _{IOE} | Internal Output Enable Delay | | 0 | | 0 | | 0 | | 3 | ns |
| t _{OD1} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 0.9 | | 1.2 | | 1.6 | | 3 | ns |
| t _{OD2} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 1.4 | | 1.7 | | 2.1 | | 3 | ns |
| t _{OD3} | Output Buffer and Pad Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 5.9 | | 6.2 | | 6.6 | | 5 | ns |

AC Characteristics ATF1516AE(L) (Continued)⁽¹⁾


| Symbol | Parameter | AE -5 | | AE -7 | | AE -10 | | AEL -15 ⁽⁶⁾ | | Unit |
|-------------------|---|-------|-----|-------|-----|--------|-----|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{ZX1} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 4.0 | | 4.0 | | 5.0 | | 7 | ns |
| t _{ZX2} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 4.5 | | 4.5 | | 5.5 | | 7 | ns |
| t _{ZX3} | Output Buffer Enable Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 9 | | 9 | | 10 | | 10 | ns |
| t _{XZ} | Output Buffer Disable Delay (C _L = 5pF) | | 4 | | 4 | | 5 | | 6 | ns |
| t _{SU} | Register Setup Time | 1.5 | | 2.1 | | 2.9 | | 5 | | ns |
| t _H | Register Hold Time | 0.7 | | 0.9 | | 1.2 | | 4 | | ns |
| t _{FSU} | Register Setup Time of Fast Input | 1.1 | | 1.6 | | 1.6 | | 2 | | ns |
| t _{FH} | Register Hold Time of Fast Input | 1.4 | | 1.4 | | 1.4 | | 2 | | ns |
| t _{RD} | Register Delay | | 0.9 | | 1.2 | | 1.6 | | 2 | ns |
| t _{COMB} | Combinatorial Delay | | 0.5 | | 0.8 | | 1.2 | | 2 | ns |
| t _{IC} | Array Clock Delay | | 1.2 | | 1.6 | | 2.1 | | 6 | ns |
| t _{EN} | Register Enable Time | | 0.8 | | 1.0 | | 1.3 | | 6 | ns |
| t _{GLOB} | Global Control Delay | | 1.0 | | 1.5 | | 2.1 | | 2 | ns |
| t _{PRE} | Register Preset Time | | 1.6 | | 2.3 | | 3.0 | | 4 | ns |
| t _{CLR} | Register Clear Time | | 1.6 | | 2.3 | | 3.0 | | 4 | ns |
| t _{UIM} | Switch Matrix Delay | | 1.7 | | 2.4 | | 3.2 | | 2 | ns |
| t _{RPA} | Reduced Power Adder ⁽²⁾ | | 4.0 | | 4.0 | | 5.0 | | 10 | ns |

- Notes:
1. See ordering information for valid part numbers.
 2. The t_{RPA} parameter must be added to the t_{LAD}, t_{LAC}, t_{IC}, t_{ACL} and t_{SEXP} parameters for macrocells running in the reduced-power mode.
 3. f_{CNT} is the fastest 16-bit counter frequency available, using the local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells). f_{CNT} is also the Export Control Maximum flip-flop toggle rate, f_{TOG}.
 4. f_{ACNT} is the fastest 16-bit counter frequency available, using the internal array clock, local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells).
 5. f_{MAX} is the fastest available frequency for pipeline data.
 6. For clocked applications and frequencies above f_{critical}, OR, non-clocked applications with dormant times less than 1/f_{critical}, the device will achieve the speeds of the -10 column. (See "ITD/automatic power down.")


**STAND-BY I_{CC} VS.
SUPPLY VOLTAGE ($T_A = 25^\circ\text{C}$)**

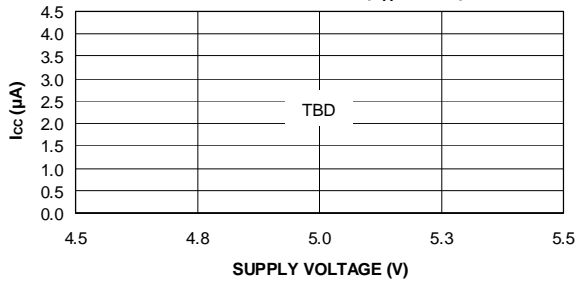


NORMALIZED I_{CC} VS. TEMP

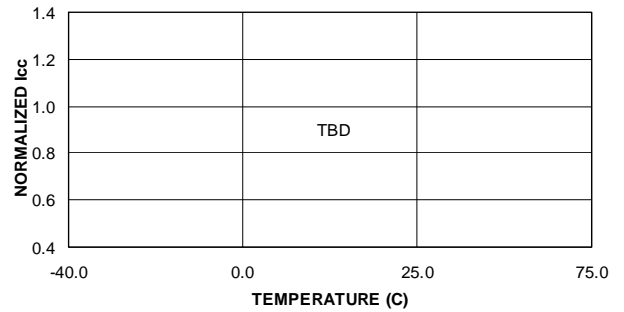


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

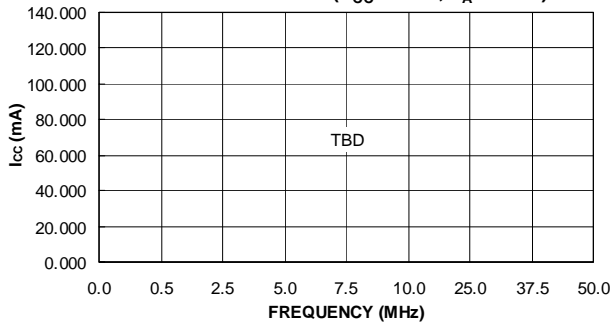


**SUPPLY CURRENT VS.
INPUT FREQUENCY ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

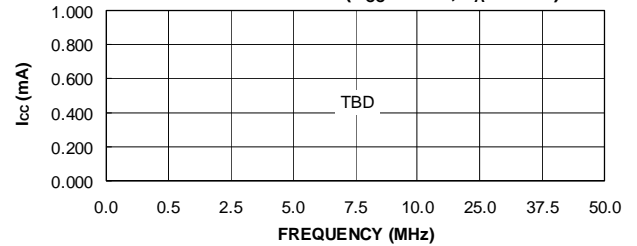


**OUTPUT SOURCE CURRENT VS.
SUPPLY VOLTAGE ($V_{OH} = 2.4\text{V}$)**

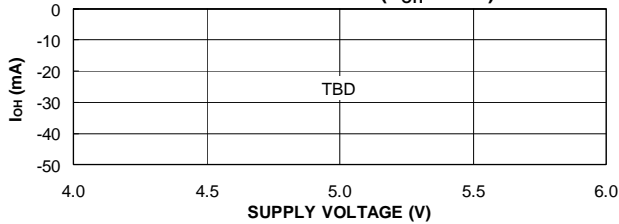


**OUTPUT SOURCE CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**








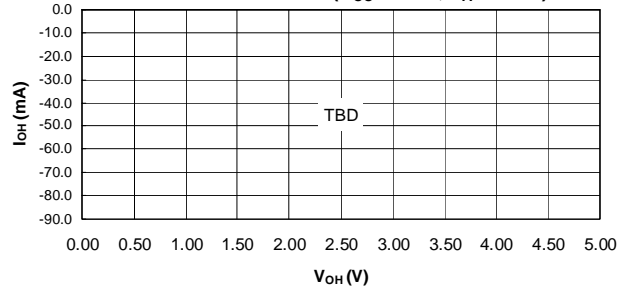






**OUTPUT SINK CURRENT VS.
SUPPLY VOLTAGE ($V_{OL} = 0.5\text{V}$)**

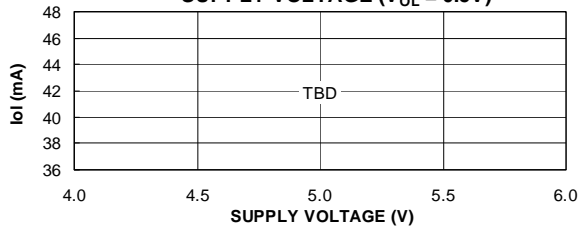

**OUTPUT SINK CURRENT VS.
OUTPUT VOLTAGE ($V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$)**

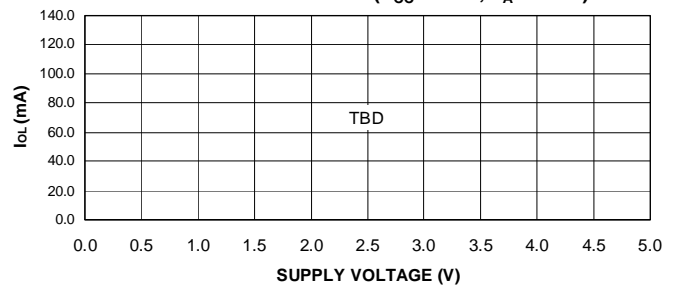


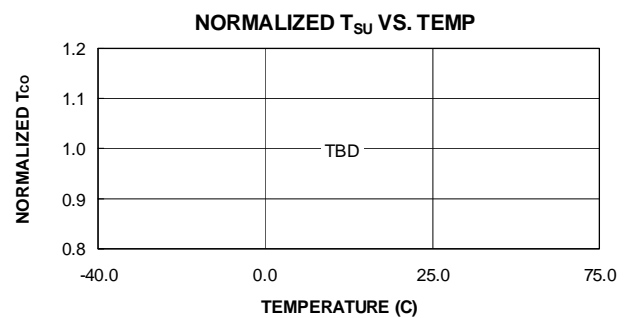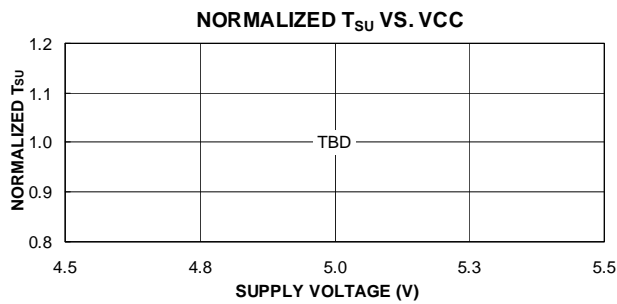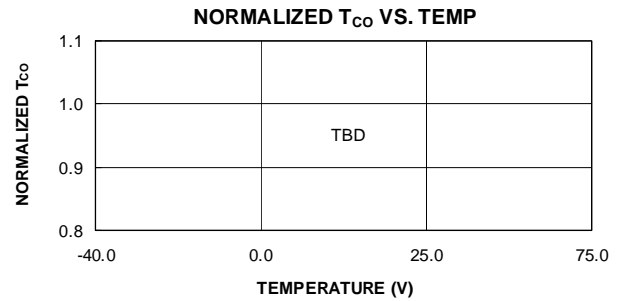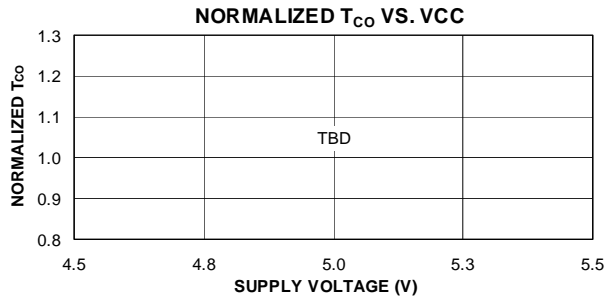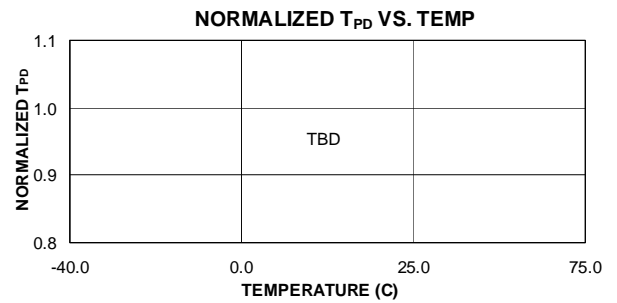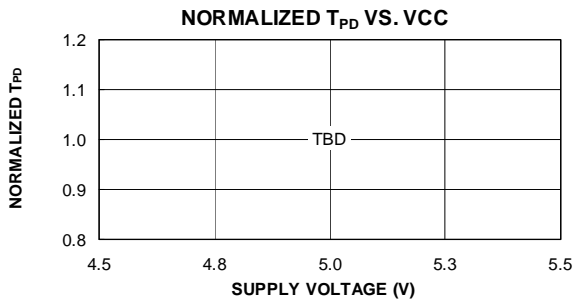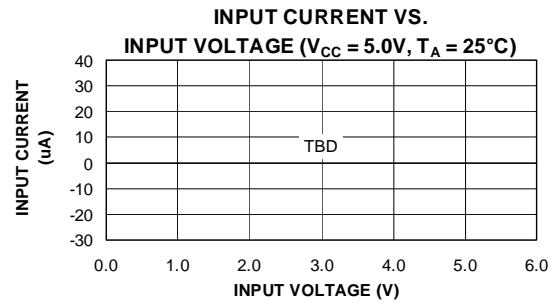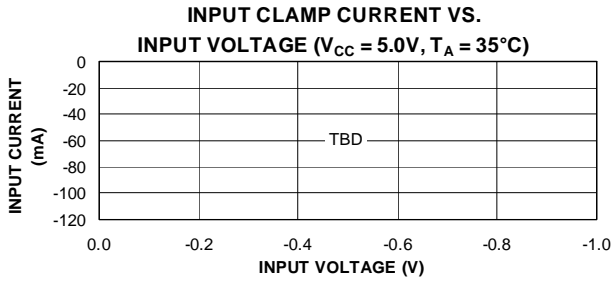

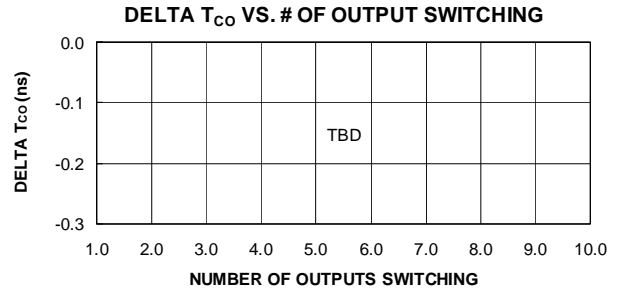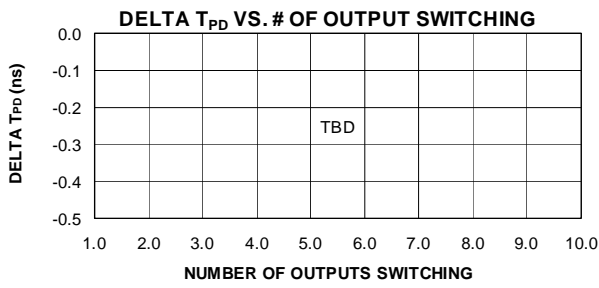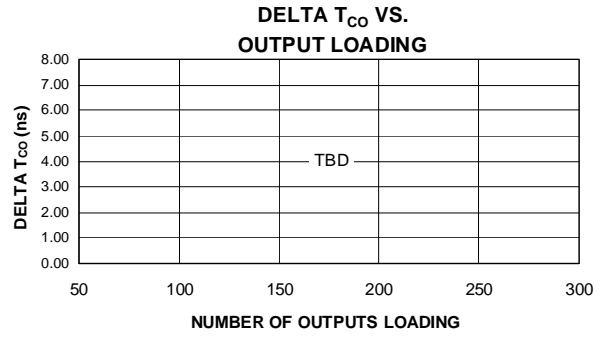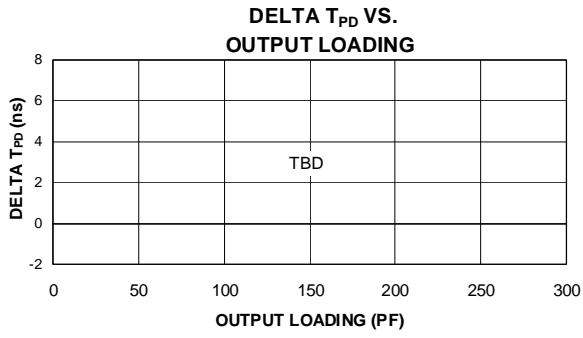


ATF1516AE(L) Pinouts


100-lead TQFP – Top View

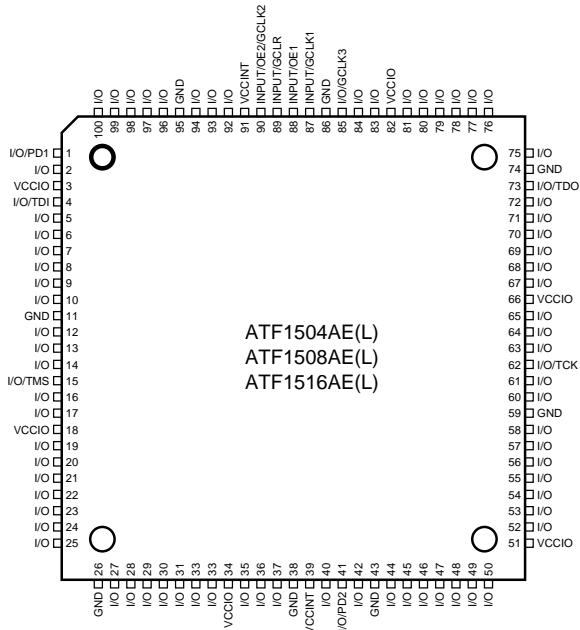

144-lead LQFP – Top View

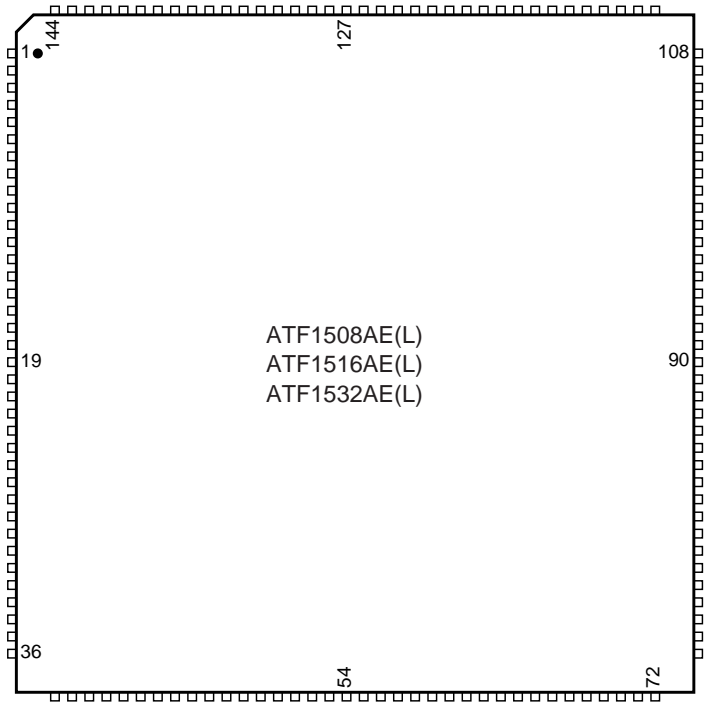


208-lead PQFP – Top View

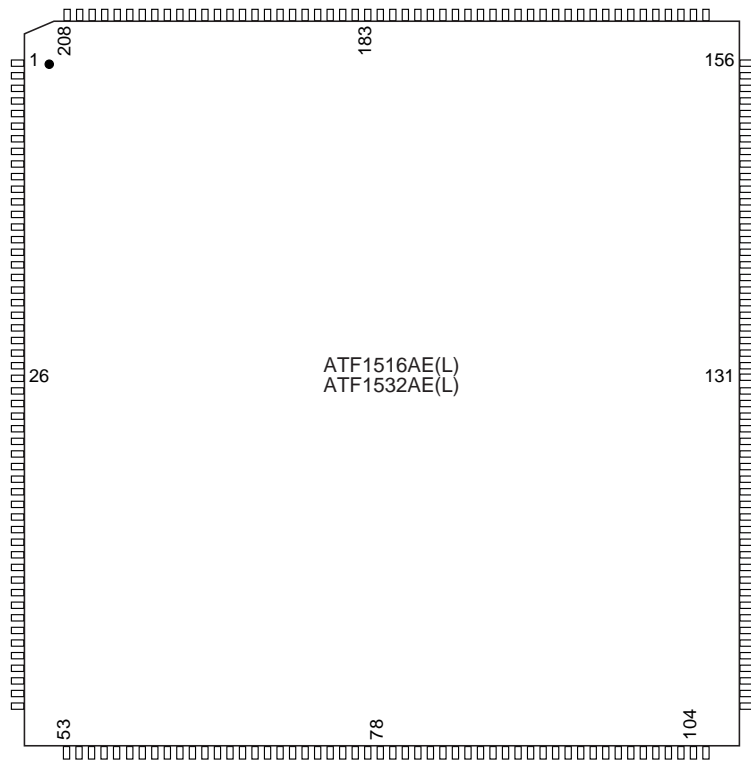


ATF1504AE(L)
ATF1508AE(L)
ATF1516AE(L)

100-ball 1.0 mm Pitch – Bottom View

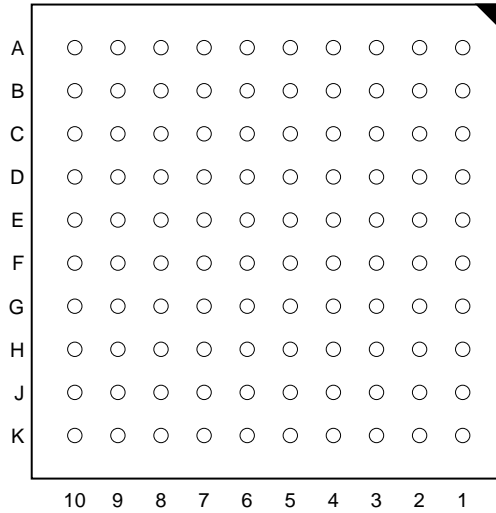

ATF1508AE(L)
ATF1516AE(L)
ATF1532AE(L)

256-ball 1.0 mm Pitch – Bottom View

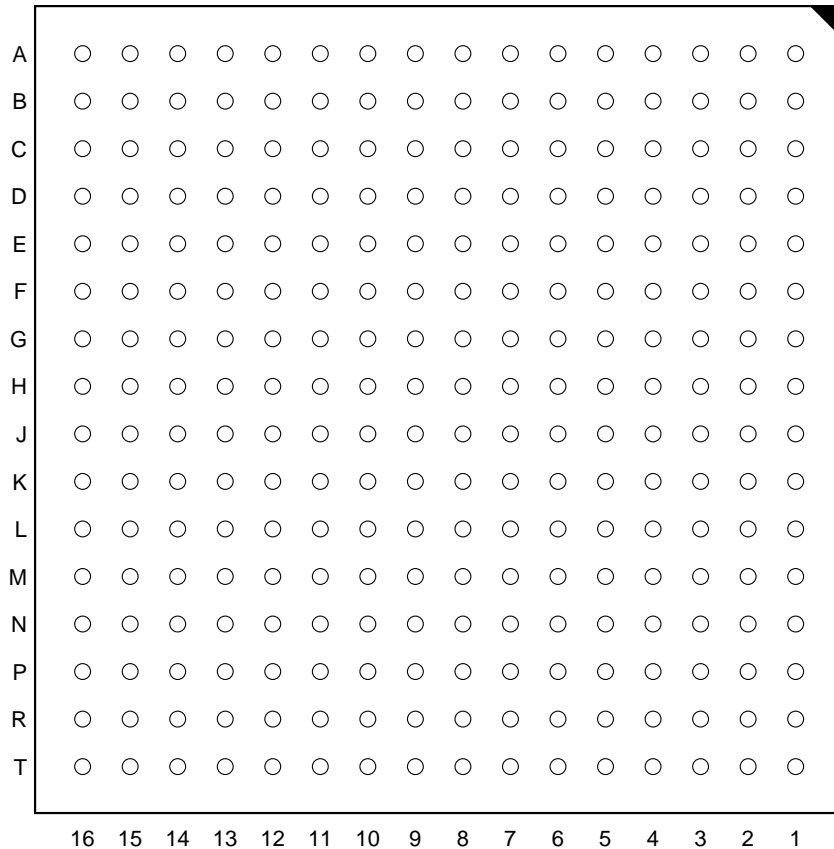



ATF1516AE(L) Dedicated Pinouts

| Dedicated Pin | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|--------------------|------------------------|------------------------|-------------------------------------|---|---|
| INPUT/GCLK1 | 87 | A6 | 125 | 184 | D9 |
| INPUT/GCLR | 89 | B5 | 127 | 182 | E8 |
| INPUT/OE1 | 88 | B6 | 126 | 183 | E9 |
| INPUT/OE2/GCK2 | 90 | A5 | 128 | 181 | D8 |
| I/O/GCLK3 | TBD | TBD | TBD | TBD | TBD |
| I/O PD (1,2) | TBD | TBD | TBD | TBD | TBD |
| TDI (JTAG) | 4 | A1 | 4 | 176 | D4 |
| TMS (JTAG) | 15 | F3 | 20 | 127 | J6 |
| TCK (JTAG) | 62 | F8 | 89 | 30 | J11 |
| TDO (JTAG) | 73 | A10 | 104 | 189 | D13 |
| GNDINT | 38, 86 | D6, G5 | 52, 57, 124, 129 | 75, 82, 180, 185 | A8, C9, G9, K8, P9 |
| GNDIO | 11, 26, 43, 59, 74, 95 | C3, D7, E5, F6, G4, H8 | 3, 13, 17, 33, 59, 64, 85, 105, 135 | 14, 32, 50, 72, 94, 116, 134, 152, 174, 200 | A3, B10, C2, D14, F6, G10, H8, J9, K7, L11, M3, P6, P10, R2, R3, T1, T15 |
| VCCINT | 39, 91 | D5, G6, | 51, 58, 123, 130 | 74, 83, 179, 186 | B9, C8, G8, K9, P8 |
| VCCIO | 3, 18, 34, 51, 66, 82 | C8, D4, E6, F5, G7, H3 | 24, 50, 73, 76, 95, 115, 144 | 5, 23, 41, 63, 85, 107, 125, 143, 165, 191 | B3, B5, C14, E15, F11, G3, G7, G15, H9, J8, K10, L3, L6, M15, P14, T2, T3 |
| No Connect | - | - | - | 1,2, 51, 52, 53, 54, 103, 104, 105, 106, 155, 156, 157, 158, 207, 208 | A1, A2, A6, A12, A13, A14, A15, A16, B1, B2, B15, B16, C1, C15, C16, D1, D3, D15, D16, G1, G16, H15, H16, J1, K1, L1, L2, M1, M16, N1, N16, P1, P2, P15, P16, R1, R14, R15, R16, T7, T8, T10, T11, T14, T16 |
| # of Signal pins | 84 | 84 | 120 | 164 | 164 |
| # of User I/O pins | 80 | 80 | 116 | 160 | 160 |

OE (1,2) Global OE pins.

GCLR Global Clear pin.

GCLK (1,2,3) Global Clock pins.

TDI, TMS, TCK, TDO JTAG pins used for In System Programming or Boundary-scan Testing.

GNDINT Ground pins for the internal device logic.

GNDIO Ground pins for the I/O drivers.

VCCINT VCC pins for the internal device logic.

VCCIO VCC pins for the I/O drivers.

ATF1516AE(L) I/O Pinouts

| MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|----|-----|--------------|--------------|--------------|--------------|--------------|----|-----|--------------|--------------|--------------|--------------|--------------|
| 1 | A | - | C1 | - | 153 | C3 | 33 | C | - | - | 36 | 108 | N4 |
| 2 | A | - | - | - | - | - | 34 | C | - | - | - | - | - |
| 3 | A | - | - | 2 | 154 | C4 | 35 | C | - | - | 35 | 109 | P3 |
| 4 | A | - | - | - | - | - | 36 | C | - | - | - | - | - |
| 5 | A | - | B1 | 1 | 159 | E5 | 37 | C | - | - | 34 | 110 | N3 |
| 6 | A | - | - | 143 | 160 | D5 | 38 | C | - | - | - | 111 | M4 |
| 7 | A | - | - | - | - | - | 39 | C | - | - | - | - | - |
| 8 | A | 2 | - | - | 161 | C5 | 40 | C | 25 | K1 | 32 | 112 | M2 |
| 9 | A | 1 | - | - | 162 | B4 | 41 | C | 24 | J1 | 31 | 113 | L4 |
| 10 | A | - | - | - | - | - | 42 | C | - | - | - | - | - |
| 11 | A | 100 | B2 | 142 | 163 | A4 | 43 | C | 23 | H1 | 30 | 114 | L5 |
| 12 | A | - | - | - | - | - | 44 | C | - | - | - | - | - |
| 13 | A | - | - | 141 | 164 | A5 | 45 | C | 22 | H2 | 29 | 115 | K6 |
| 14 | A | 99 | A2 | 140 | 166 | D6 | 46 | C | - | - | - | 117 | K5 |
| 15 | A | - | - | - | - | - | 47 | C | - | - | - | - | - |
| 16 | A | 98 | A3 | 139 | 167 | C6 | 48 | C | 21 | G2 | 28 | 118 | K4 |
| 17 | B | - | - | - | 141 | F5 | 49 | D | 31 | H4 | 44 | 92 | N6 |
| 18 | B | - | - | - | - | - | 50 | D | - | - | - | - | - |
| 19 | B | - | - | 10 | 142 | F2 | 51 | D | 30 | J3 | 43 | 93 | T5 |
| 20 | B | - | - | - | - | - | 52 | D | - | - | - | - | - |
| 21 | B | - | - | 9 | 144 | E1 | 53 | D | 29 | K3 | 42 | 95 | M6 |
| 22 | B | - | - | - | 145 | F4 | 54 | D | 28 | J2 | 41 | 96 | R5 |
| 23 | B | - | - | - | - | - | 55 | D | - | - | - | - | - |
| 24 | B | 8 | D2 | 8 | 146 | F3 | 56 | D | - | - | 40 | 97 | M5 |
| 25 | B | 7 | D1 | 7 | 147 | E2 | 57 | D | - | - | - | 98 | P5 |
| 26 | B | - | - | - | - | - | 58 | D | - | - | - | - | - |
| 27 | B | 6 | D3 | 6 | 148 | D2 | 59 | D | - | - | 39 | 99 | N5 |
| 28 | B | - | - | - | - | - | 60 | D | - | - | - | - | - |
| 29 | B | 5 | C2 | 5 | 149 | E3 | 61 | D | - | - | 38 | 100 | T4 |
| 30 | B | - | - | - | 150 | E4 | 62 | D | - | - | - | 101 | R4 |
| 31 | B | - | - | - | - | - | 63 | D | - | - | - | - | - |
| 32 | B | 4 | A1 | 4 | 151 | D4 | 64 | D | 27 | K2 | 37 | 102 | P4 |



ATF1516AE(L) I/O Pinouts

| MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|----|-----|-----------------|-----------------|-----------------|-----------------|-----------------|-----|-----|-----------------|-----------------|-----------------|-----------------|-----------------|
| 65 | E | - | - | - | 168 | B6 | 97 | G | - | - | - | 119 | K3 |
| 66 | E | - | - | - | - | - | 98 | G | - | - | - | - | - |
| 67 | E | - | - | - | 169 | E6 | 99 | G | - | - | 27 | 120 | K2 |
| 68 | E | - | - | - | - | - | 100 | G | - | - | - | - | - |
| 69 | E | - | - | 138 | 170 | F7 | 101 | G | - | - | 26 | 121 | J7 |
| 70 | E | - | - | - | 171 | E7 | 102 | G | - | - | - | 122 | H7 |
| 71 | E | - | - | - | - | - | 103 | G | - | - | - | - | - |
| 72 | E | 97 | B3 | 137 | 172 | D7 | 104 | G | 20 | G1 | 25 | 123 | J5 |
| 73 | E | 96 | A4 | 136 | 173 | C7 | 105 | G | 19 | G3 | 23 | 124 | J2 |
| 74 | E | - | - | - | - | - | 106 | G | - | - | - | - | - |
| 75 | E | 94 | B4 | 134 | 175 | B7 | 107 | G | 17 | F2 | 22 | 126 | J3 |
| 76 | E | - | - | - | - | - | 108 | G | - | - | - | - | - |
| 77 | E | 93 | C4 | 133 | 176 | A7 | 109 | G | 16 | F1 | 21 | 127 | J4 |
| 78 | E | - | - | 132 | 177 | F8 | 110 | G | - | - | - | 128 | H6 |
| 79 | E | - | - | - | - | - | 111 | G | - | - | - | - | - |
| 80 | E | 92 | C5 | 131 | 178 | B8 | 112 | G | 15 | F3 | 20 | 129 | J6 |
| 81 | F | - | - | - | 130 | H5 | 113 | H | 37 | K5 | - | 79 | M8 |
| 82 | F | - | - | - | - | - | 114 | H | - | - | - | - | - |
| 83 | F | - | - | 19 | 131 | H1 | 115 | H | 36 | J5 | 54 | 80 | N8 |
| 84 | F | - | - | - | - | - | 116 | H | - | - | - | - | - |
| 85 | F | - | - | 18 | 132 | H2 | 117 | H | - | - | 53 | 81 | L8 |
| 86 | F | - | - | - | 133 | H3 | 118 | H | 35 | H5 | - | 84 | R7 |
| 87 | F | - | - | - | - | - | 119 | H | - | - | - | - | - |
| 88 | F | 14 | F4 | 16 | 135 | H4 | 120 | H | - | - | 49 | 86 | P7 |
| 89 | F | 13 | E2 | 15 | 136 | G6 | 121 | H | - | - | 48 | 87 | N7 |
| 90 | F | - | - | - | - | - | 122 | H | - | - | - | - | - |
| 91 | F | 12 | E1 | 14 | 137 | G5 | 123 | H | - | - | 47 | 88 | M7 |
| 92 | F | - | - | - | - | - | 124 | H | - | - | - | - | - |
| 93 | F | 10 | E3 | 12 | 138 | G2 | 125 | H | 33 | K4 | 46 | 89 | L7 |
| 94 | F | - | - | - | 139 | G4 | 126 | H | - | - | - | 90 | T6 |
| 95 | F | - | - | - | - | - | 127 | H | - | - | - | - | - |
| 96 | F | 9 | E4 | 11 | 140 | F1 | 128 | H | 32 | J4 | 45 | 91 | R6 |



ATF1516AE(L) I/O Pinouts

| MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 100-ball TQFP | 100-pin BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|-----------------|-----------------|-----------------|-----------------|-----------------|-----|-----|------------------|----------------|-----------------|-----------------|-----------------|
| 129 | I | 80 | B8 | 114 | 197 | C11 | 161 | K | - | - | - | 38 | K11 |
| 130 | I | - | - | - | - | - | 162 | K | - | - | - | - | - |
| 131 | I | 81 | A7 | 116 | 196 | B11 | 163 | K | 57 | G10 | 82 | 37 | K12 |
| 132 | I | - | - | - | - | - | 164 | K | - | - | - | - | - |
| 133 | I | - | - | 117 | 195 | A11 | 165 | K | - | - | 83 | 36 | K14 |
| 134 | I | - | - | - | 194 | F10 | 166 | K | - | - | - | 35 | K13 |
| 135 | I | - | - | - | - | - | 167 | K | - | - | - | - | - |
| 136 | I | - | - | 118 | 193 | E10 | 168 | K | 58 | G8 | 84 | 34 | K15 |
| 137 | I | - | - | 119 | 192 | A10 | 169 | K | - | - | 86 | 33 | K16 |
| 138 | I | - | - | - | - | - | 170 | K | - | - | - | - | - |
| 139 | I | 83 | B7 | 120 | 190 | C10 | 171 | K | 60 | F9 | 87 | 31 | J13 |
| 140 | I | - | - | - | - | - | 172 | K | - | - | - | - | - |
| 141 | I | 84 | C7 | 121 | 189 | D10 | 173 | K | 61 | F10 | 88 | 30 | J14 |
| 142 | I | - | - | - | 188 | F9 | 174 | K | - | - | - | 29 | J12 |
| 143 | I | - | - | - | - | - | 175 | K | - | - | - | - | - |
| 144 | I | 85 | C6 | 122 | 187 | A9 | 176 | K | 62 | F8 | 89 | 28 | J11 |
| 145 | J | 63 | F7 | - | 27 | J15 | 177 | L | - | - | - | 78 | R8 |
| 146 | J | - | - | - | - | - | 178 | L | - | - | - | - | - |
| 147 | J | 64 | E9 | 90 | 26 | J16 | 179 | L | - | - | 55 | 77 | T9 |
| 148 | J | - | - | - | - | - | 180 | L | - | - | - | - | - |
| 149 | J | 65 | E10 | 91 | 25 | J10 | 181 | L | - | - | 56 | 76 | R9 |
| 150 | J | - | - | - | 24 | H14 | 182 | L | - | - | - | 73 | N9 |
| 151 | J | - | - | - | - | - | 183 | L | - | - | - | - | - |
| 152 | J | - | - | 92 | 22 | H13 | 184 | L | 40 | K6 | 60 | 71 | M9 |
| 153 | J | - | - | 93 | 21 | H12 | 185 | L | 41 | J6 | 61 | 70 | L9 |
| 154 | J | - | - | - | - | - | 186 | L | - | - | - | - | - |
| 155 | J | 67 | E8 | 94 | 20 | H11 | 187 | L | 42 | H6 | 62 | 69 | R10 |
| 156 | J | - | - | - | - | - | 188 | L | - | - | - | - | - |
| 157 | J | - | - | 96 | 19 | H10 | 189 | L | 44 | K7 | 63 | 68 | N10 |
| 158 | J | - | - | - | 18 | G11 | 190 | L | - | - | - | 67 | M10 |
| 159 | J | - | - | - | - | - | 191 | L | - | - | - | - | - |
| 160 | J | 68 | E7 | 97 | 17 | G14 | 192 | L | 45 | J7 | 65 | 66 | L10 |



ATF1516AE(L) I/O Pinouts

| MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 100-pin TQFP | 100-ball BGA | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|--------------|--------------|
| 193 | M | - | - | 106 | 4 | B14 | 225 | O | - | - | - | 49 | R13 |
| 194 | M | - | - | - | - | - | 226 | O | - | - | - | - | - |
| 195 | M | 75 | C10 | 107 | 3 | C13 | 227 | O | - | - | 74 | 48 | P13 |
| 196 | M | - | - | - | - | - | 228 | O | - | - | - | - | - |
| 197 | M | - | - | 108 | 206 | B13 | 229 | O | - | - | 75 | 47 | N13 |
| 198 | M | - | - | - | 205 | F12 | 230 | O | - | - | - | 46 | M14 |
| 199 | M | - | - | - | - | - | 231 | O | - | - | - | - | - |
| 200 | M | - | - | 109 | 204 | E12 | 232 | O | 52 | J10 | 77 | 45 | M13 |
| 201 | M | 76 | B10 | 110 | 203 | D12 | 233 | O | 53 | H10 | 78 | 44 | L13 |
| 202 | M | - | - | - | - | - | 234 | O | - | - | - | - | - |
| 203 | M | 77 | B9 | 111 | 202 | C12 | 235 | O | 54 | H9 | 79 | 43 | L14 |
| 204 | M | - | - | - | - | - | 236 | O | - | - | - | - | - |
| 205 | M | - | - | - | 201 | B12 | 237 | O | 55 | J9 | 80 | 42 | L12 |
| 206 | M | 78 | A9 | 112 | 199 | E11 | 238 | O | - | - | - | 40 | L15 |
| 207 | M | - | - | - | - | - | 239 | O | - | - | - | - | - |
| 208 | M | 79 | A8 | 113 | 198 | D11 | 240 | O | 56 | G9 | 81 | 39 | L16 |
| 209 | N | - | - | - | 16 | G13 | 241 | P | 46 | H7 | 66 | 65 | R11 |
| 210 | N | - | - | - | - | - | 242 | P | - | - | - | - | - |
| 211 | N | 69 | D9 | 98 | 15 | G12 | 243 | P | 47 | J8 | 67 | 64 | P11 |
| 212 | N | - | - | - | - | - | 244 | P | - | - | - | - | - |
| 213 | N | - | - | 99 | 13 | F16 | 245 | P | 48 | K8 | 68 | 62 | N11 |
| 214 | N | - | - | - | 12 | F15 | 246 | P | 49 | K9 | 69 | 61 | M11 |
| 215 | N | - | - | - | - | - | 247 | P | - | - | - | - | - |
| 216 | N | 70 | D10 | 100 | 11 | F13 | 248 | P | - | - | - | 60 | T12 |
| 217 | N | - | - | 101 | 10 | F14 | 249 | P | - | - | 70 | 59 | R12 |
| 218 | N | - | - | - | - | - | 250 | P | - | - | - | - | - |
| 219 | N | 71 | D8 | 102 | 9 | E16 | 251 | P | - | - | - | 58 | M12 |
| 220 | N | - | - | - | - | - | 252 | P | - | - | - | - | - |
| 221 | N | 72 | C9 | 103 | 8 | E14 | 253 | P | - | - | 71 | 57 | P12 |
| 222 | N | - | - | - | 7 | E13 | 254 | P | - | - | - | 56 | N12 |
| 223 | N | - | - | - | - | - | 255 | P | - | - | - | - | - |
| 224 | N | 73 | A10 | 104 | 6 | D13 | 256 | P | 50 | K10 | 72 | 55 | T13 |

ATF1516AE(L) Ordering Information

| t _{PD} (ns) | t _{CO1} (ns) | f _{MAX} (MHz) | Ordering Code | Package | Operation Range |
|-------------------------|--------------------------|---------------------------|--|--|--------------------------------|
| 5.5 | 3.5 | 200 | ATF1516AE-5 AC100 ATF1516AE-5 CTC100 ATF1516AE-5 AAC144 ATF1516AE-5 QC208 ATF1516AE-5 CTC256 | 100A 100CT1 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| 7.5 | 4.8 | 133 | ATF1516AE-7 AC100 ATF1516AE-7 CTC100 ATF1516AE-7 AAC144 ATF1516AE-7 QC208 ATF1516AE-7 CTC256 | 100A 100CT1 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| | | | ATF1516AE-7 AI100 ATF1516AE-7 CTI100 ATF1516AE-7 AAI144 ATF1516AE-7 QI208 ATF1516AE-7 CTI256 | 100A 100CT1 144AA 208Q1 256CT1 | Industrial (-40°C to +85°C) |
| 10.0 | 6.4 | 100 | ATF1516AE-10 AC100 ATF1516AE-10 CTC100 ATF1516AE-10 AAC144 ATF1516AE-10 QC208 ATF1516AE-10 CTC256 | 100A 100CT1 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| | | | ATF1516AE-10 AI100 ATF1516AE-10 CTI100 ATF1516AE-10 AAI144 ATF1516AE-10 QI208 ATF1516AE-10 CTI256 | 100A 100CT1 144AA 208Q1 256CT1 | Industrial (-40°C to +85°C) |
| 15.0 | 9.0 | 77 | ATF1508AEL-15 AC100 ATF1508AEL-15 CTC100 ATF1508AEL-15 AAC144 ATF1508AEL-15 QC208 ATF1508AEL-15 CTC256 | 100A 100CT1 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |

Using “C” Product for Industrial

There is very little risk in using “C” devices for industrial applications because the V_{CC} conditions for 3.3V products are the same for commercial and industrial (there is only 15°C difference at the high end of the temperature range). To use commercial product for industrial temperature ranges, de-rate I_{CC} by 15%.

| Package Type | |
|---------------|--|
| 100A | 100-lead, Very Thin Plastic Gull Wing Quad Flatpack (TQFP) |
| 100CT1 | 100-ball, Tape Ball Grid Array (TBGA) 1.0 mm pitch |
| 144AA | 144-lead, Low Profile Plastic Gull Wing Quad Flatpack (LQFP) |
| 208Q1 | 208-lead, Plastic Quad Flatpack (PQFP) |
| 256CT1 | 256-ball, Tape Ball Grid Array (TBGA) 1.0 mm pitch |

AC Characteristics ATF1532AE(L) ⁽¹⁾

| Symbol | Parameter | AE -7 | | AE -10 | | AE -12 | | AEL -15 ⁽⁶⁾ | | Unit |
|----------------------------------|--|-------|-----|--------|------|--------|------|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{PD1} | Input or Feedback to Non-registered Output | | 7.5 | | 10 | | 12 | | 15 | ns |
| t _{PD2} | I/O Input or Feedback to Non-registered Feedback | | 7.5 | | 10 | | 12 | | 12 | ns |
| t _{SU} | Global Clock Setup Time | 5.6 | | 7.6 | | 9.1 | | 11 | | ns |
| t _H | Global Clock Hold Time | 0 | | 0 | | 0 | | 0 | | ns |
| t _{FSU} | Global Clock Setup Time of Fast Input | 3 | | 3 | | 3 | | 3 | | ns |
| t _{FH} | Global Clock Hold of Fast Input | 0 | | 0 | | 0 | | 1 | | MHz |
| t _{COP} | Global Clock to Output Delay | 1 | 4.7 | 1 | 6.3 | 1 | 7.5 | | 9 | ns |
| t _{CH} | Global Clock High Time | 3 | | 4 | | 5 | | 5 | | ns |
| t _{CL} | Global Clock Low Time | 3 | | 4 | | 5 | | 5 | | ns |
| t _{ASU} | Array Clock Setup Time | 2.5 | | 3.5 | | 4.1 | | 5 | | ns |
| t _{AH} | Array Clock Hold Time | 0.2 | | 0.3 | | 0.4 | | 4 | | ns |
| t _{ACOP} | Array Clock Output Delay | 1 | 7.8 | 1 | 10.4 | 1 | 12.5 | | 15 | ns |
| t _{ACH} | Array Clock High Time | 3 | | 4 | | 5 | | 6 | | ns |
| t _{ACL} | Array Clock Low Time | 3 | | 4 | | 5 | | 6 | | ns |
| t _{CNT} | Minimum Clock Global Period | | 8.6 | | 11.5 | | 13.9 | | 13 | ns |
| f _{CNT} ⁽³⁾ | Maximum Internal Global Clock Frequency | 120 | | 90 | | 75 | | 70 | | MHz |
| t _{ACNT} | Minimum Array Clock Period | | 8.6 | | 11.5 | | 13.9 | | 13 | ns |
| f _{ACNT} ⁽⁴⁾ | Maximum Internal Array Clock Frequency | 120 | | 90 | | 75 | | 70 | | MHz |
| f _{MAX} ⁽⁵⁾ | Maximum Clock Frequency | 133 | | 100 | | 80 | | 66 | | MHz |
| t _{IN} | Input Pad and Buffer Delay | | 0.7 | | 0.9 | | 1.0 | | 2 | ns |
| t _{IO} | I/O Input Pad and Buffer Delay | | 0.7 | | 0.9 | | 1.0 | | 2 | ns |
| t _{FIN} | Fast Input Delay | | 3.1 | | 3.6 | | 4.1 | | 2 | ns |
| t _{SEXP} | Foldback Term Delay | | 2.7 | | 3.5 | | 4.4 | | 8 | ns |
| t _{PEXP} | Cascade Logic Delay | | 0.4 | | 0.5 | | 0.6 | | 1 | ns |
| t _{LAD} | Logic Array Delay | | 2.2 | | 2.8 | | 3.5 | | 6 | ns |
| t _{LAC} | Logic Control Delay | | 1.0 | | 1.3 | | 3.5 | | 3.5 | ns |
| t _{IOE} | Internal Output Enable Delay | | 0 | | 0 | | 0 | | 3 | ns |
| t _{OD1} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 1.0 | | 1.5 | | 1.7 | | 3 | ns |
| t _{OD2} | Output Buffer and Pad Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 1.5 | | 2.0 | | 2.2 | | 3 | ns |
| t _{OD3} | Output Buffer and Pad Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 6.0 | | 6.5 | | 6.7 | | 5 | ns |
| t _{ZX1} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 5V; C _L = 35pF) | | 4 | | 5 | | 5 | | 7 | ns |


AC Characteristics ATF1532AE(L) (Continued)⁽¹⁾

| Symbol | Parameter | AE -7 | | AE -10 | | AE -12 | | AEL -15 ⁽⁶⁾ | | Unit |
|---------------------------------|---|-------|-----|--------|-----|--------|-----|------------------------|-----|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t _{ZX2} | Output Buffer Enable Delay (slow slew rate = OFF; V _{CCIO} = 3.3V; C _L = 35pF) | | 4.5 | | 5.5 | | 5.5 | | 7 | ns |
| t _{ZX3} | Output Buffer Enable Delay (slow slew rate = ON; V _{CCIO} = 5V or 3.3V; C _L = 35pF) | | 9 | | 10 | | 10 | | 10 | ns |
| t _{XZ} | Output Buffer Disable Delay (C _L = 5pF) | | 4 | | 5 | | 5 | | 6 | ns |
| t _{SU} | Register Setup Time | 2.1 | | 3.0 | | 3.5 | | 5 | | ns |
| t _H | Register Hold Time | 0.6 | | 0.8 | | 1.0 | | 4 | | ns |
| t _{FSU} | Register Setup Time of Fast Input | 1.6 | | 1.6 | | 1.6 | | 2 | | ns |
| t _{FH} | Register Hold Time of Fast Input | 1.4 | | 1.4 | | 1.4 | | 2 | | ns |
| t _{RD} | Register Delay | | 1.3 | | 1.7 | | 2.1 | | 2 | ns |
| t _{COMB} | Combinatorial Delay | | 0.6 | | 0.8 | | 1.0 | | 2 | ns |
| t _{IC} | Array Clock Delay | | 1.8 | | 2.3 | | 2.9 | | 6 | ns |
| t _{EN} | Register Enable Time | | 1.0 | | 1.3 | | 1.7 | | 6 | ns |
| t _{GLOB} | Global Control Delay | | 1.7 | | 2.2 | | 2.7 | | 2 | ns |
| t _{PRE} | Register Preset Time | | 1.0 | | 1.4 | | 1.7 | | 4 | ns |
| t _{CLR} | Register Clear Time | | 1.0 | | 1.4 | | 4.8 | | 4 | ns |
| t _{UIM} | Switch Matrix Delay | | 3.0 | | 4.0 | | 4.8 | | 2 | ns |
| t _{RPA} ⁽²⁾ | Reduced Power Adder | | 4.5 | | 5.0 | | 5.0 | | 10 | ns |


- Notes:
1. See ordering Information for valid part numbers.
 2. The t_{RPA} parameter must be added to the t_{LAD}, t_{LAC}, t_{IC}, t_{ACL} and t_{SEXP} parameters for macrocells running in the reduced-power mode.
 3. f_{CNT} is the fastest 16-bit counter frequency available, using the local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells). f_{CNT} is also the Export Control Maximum flip-flop toggle rate, f_{TOG}.
 4. f_{ACNT} is the fastest 16-bit counter frequency available, using the internal array clock, local feedback when applicable, and a PIA fan-out of one logic block (16 macrocells).
 5. f_{MAX} is the fastest available frequency for pipeline data.
 6. For clocked applications and frequencies above f_{critical}, OR, non-clocked applications with dormant times less than 1/f_{critical}, the device will achieve the speeds of the -10 column. (See "ITD/automatic power down.")

ATF1532AE(L) Pinouts


144-lead LQFP – Top View

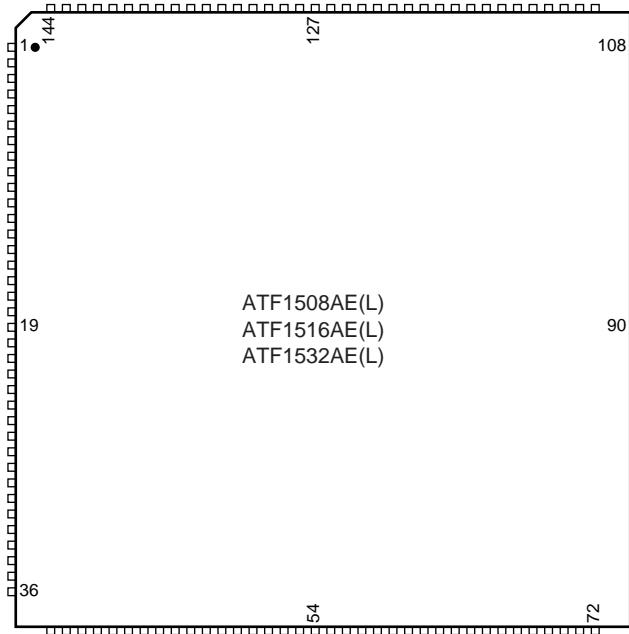

208-lead PQFP – Top View

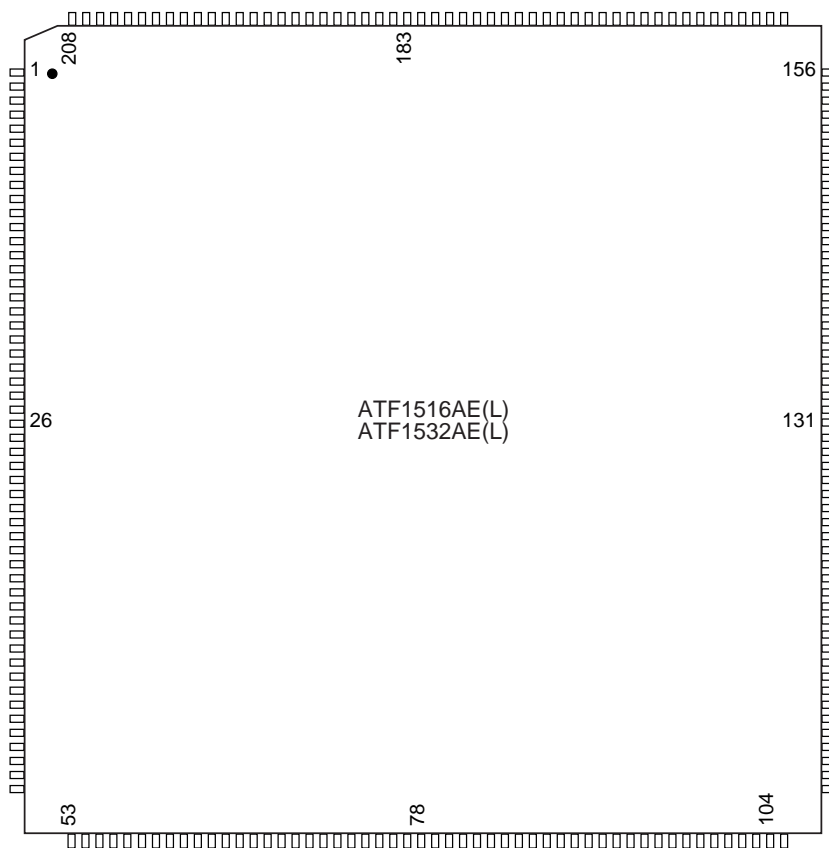

ATF1532AE(L)
256-ball 1.0 mm Pitch
Bottom View

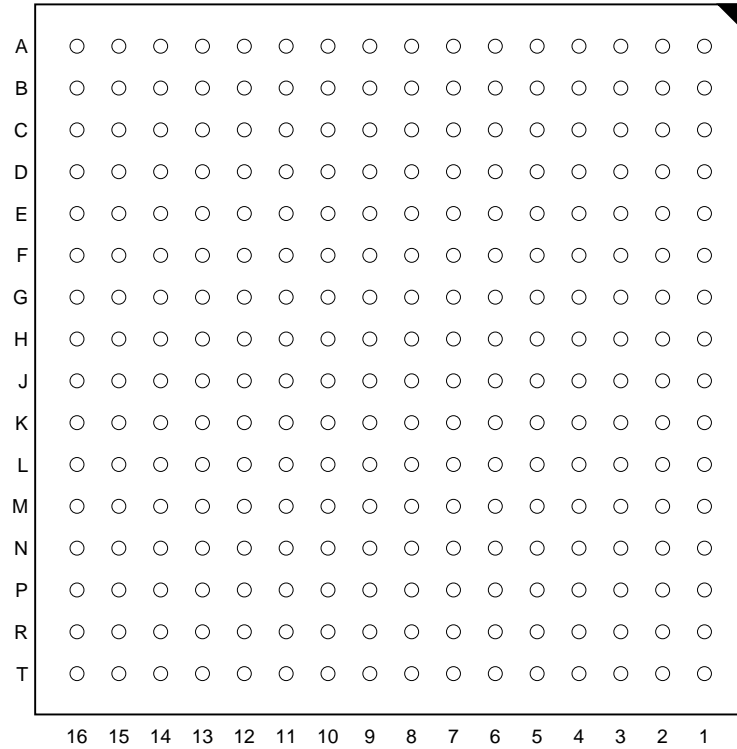

ATF1532AE(L) Dedicated Pinouts

| Dedicated Pin | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|--------------------|-------------------------------------|--|---|
| INPUT/GCLK1 | 125 | 184 | D9 |
| INPUT/GCLR | 127 | 182 | E8 |
| INPUT/OE1 | 126 | 183 | E9 |
| INPUT/OE2/GCK2 | 128 | 181 | D8 |
| I/O/GCLK3 | TBD | TBD | TBD |
| I/O PD (1,2) | TBD | TBD | TBD |
| TDI (JTAG) | 4 | 176 | D4 |
| TMS (JTAG) | 20 | 127 | J6 |
| TCK (JTAG) | 89 | 30 | J11 |
| TDO (JTAG) | 104 | 189 | D13 |
| GNDINT | 52, 57, 124, 129 | 75, 82, 180, 185 | A8, C9, G9, K8, P9 |
| GNDIO | 3, 13, 17, 33, 59, 64, 85, 105, 135 | 14, 32, 50, 51, 94, 116, 134, 152, 158, 200 | A3, B10, C2, D14, F6, G10, H8, J9, K7, L11, M3, P6, P10, R2, R3, T1, T15 |
| VCCINT | 51, 58, 123, 130 | 74, 83, 179, 186 | B9, C8, G8, K9, P8 |
| VCCIO | 24, 50, 73, 76, 95, 115, 144 | 5, 23, 41, 63, 85, 105, 107, 125, 143, 165, 191, 207 | B3, B5, C14, E15, F11, G3, G7, G15, H9, J8, K10, L3, L6, M15, P14, T2, T3 |
| No Connect | - | - | - |
| # of Signal pins | 120 | 176 | 212 |
| # of User I/O pins | 116 | 172 | 206 |

OE (1,2) Global OE pins.

GCLR Global Clear pin.

GCLK (1,2,3) Global Clock pins.

TDI, TMS, TCK, TDO JTAG pins used for In System Programming or Boundary-scan Testing.

GNDINT Ground pins for the internal device logic.

GNDIO Ground pins for the I/O drivers.

VCCINT VCC pins for the internal device logic.

VCCIO VCC pins for the I/O drivers.

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|----|-----|--------------|--------------|--------------|----|-----|--------------|--------------|--------------|
| 1 | A | 134 | 173 | D7 | 33 | C | 142 | 163 | E4 |
| 2 | A | - | - | - | 34 | C | - | - | - |
| 3 | A | - | - | - | 35 | C | - | - | - |
| 4 | A | - | - | - | 36 | C | - | - | - |
| 5 | A | - | - | C7 | 37 | C | 141 | 164 | C5 |
| 6 | A | - | - | - | 38 | C | - | - | - |
| 7 | A | - | - | - | 39 | C | - | - | - |
| 8 | A | - | - | - | 40 | C | - | - | - |
| 9 | A | - | 175 | B7 | 41 | C | 140 | 166 | A5 |
| 10 | A | - | - | - | 42 | C | - | - | - |
| 11 | A | 133 | 176 | A7 | 43 | C | - | 167 | D5 |
| 12 | A | - | - | - | 44 | C | - | - | - |
| 13 | A | - | - | - | 45 | C | - | - | - |
| 14 | A | 132 | 177 | F8 | 46 | C | 139 | 168 | E5 |
| 15 | A | - | - | - | 47 | C | - | - | - |
| 16 | A | 131 | 178 | B8 | 48 | C | - | - | E6 |
| 17 | B | - | 169 | D6 | 49 | D | 2 | - | B2 |
| 18 | B | - | - | - | 50 | D | - | - | - |
| 19 | B | - | - | - | 51 | D | - | - | - |
| 20 | B | - | - | - | 52 | D | - | - | - |
| 21 | B | 138 | 170 | C6 | 53 | D | 1 | - | A2 |
| 22 | B | - | - | - | 54 | D | - | - | - |
| 23 | B | - | - | - | 55 | D | - | - | - |
| 24 | B | - | - | - | 56 | D | - | - | - |
| 25 | B | 137 | 171 | B6 | 57 | D | - | 159 | B4 |
| 26 | B | - | - | - | 58 | D | - | - | - |
| 27 | B | 136 | 172 | A6 | 59 | D | - | 160 | A4 |
| 28 | B | - | - | - | 60 | D | - | - | - |
| 29 | B | - | - | - | 61 | D | - | - | - |
| 30 | B | - | - | F7 | 62 | D | - | 161 | C4 |
| 31 | B | - | - | - | 63 | D | - | - | - |
| 32 | B | - | - | E7 | 64 | D | 143 | 162 | C3 |



ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 65 | E | - | - | E3 | 97 | G | - | - | H6 |
| 66 | E | - | - | - | 98 | G | - | - | - |
| 67 | E | 7 | 153 | C1 | 99 | G | 15 | 141 | G5 |
| 68 | E | - | - | - | 100 | G | - | - | - |
| 69 | E | - | - | B1 | 101 | G | 14 | 142 | G4 |
| 70 | E | - | - | - | 102 | G | - | - | - |
| 71 | E | - | - | - | 103 | G | - | - | - |
| 72 | E | - | - | - | 104 | G | - | - | - |
| 73 | E | - | 154 | A1 | 105 | G | - | 144 | G4 |
| 74 | E | - | - | - | 106 | G | - | - | - |
| 75 | E | 6 | 155 | D2 | 107 | G | - | 145 | G1 |
| 76 | E | - | - | - | 108 | G | - | - | - |
| 77 | E | - | - | - | 109 | G | - | - | - |
| 78 | E | 5 | 156 | D3 | 110 | G | 12 | 146 | G6 |
| 79 | E | - | - | - | 111 | G | - | - | - |
| 80 | E | 4 | 157 | D4 | 112 | G | - | - | F5 |
| 81 | F | - | 147 | F2 | 113 | H | 19 | 135 | J1 |
| 82 | F | - | - | - | 114 | H | - | - | - |
| 83 | F | - | 148 | F3 | 115 | H | - | 136 | H7 |
| 84 | F | - | - | - | 116 | H | - | - | - |
| 85 | F | 11 | 149 | F1 | 117 | H | 18 | 137 | H5 |
| 86 | F | - | - | - | 118 | H | - | - | - |
| 87 | F | - | - | - | 119 | H | - | - | - |
| 88 | F | - | - | - | 120 | H | - | - | - |
| 89 | F | - | - | F4 | 121 | H | - | - | H2 |
| 90 | F | - | - | - | 122 | H | - | - | - |
| 91 | F | 10 | 150 | E1 | 123 | H | - | 138 | H3 |
| 92 | F | - | - | - | 124 | H | - | - | - |
| 93 | F | - | - | - | 125 | H | - | - | - |
| 94 | F | 9 | 151 | D1 | 126 | H | - | 139 | H1 |
| 95 | F | - | - | - | 127 | H | - | - | - |
| 96 | F | 8 | - | E2 | 128 | H | 16 | 140 | H4 |

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 129 | I | - | - | K1 | 161 | K | 29 | 115 | N4 |
| 130 | I | - | - | - | 162 | K | - | - | - |
| 131 | I | - | 129 | J7 | 163 | K | - | 117 | M2 |
| 132 | I | - | - | - | 164 | K | - | - | - |
| 133 | I | 20 | 130 | J6 | 165 | K | - | 118 | M1 |
| 134 | I | - | - | - | 166 | K | - | - | - |
| 135 | I | - | - | - | 167 | K | - | - | - |
| 136 | I | - | - | - | 168 | K | - | - | - |
| 137 | I | - | 131 | J5 | 169 | K | 28 | 119 | M4 |
| 138 | I | - | - | - | 170 | K | - | - | - |
| 139 | I | - | - | J4 | 171 | K | - | - | M5 |
| 140 | I | - | - | - | 172 | K | - | - | - |
| 141 | I | - | - | - | 173 | K | - | - | - |
| 142 | I | - | 132 | J3 | 174 | K | - | 120 | L5 |
| 143 | I | - | - | - | 175 | K | - | - | - |
| 144 | I | - | 133 | J2 | 176 | K | 27 | 121 | L4 |
| 145 | J | - | 122 | L2 | 177 | L | 34 | 109 | R1 |
| 146 | J | - | - | - | 178 | L | - | - | - |
| 147 | J | - | - | L1 | 179 | L | - | - | - |
| 148 | J | - | - | - | 180 | L | - | - | - |
| 149 | J | 26 | 123 | K6 | 181 | L | 32 | 110 | P2 |
| 150 | J | - | - | - | 182 | L | - | - | - |
| 151 | J | - | - | - | 183 | L | - | - | - |
| 152 | J | - | - | - | 184 | L | - | - | - |
| 153 | J | 25 | 124 | K5 | 185 | L | - | 111 | N3 |
| 154 | J | - | - | - | 186 | L | - | - | - |
| 155 | J | 23 | 126 | K4 | 187 | L | - | 112 | N2 |
| 156 | J | - | - | - | 188 | L | - | - | - |
| 157 | J | - | - | - | 189 | L | - | - | - |
| 158 | J | 22 | 127 | K3 | 190 | L | 31 | 113 | P1 |
| 159 | J | - | - | - | 191 | L | - | - | - |
| 160 | J | 21 | 128 | K2 | 192 | L | 30 | 114 | N1 |

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 193 | M | - | 101 | P5 | 225 | O | 47 | 88 | R7 |
| 194 | M | - | - | - | 226 | O | - | - | - |
| 195 | M | - | - | - | 227 | O | 46 | 89 | P7 |
| 196 | M | - | - | - | 228 | O | - | - | - |
| 197 | M | - | 102 | N5 | 229 | O | 45 | 90 | T7 |
| 198 | M | - | - | - | 230 | O | - | - | - |
| 199 | M | - | - | - | 231 | O | - | - | - |
| 200 | M | - | - | - | 232 | O | - | - | - |
| 201 | M | 37 | 103 | T4 | 233 | O | - | 91 | L8 |
| 202 | M | - | - | - | 234 | O | - | - | - |
| 203 | M | - | 104 | R4 | 235 | O | 44 | 92 | N7 |
| 204 | M | - | - | - | 236 | O | - | - | - |
| 205 | M | - | - | - | 237 | O | - | - | - |
| 206 | M | 36 | 106 | P4 | 238 | O | - | - | M7 |
| 207 | M | - | - | - | 239 | O | - | - | - |
| 208 | M | 35 | 108 | P3 | 240 | O | 43 | 93 | L7 |
| 209 | N | 42 | 95 | R6 | 241 | P | 54 | 79 | M9 |
| 210 | N | - | - | - | 242 | P | - | - | - |
| 211 | N | - | - | - | 243 | P | - | - | - |
| 212 | N | - | - | - | 244 | P | - | - | - |
| 213 | N | 41 | 96 | T6 | 245 | P | - | 80 | L9 |
| 214 | N | - | - | - | 246 | P | - | - | - |
| 215 | N | - | - | - | 247 | P | - | - | - |
| 216 | N | - | - | - | 248 | P | - | - | - |
| 217 | N | 40 | 97 | N6 | 249 | P | 53 | 81 | R8 |
| 218 | N | - | - | - | 250 | P | - | - | - |
| 219 | N | 39 | 98 | M6 | 251 | P | - | 84 | T8 |
| 220 | N | - | - | - | 252 | P | - | - | - |
| 221 | N | - | - | - | 253 | P | - | - | - |
| 222 | N | - | 99 | R5 | 254 | P | 49 | 86 | N8 |
| 223 | N | - | - | - | 255 | P | - | - | - |
| 224 | N | 38 | 100 | T5 | 256 | P | 48 | 87 | M8 |

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 257 | Q | 55 | 78 | N9 | 289 | S | 66 | 62 | K11 |
| 258 | Q | - | - | - | 290 | S | - | - | - |
| 259 | Q | - | - | - | 291 | S | - | - | - |
| 260 | Q | - | - | - | 292 | S | - | - | - |
| 261 | Q | - | 77 | T9 | 293 | S | 67 | 61 | M12 |
| 262 | Q | - | - | - | 294 | S | - | - | - |
| 263 | Q | - | - | - | 295 | S | - | - | - |
| 264 | Q | - | - | - | 296 | S | - | - | - |
| 265 | Q | 56 | 76 | R9 | 297 | S | 68 | 60 | N12 |
| 266 | Q | - | - | - | 298 | S | - | - | - |
| 267 | Q | - | 73 | L10 | 299 | S | 69 | 59 | T12 |
| 268 | Q | - | - | - | 300 | S | - | - | - |
| 269 | Q | - | - | - | 301 | S | - | - | - |
| 270 | Q | 60 | 71 | M10 | 302 | S | - | 58 | R12 |
| 271 | Q | - | - | - | 303 | S | - | - | - |
| 272 | Q | 61 | 70 | N10 | 304 | S | 70 | 57 | T13 |
| 273 | R | 62 | 69 | R10 | 305 | T | - | 56 | P12 |
| 274 | R | - | - | - | 306 | T | - | - | - |
| 275 | R | 63 | 68 | T10 | 307 | T | - | - | - |
| 276 | R | - | - | - | 308 | T | - | - | - |
| 277 | R | - | 67 | M11 | 309 | T | - | 55 | T14 |
| 278 | R | - | - | - | 310 | T | - | - | - |
| 279 | R | - | - | - | 311 | T | - | - | - |
| 280 | R | - | - | - | 312 | T | - | - | - |
| 281 | R | - | 66 | N11 | 313 | T | 71 | 54 | P13 |
| 282 | R | - | - | - | 314 | T | - | - | - |
| 283 | R | 65 | 65 | P11 | 315 | T | 72 | 53 | R13 |
| 284 | R | - | - | - | 316 | T | - | - | - |
| 285 | R | - | - | - | 317 | T | - | - | - |
| 286 | R | - | - | R11 | 318 | T | - | 52 | R14 |
| 287 | R | - | - | - | 319 | T | - | - | - |
| 288 | R | - | 64 | T11 | 320 | T | 74 | 49 | R15 |



ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 321 | U | 75 | 48 | P15 | 353 | W | 82 | 35 | L16 |
| 322 | U | - | - | - | 354 | W | - | - | - |
| 323 | U | - | - | - | 355 | W | - | - | L13 |
| 324 | U | - | - | - | 356 | W | - | - | - |
| 325 | U | - | 47 | N15 | 357 | W | 83 | 34 | L12 |
| 326 | U | - | - | - | 358 | W | - | - | - |
| 327 | U | - | - | - | 359 | W | - | - | - |
| 328 | U | - | - | - | 360 | W | - | - | - |
| 329 | U | - | 46 | T16 | 361 | W | 84 | 33 | K12 |
| 330 | U | - | - | - | 362 | W | - | - | - |
| 331 | U | - | 45 | R16 | 363 | W | 86 | 31 | K14 |
| 332 | U | - | - | - | 364 | W | - | - | - |
| 333 | U | - | - | - | 365 | W | - | - | - |
| 334 | U | 77 | 44 | P16 | 366 | W | 87 | 30 | K15 |
| 335 | U | - | - | - | 367 | W | - | - | - |
| 336 | U | 78 | 43 | N14 | 368 | W | 88 | 29 | K16 |
| 337 | V | 79 | 42 | N16 | 369 | X | 89 | | J11 |
| 338 | V | - | - | - | 370 | X | - | - | - |
| 339 | V | 80 | 40 | M14 | 371 | X | - | 28 | J12 |
| 340 | V | - | - | - | 372 | X | - | - | - |
| 341 | V | - | 39 | N13 | 373 | X | - | 27 | J13 |
| 342 | V | - | - | - | 374 | X | - | - | - |
| 343 | V | - | - | - | 375 | X | - | - | - |
| 344 | V | - | - | - | 376 | X | - | - | - |
| 345 | V | 81 | 38 | M16 | 377 | X | - | 26 | J14 |
| 346 | V | - | - | - | 378 | X | - | - | - |
| 347 | V | - | - | M13 | 379 | X | - | - | J15 |
| 348 | V | - | - | - | 380 | X | - | - | - |
| 349 | V | - | - | - | 381 | X | - | - | - |
| 350 | V | - | 37 | L14 | 382 | X | - | 25 | K13 |
| 351 | V | - | - | - | 383 | X | - | - | - |
| 352 | V | - | 36 | L15 | 384 | X | 90 | 24 | J16 |

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 385 | Y | 91 | 22 | H10 | 417 | AA | - | 10 | F14 |
| 386 | Y | - | - | - | 418 | AA | - | - | - |
| 387 | Y | - | 21 | H11 | 419 | AA | - | 9 | F15 |
| 388 | Y | - | - | - | 420 | AA | - | - | - |
| 389 | Y | 92 | 20 | H12 | 421 | AA | 98 | 8 | F16 |
| 390 | Y | - | - | - | 422 | AA | - | - | - |
| 391 | Y | - | - | - | 423 | AA | - | - | - |
| 392 | Y | - | - | - | 424 | AA | - | - | - |
| 393 | Y | - | - | H15 | 425 | AA | - | - | E12 |
| 394 | Y | - | - | - | 426 | AA | - | - | - |
| 395 | Y | - | 19 | H16 | 427 | AA | 99 | 7 | E13 |
| 396 | Y | - | - | - | 428 | AA | - | - | - |
| 397 | Y | - | - | - | 429 | AA | - | - | - |
| 398 | Y | - | 18 | H14 | 430 | AA | 100 | 6 | E14 |
| 399 | Y | - | - | - | 431 | AA | - | - | - |
| 400 | Y | 93 | 17 | H13 | 432 | AA | 101 | - | E16 |
| 401 | Z | - | - | G12 | 433 | BB | - | - | D16 |
| 402 | Z | - | - | - | 434 | BB | - | - | - |
| 403 | Z | - | 16 | G13 | 435 | BB | 102 | 4 | C16 |
| 404 | Z | - | - | - | 436 | BB | - | - | - |
| 405 | Z | 94 | 15 | G14 | 437 | BB | - | - | B16 |
| 406 | Z | - | - | - | 438 | BB | - | - | - |
| 407 | Z | - | - | - | 439 | BB | - | - | - |
| 408 | Z | - | - | - | 440 | BB | - | - | - |
| 409 | Z | 96 | 13 | G16 | 441 | BB | - | 3 | A16 |
| 410 | Z | - | - | - | 442 | BB | - | - | - |
| 411 | Z | - | 12 | G11 | 443 | BB | 103 | 2 | D15 |
| 412 | Z | - | - | - | 444 | BB | - | - | - |
| 413 | Z | - | - | - | 445 | BB | - | - | - |
| 414 | Z | 97 | 11 | F12 | 446 | BB | 104 | 1 | D13 |
| 415 | Z | - | - | - | 447 | BB | - | - | - |
| 416 | Z | - | - | F13 | 448 | BB | 106 | 208 | C15 |

ATF1532AE(L) I/O Pinouts

| MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA | MC | PLB | 144-pin LQFP | 208-pin PQFP | 256-ball BGA |
|-----|-----|--------------|--------------|--------------|-----|-----|--------------|--------------|--------------|
| 449 | CC | - | - | B15 | 481 | EE | - | 196 | D11 |
| 450 | CC | - | - | - | 482 | EE | - | - | - |
| 451 | CC | - | - | - | 483 | EE | - | - | - |
| 452 | CC | - | - | - | 484 | EE | - | - | - |
| 453 | CC | 107 | - | A15 | 485 | EE | 113 | 195 | C11 |
| 454 | CC | - | - | - | 486 | EE | - | - | - |
| 455 | CC | - | - | - | 487 | EE | - | - | - |
| 456 | CC | - | - | - | 488 | EE | - | - | - |
| 457 | CC | 108 | 206 | B14 | 489 | EE | 114 | 194 | A11 |
| 458 | CC | - | - | - | 490 | EE | - | - | - |
| 459 | CC | - | 205 | A14 | 491 | EE | 116 | 193 | B11 |
| 460 | CC | - | - | - | 492 | EE | - | - | - |
| 461 | CC | - | - | - | 493 | EE | - | - | - |
| 462 | CC | - | 204 | B13 | 494 | EE | 117 | - | F10 |
| 463 | CC | - | - | - | 495 | EE | - | - | - |
| 464 | CC | 109 | 203 | A13 | 496 | EE | - | - | E10 |
| 465 | DD | - | 202 | C13 | 497 | FF | 118 | 192 | D10 |
| 466 | DD | - | - | - | 498 | FF | - | - | - |
| 467 | DD | - | - | - | 499 | FF | - | - | - |
| 468 | DD | - | - | - | 500 | FF | - | - | - |
| 469 | DD | 110 | 201 | D12 | 501 | FF | - | - | C10 |
| 470 | DD | - | - | - | 502 | FF | - | - | - |
| 471 | DD | - | - | - | 503 | FF | - | - | - |
| 472 | DD | - | - | - | 504 | FF | - | - | - |
| 473 | DD | 111 | 199 | C12 | 505 | FF | 119 | 190 | A10 |
| 474 | DD | - | - | - | 506 | FF | - | - | - |
| 475 | DD | - | 198 | B12 | 507 | FF | 120 | 189 | J10 |
| 476 | DD | - | - | - | 508 | FF | - | - | - |
| 477 | DD | - | - | - | 509 | FF | - | - | - |
| 478 | DD | 112 | 197 | A12 | 510 | FF | 121 | 188 | F9 |
| 479 | DD | - | - | - | 511 | FF | - | - | - |
| 480 | DD | - | - | E11 | 512 | FF | 122 | 187 | A9 |

ATF1532AE(L) Ordering Information

| t _{PD} (ns) | t _{CO1} (ns) | f _{MAX} (MHz) | Ordering Code | Package | Operation Range |
|-------------------------|--------------------------|---------------------------|---|--------------------------|--------------------------------|
| 7.5 | 4.7 | 133 | ATF1532AE-7 AAC144 ATF1532AE-7 QC208 ATF1532AE-7 CTC256 | 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| 10.0 | 6.3 | 100 | ATF1532AE-10 AAC144 ATF1532AE-10 QC208 ATF1532AE-10 CTC256 | 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| | | | ATF1532AE-10 AAI144 ATF1532AE-10 QI208 ATF1532AE-10 CTI256 | 144AA 208Q1 256CT1 | Industrial (-40°C to +85°C) |
| 12.0 | 7.5 | 80 | ATF1532AE-12 AAC144 ATF1532AE-12 QC208 ATF1532AE-12 CTC256 | 144AA 208Q1 256CT1 | Commercial (0°C to 70°C) |
| | | | ATF1532AE-12 AAI144 ATF1532AE-12 QI208 ATF1532AE-12 CTI256 | 144AA 208Q1 256CT1 | Industrial (-40°C to +85°C) |
| 15.0 | 9.0 | 66 | ATF1508AEL-15 AAC144 ATF1508AEL-15 CC208 ATF1508AEL-15 CTC256 | 144AA 169Q1 256CT1 | Commercial (0°C to 70°C) |

Using “C” Product for Industrial

There is very little risk in using “C” devices for industrial applications because the V_{CC} conditions for 3.3V products are the same for commercial and industrial (there is only 15°C difference at the high end of the temperature range). To use commercial product for industrial temperature ranges, de-rate I_{CC} by 15%.

| Package Type | |
|---------------|--|
| 144AA | 144-lead, Very Thin Plastic Gull Wing Quad Flatpack (LQFP) |
| 208Q1 | 208-ball, Plastic Quad Flatpack (PQFP) |
| 256CT1 | 256-lead, Tape Ball Grid Array (TBGA) 1.0 mm pitch |



Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131, USA
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906, USA
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

Literature Requests

www.atmel.com/literature

Disclaimer: Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2003. All rights reserved. Atmel® and combinations thereof, are the registered trademarks, and Logic Doubling™ is the trademark of Atmel Corporation or its subsidiaries. Other terms and product names may be the trademarks of others.



Printed on recycled paper.