


SPECIFICATION CONTROL DRAWING

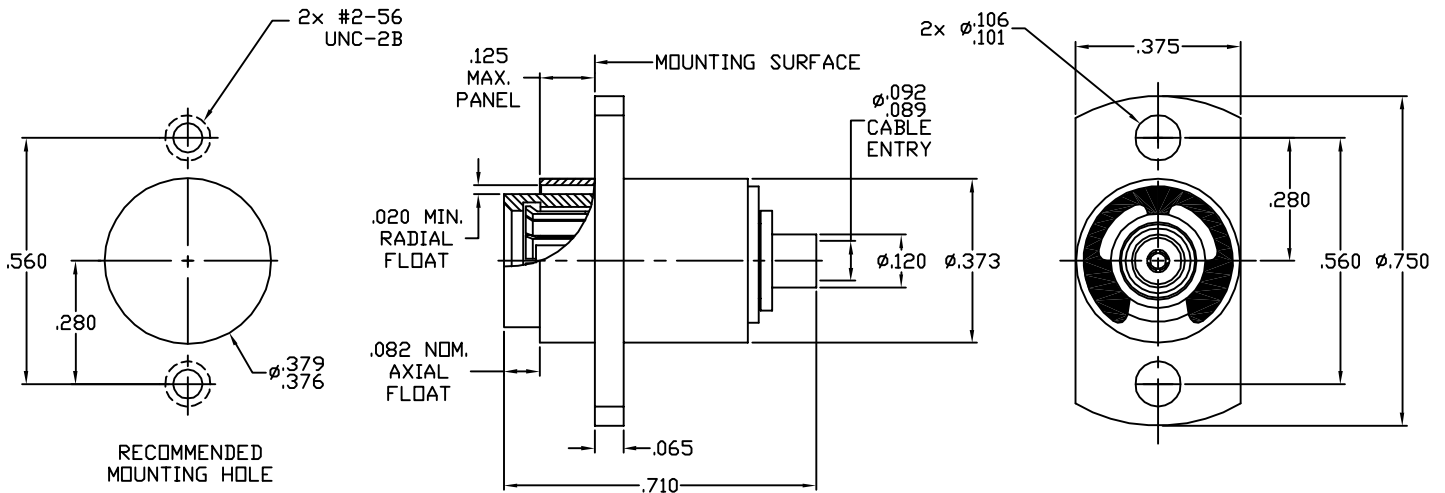

1. MATING INTERFACE DIMENSIONS PER MIL-STD-348A, Fig. 321.2 AND DYNAWAVE MD-67 (BMA, JACK)

2. ELECTRICAL

FREQUENCY RANGE GHz	_____	DC TO 18.0 GHz
VSWR (MAX.) *	_____	1.06 + .005 x FGHz.
INSERTION LOSS (dB MAX.)		
• BMA INTERFACE GAP (.000 TO .015)	_____	.04 dB x $\sqrt{\text{FGHz}}$
• BMA INTERFACE GAP (.016 TO .030)	_____	.06 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	_____	50
VOLTAGE RATING (MAX. VRMS)	_____	250
RF LEAKAGE (MIN. dB DOWN)		
• BMA INTERFACE BOTTOMED (.000 GAP)	_____	-100 dB - FGHz
• BMA INTERFACE GAP (.001 TO .015)	_____	-90 dB - FGHz
• BMA INTERFACE GAP (.016 TO .030)	_____	-75 dB - FGHz
TEMPERATURE RATING (DEGREES CENTIGRADE)	_____	-65° c TO + 165° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	_____	750
INSULATION RESISTANCE (MIN. MEGOHMS)	_____	5,000
CONTACT RESISTANCE		
• CENTER CONTACT (MAX. MILLIOHMS)	_____	6.0
• OUTER CONTACT (MAX. MILLIOHMS)	_____	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			INCORPORATED HAVERHILL, MA. 01835
AA	07-1592	6/11/07	DC	DECIMALS	FRACTIONAL	ANGULAR	
				.X ± .030 .XX ± .010 .XXX ± .005	± 1/64	X° ± 1° 0' X° X' ± 15'	
				DRAWN	DC	DATE 6/11/07	
				APPROVED	DC	DATE 6/11/07	TITLE BMA JACK, 2 HOLE FLANGE FLOATING REAR MOUNT DIRECT SOLDER TO .085 S/R CABLE
				CODE IDENT.	SHEET 1 OF 2		DWG. NO. 6762-8521-6256
				2J899			

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 4.0 LBS.
- MIN. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) _____ INTERFACE 32.0
- WITHDRAWAL (MIN. OUNCES) _____ INTERFACE 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 1,000

RECOMMENDED MATING TORQUE _____ N/A

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65° c TO + 165° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

CONNECTOR BODY & FLANGE BODY _____ STAINLESS STEEL PER ASTM A581, TYPE 303, COND. A

CENTER CONTACT & SPRING FINGERS _____ BERYLLIUM COPPER PER ASTM 196/B 196M-03, COPPER ALLOY
UNS-C-17800, TEMPER TD04

INSULATOR _____ TEFLON PER ASTM D 1710-02, TYPE 1, GRADE 1, CLASS B

CENTER CONTACT HOOD _____ BRASS PER ASTM B16, TEMPER H02, ALLOY C36000

RETAINING RING _____ SPRING STEEL PER SAE 1060-1090

6. FINISH

CONNECTOR BODY _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 1.25, (.000050 MIN. THK.)
OVER NICKEL PER QQ-N-290, (.000150 MIN. THK.)

FLANGE BODY _____ PASSIVATE PER AMS QQ-P-35, TYPE 2

CENTER CONTACT ASSY & SPRING FINGERS _____ GOLD PER ASTM-B-488, TYPE I, CODE C, CLASS 2.5, (.000100 MIN. THK.)
OVER NICKEL PER QQ-N-290, (.000050 MIN. THK.)
OVER COPPER PER MIL-C-14550, (.000010 MIN. THK.)

RETAINING RING _____ CORROSION RETARDANT PHOSPHATE COATING
PER MIL-P-16232D, TYPE Z

INSULATOR _____ N/A