


SPECIFICATIONS:
 Current Rating: 3A AMP
 Dielectric Voltage: 500V AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulator Resistance: 5000 Megohms Min.
 Insulator: PBT+30% Glass Filled
 UL 94V-0
 Contact : Phosphor Bronze Or Brass
 Gold Flash Over Nickel Or Tin

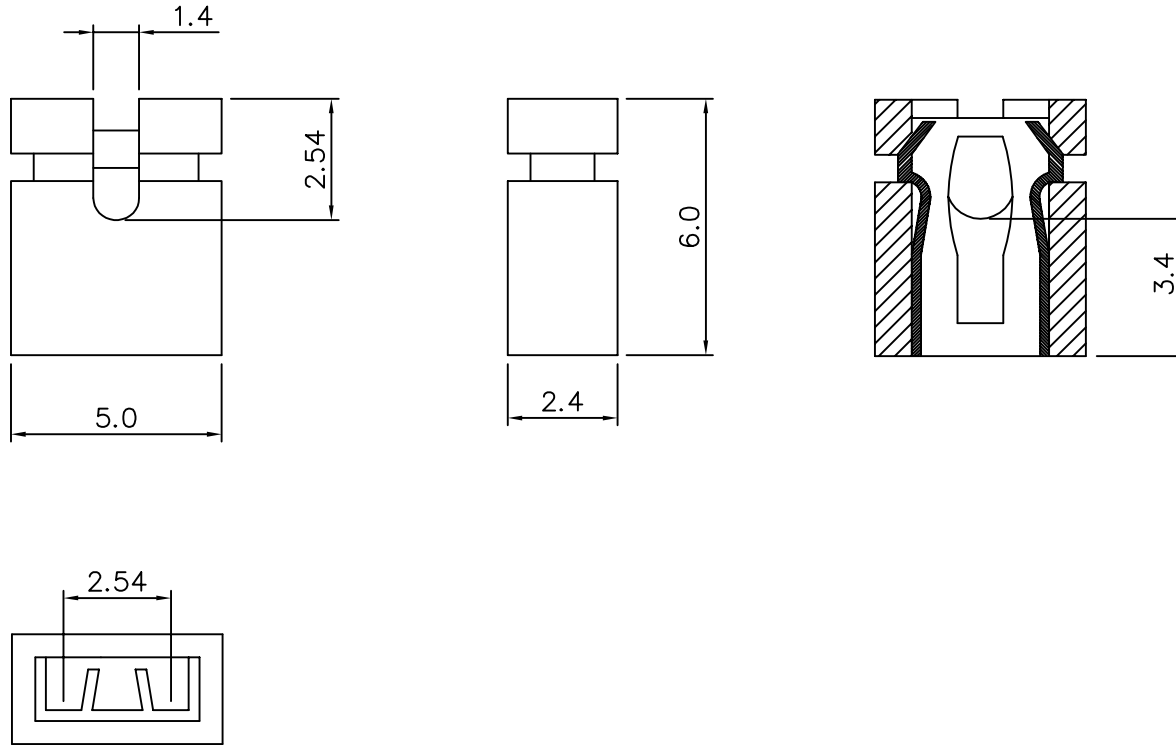

AUK A NUMBER OF AUK GROUP
 太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 JB6-BL

APPROVED BY
 MEI
 CHECKED BY
 RAN
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE