66256-2 - ACTIVE

AMP

TE Internal #: 66256-2 Power Contacts, Contact, Gold, 14 – 12AWG / 16AWG Wire Size, 2 – 3mm² / 1.25 – 1.4mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: **Contact** Contact Mating Area Plating Material: **Gold** Wire Size: **1.25 – 1.4 mm², 2 – 3 mm²**

Connector System: Wire-to-Wire

Features

Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

TE

Electrical Characteristics

Test (Current

35 A

Contact Features

Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	35 A
Contact Type	Tab
Mating Tab Width	5.84 mm[.23 in]
Mating Tab Thickness	2.67 mm[.105 in]
Contact Base Material	Copper
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material	Gold
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Right Angle
Contact Underplating Material	Copper

Termination Features

Power Contacts, Contact, Gold, 14 – 12AWG / 16AWG Wire Size, 2 – 3mm² / 1.25 – 1.4 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	1.25 – 1.4 mm², 2 – 3 mm²
Accepts Wire Insulation Diameter Range	3.43 – 4.06 mm[.135 – .16 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C, -40 – 85 °C[-40 – 185 °F][-40 – 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Method	Reel
Packaging Quantity	1500
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors, G Series Connectors, M

Series Connectors

The long pin is 0.126 inches (3.2 mm) longer than the standard pin

Comment

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

Power Contacts, Contact, Gold, 14 – 12AWG / 16AWG Wire Size, 2 – 3mm² / 1.25 – 1.4 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

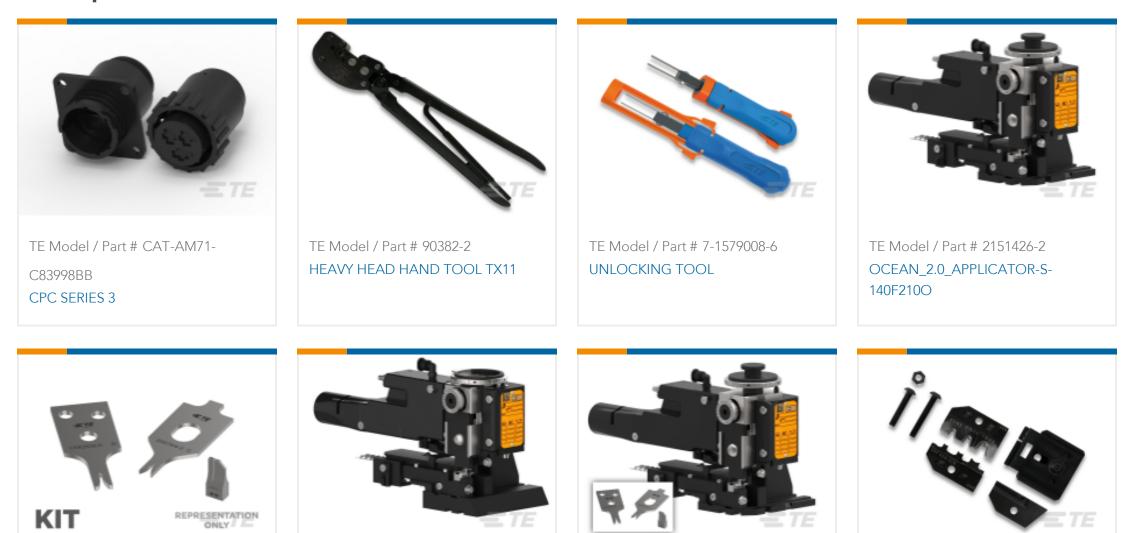

TE Model / Part # 7-2151426-7 OCEAN_2.0_SPARE_PART_KIT-140F210O

TE Model / Part # 2-2151426-2 OCEAN_2.0_APPLICATOR-S-140F210O TE Model / Part # 7-2151426-2 OCEAN_2.0_APPLICATOR-S-140F210O TE Model / Part # 539668-2 MATRIZE TYPE 3+

Customers Also Bought



Power Contacts, Contact, Gold, 14 – 12AWG / 16AWG Wire Size, 2 – 3mm² / 1.25 – 1.4 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp







Documents

Product Drawings MALE CONTACT ASSY. (STRIP)

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_66256-2_AC.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_66256-2_AC.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66256-2_AC.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Power Contacts

English

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Products for Aerospace and Defense

English

Power Contacts, Contact, Gold, 14 – 12AWG / 16AWG Wire Size, 2 – 3mm² / 1.25 – 1.4 mm² Wire Size, Wire-to-Wire, Wire & Cable, Crimp



Product Specifications Application Specification

English