
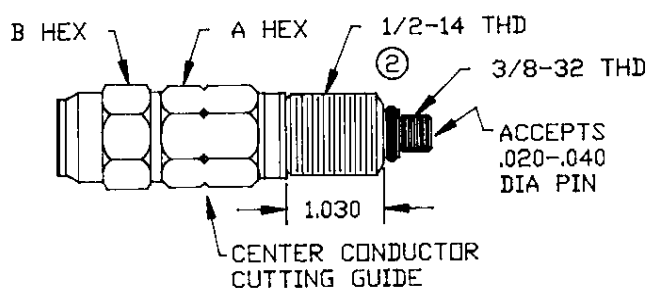


**“K” SERIES
TWO PIECE
CABLE TO “F” FEMALE
ADAPTOR BULKHEAD**

Bulkhead connector capable of being secured in place for permanent mounting.

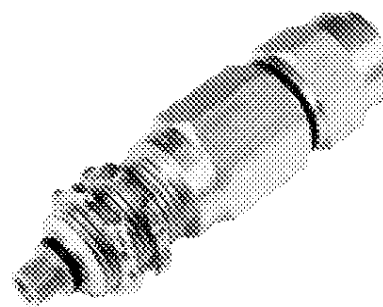

② Conduit Nuts Included

Ordering Information — “F” Female Adaptor Bulkhead



PART NUMBER	CABLE GROUP	CENTER COND.	CABLE O.D.	DIMENSION	
				A	B
BI412FFK	A	.080	.412	13/16	7/8
BI412FFK3	E,J	.092	.412	13/16	7/8
BI440FFMC2	I	.105	.450	1	1
BI500FFK	A	.100	.500	1	1
BI500FFK3	E,J	.109	.500	1	1
BI500FFMC2	I	.123	.510	1	1
BI500FFQR	H	.117	.580	1	1
BI540FFQR	H	.124	.610	1	1
BI565FFTX	G	.129	.565	1	1
BI625FFK3	E	.137	.625	1	1
BI650FFMC2	I	.156	.640	1-1/8	1-1/8
BI700FFTX	G	.163	.703	1-1/8	1-1/8
BI715FFQR	H	.166	.785	1-3/16	1-3/16
BI750FFK	A	.148	.750	1-1/8	1-1/8
BI750FFK3	E	.167	.750	1-1/8	1-1/8
BI750FFMC2	I	.185	.760	1-1/8	1-1/8
BI840FFTX	G	.194	.840	1-3/8	1-3/8
BI860FFQR	H	.203	.960	1-1/2	1-1/2
BI875FFK3	E	.194	.875	1-3/8	1-3/8
BI1000FFK3	E	.220	1.000	1-1/2	1-1/2
BI1000FFMC2	I	.248	1.015	1-1/2	1-1/2
BI1125FFQR	H	.263	1.225	1-3/4	1-3/4
BI1160FFTX	G	.269	1.160	1-3/4	1-3/4

*See Cable Group Chart on Page 30 Patent #4,346,958

Dimensions shown are for reference only. Dimensions are in inches.

“W” SERIES THREE PIECE CABLE TO “F” FEMALE ADAPTOR BULKHEAD

Bulkhead connector capable of being secured in place for permanent mounting.

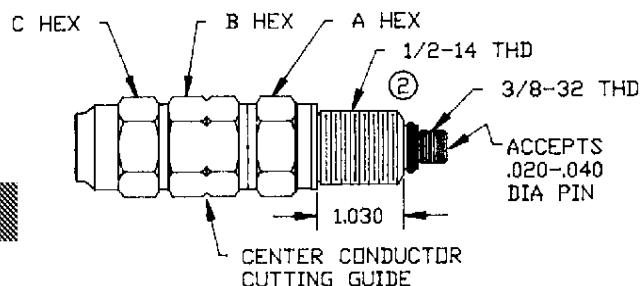

Ⓢ Conduit Nuts Included

Ordering Information — “F” Female Adaptor Bulkhead

PART NUMBER	CABLE GROUP	CENTER COND.	CABLE O.D.	DIMENSION		
				A	B	C
BAI412FFW	A	.080	.412	15/16	15/16	15/16
BAI412FFW2	D	.092	.412	15/16	15/16	15/16
BAI412FFW3	E	.092	.412	15/16	15/16	15/16
BAI412FFSW	B	.092	.412	15/16	15/16	15/16
BAI440FFMC2	I	.105	.450	15/16	15/16	15/16
BAI500FFW	A	.100	.500	1	1	1
BAI500FFW2	D	.111	.500	1	1	1
BAI500FFW3	E	.109	.500	1	1	1
BAI500FFMC2	I	.123	.510	1	1	1
BAI500FFSW	B	.115	.500	1	1	1
BAI540FFQR	H	.124	.610	1-1/8	1-1/8	1-1/8
BAI565FFTX	G	.129	.565	1-1/8	1-1/8	1-1/8
BAI625FFW3	E	.137	.625	1-1/8	1-1/8	1-1/8
BAI650FFMC2	I	.156	.640	1-1/8	1-1/8	1-1/8
BAI700FFTX	G	.163	.703	1-3/16	1-3/16	1-3/16
BAI715FFQR	H	.166	.785	1-1/2	1-1/2	1-1/2
BAI750FFW	A	.148	.750	1-3/16	1-3/16	1-3/16
BAI750FFW2	D	.169	.750	1-3/16	1-3/16	1-3/16
BAI750FFW3	E	.167	.750	1-3/16	1-3/16	1-3/16
BAI750FFMC2	I	.185	.760	1-3/16	1-3/16	1-3/16
BAI750FFSW	B	.173	.750	1-3/16	1-3/16	1-3/16
BAI840FFTX	G	.194	.840	1-1/2	1-1/2	1-1/2
BAI860FFQR	H	.203	.960	1-1/2	1-1/2	1-1/2
BAI875FFW3	E	.194	.875	1-1/2	1-1/2	1-1/2
BAI1000FFW	A	.193	1.000	1-3/4	1-3/4	1-3/4
BAI1000FFW2	D	.225	1.000	1-3/4	1-3/4	1-3/4
BAI1000FFW3	E	.220	1.000	1-3/4	1-3/4	1-3/4
BAI1000FFMC2	I	.248	1.015	1-3/4	1-3/4	1-3/4
BAI1000FFSW	B	.227	1.000	1-3/4	1-3/4	1-3/4
BAI1125FFQR	H	.263	1.225	1-3/4	1-3/4	1-3/4

*See Cable Group Chart on Page 30



Dimensions shown are for reference only. Dimensions are in inches.

Thomas & Betts Corporation/Cable Communications Division Tel: 800-920-0328 / 901-252-5150 • Fax: 800-283-6756 / 901-252-1380

Specifications subject to change.

“K” SERIES TWO PIECE CABLE TO “F” FEMALE ADAPTORS

Cable to “F” Female Adaptor with center conductor seizing mechanism and integral mandrel.

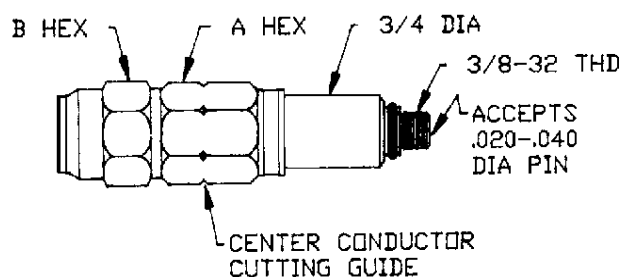

Ordering Information — “F” Female Adaptor

PART NUMBER	CABLE GROUP	CENTER CORD.	CABLE O.D.	DIMENSION	
				A	B
AI412FFK	A	.080	.412	13/16	7/8
AI412FFK3	E,J	.092	.412	13/16	7/8
AI440FFMC2	I	.105	.450	1	1
AI500FFK	A	.100	.500	1	1
AI500FFK3	E,J	.109	.500	1	1
AI500FFMC2	I	.123	.510	1	1
AI500FFQR	H	.117	.580	1	1
AI540FFQR	H	.124	.610	1	1
AI565FFTX	G	.129	.565	1	1
AI625FFK3	E	.137	.625	1	1
AI650FFMC2	I	.156	.640	1-1/8	1-1/8
AI700FFTX	G	.163	.703	1-1/8	1-1/8
AI715FFQR	H	.166	.785	1-3/16	1-3/16
AI750FFK	A	.148	.750	1-1/8	1-1/8
AI750FFK3	E	.167	.750	1-1/8	1-1/8
AI750FFMC2	I	.185	.760	1-1/8	1-1/8
AI840FFTX	G	.194	.840	1-3/8	1-3/8
AI860FFQR	H	.203	.960	1-1/2	1-1/2
AI875FFK3	E	.194	.875	1-3/8	1-3/8
AI1000FFK3	E	.220	1.000	1-1/2	1-1/2
AI1000FFMC2	I	.248	1.015	1-1/2	1-1/2
AI1125FFQR	H	.263	1.225	1-3/4	1-3/4
AI1160FFTX	G	.269	1.160	1-3/4	1-3/4

*See Cable Group Chart on page 30. Patent #4,346,958



Dimensions shown are for reference only. Dimensions are in inches.

Thomas & Betts Corporation/Cable Communications Division Tel: 800-920-0328 / 901-252-5150 • Fax: 800-283-6756 / 901-252-1380

Specifications subject to change.

“W” SERIES THREE PIECE CABLE TO “F” FEMALE ADAPTORS

Cable to “F” Female Adaptor with center conductor seizing mechanism and integral mandrel.

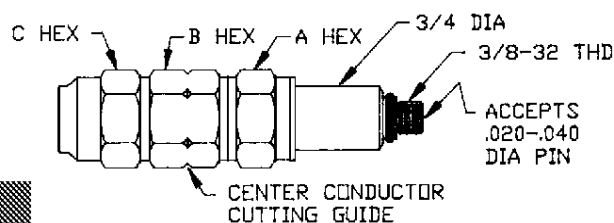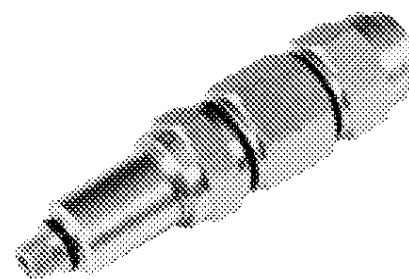

Ordering Information — “F” Female Adaptor

PART NUMBER	CABLE GROUP	CENTER COND.	CABLE OD.	A	B	C
AI412FFW	A	.080	.412	15/16	15/16	15/16
AI412FFW2	D	.092	.412	15/16	15/16	15/16
AI412FFW3	E	.092	.412	15/16	15/16	15/16
AI412FFSW	B	.092	.412	15/16	15/16	15/16
AI440FFWMC2	I	.105	.450	15/16	15/16	15/16
AI500FFW	A	.100	.500	1	1	1
AI500FFW2	D	.111	.500	1	1	1
AI500FFW3	E	.109	.500	1	1	1
AI500FFWMC2	I	.123	.510	1	1	1
AI500FFSW	B	.115	.500	1	1	1
AI540FFWQR	H	.124	.610	1-1/8	1-1/8	1-1/8
AI565FFWTX	G	.129	.565	1-1/8	1-1/8	1-1/8
AI625FFW3	E	.137	.625	1-1/8	1-1/8	1-1/8
AI650FFWMC2	I	.156	.640	1-1/8	1-1/8	1-1/8
AI700FFWTX	G	.163	.703	1-3/16	1-3/16	1-3/16
AI715FFWQR	H	.166	.785	1-1/2	1-1/2	1-1/2
AI750FFW	A	.148	.750	1-3/16	1-3/16	1-3/16
AI750FFW2	D	.169	.750	1-3/16	1-3/16	1-3/16
AI750FFW3	E	.167	.750	1-3/16	1-3/16	1-3/16
AI750FFWMC2	I	.185	.760	1-3/16	1-3/16	1-3/16
AI750FFSW	B	.173	.750	1-3/16	1-3/16	1-3/16
AI840FFWTX	G	.194	.840	1-1/2	1-1/2	1-1/2
AI860FFWQR	H	.203	.960	1-1/2	1-1/2	1-1/2
AI875FFW3	E	.194	.875	1-1/2	1-1/2	1-1/2
AI1000FFW	A	.193	1.000	1-3/4	1-3/4	1-3/4
AI1000FFW2	D	.225	1.000	1-3/4	1-3/4	1-3/4
AI1000FFW3	E	.220	1.000	1-3/4	1-3/4	1-3/4
AI1000FFWMC2	I	.248	1.015	1-3/4	1-3/4	1-3/4
AI1000FFSW	B	.227	1.000	1-3/4	1-3/4	1-3/4
AI1125FFWQR	H	.263	1.225	1-3/4	1-3/4	1-3/4

*See Cable Group Chart on Page 30



Dimensions shown are for reference only. Dimensions are in inches.

Thomas & Betts Corporation/Cable Communications Division Tel: 800-920-0328 / 901-252-5150 • Fax: 800-283-6756 / 901-252-1380

Specifications subject to change.

"K" SERIES TWO PIECE CABLE TO "F" MALE ADAPTORS

Cable to "F" Male Adaptor with center conductor seizing mechanism and integral mandrel.

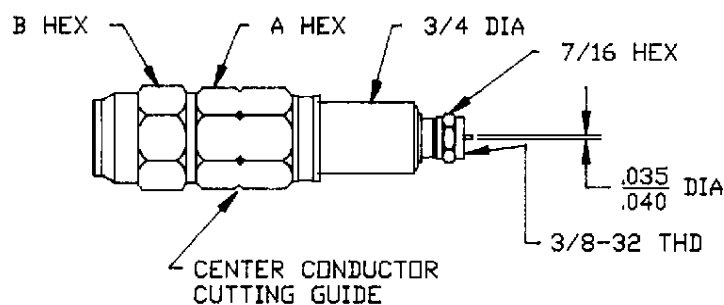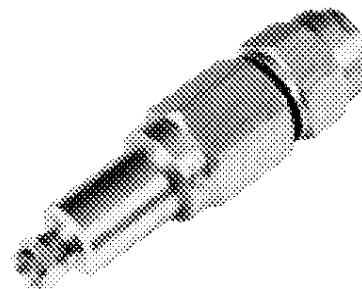

Ordering Information — "F" Male Adaptor



PART NUMBER	CABLE GROUP	CENTER COND.	CABLE O.D.	DIMENSION	
				A	B
AI412FMK	A	.080	.412	13/16	7/8
AI412FMK3	E,J	.092	.412	13/16	7/8
AI440FMMC2	I	.105	.450	1	1
AI500FMK	A	.100	.500	1	1
AI500FMK3	E,J	.109	.500	1	1
AI500FMMC2	I	.123	.510	1	1
AI500FMQR	H	.117	.580	1	1
AI540FMQR	H	.124	.610	1	1
AI565FMTX	G	.129	.565	1	1
AI625FMK3	E	.137	.625	1	1
AI650FMMC2	I	.156	.640	1-1/8	1-1/8
AI700FMTX	G	.163	.703	1-1/8	1-1/8
AI715FMQR	H	.166	.785	1-3/16	1-3/16
AI750FMK	A	.148	.750	1-1/8	1-1/8
AI750FMK3	E	.167	.750	1-1/8	1-1/8
AI750FMMC2	I	.185	.760	1-1/8	1-1/8
AI840FMTX	G	.194	.840	1-3/8	1-3/8
AI860FMQR	H	.203	.960	1-1/2	1-1/2
AI875FMK3	E	.194	.875	1-3/8	1-3/8
AI1000FMK3	E	.220	1.000	1-1/2	1-1/2
AI1000FMMC2	I	.248	1.015	1-1/2	1-1/2
AI1125FMQR	H	.263	1.225	1-3/4	1-3/4
AI1160FMTX	G	.269	1.160	1-3/4	1-3/4

*See Cable Group Chart on Page 30. Patent #4,346,958

Dimensions shown are for reference only. Dimensions are in inches.

"W" SERIES THREE PIECE CABLE TO "F" MALE ADAPTORS

Cable to "F" Male Adaptor with center conductor seizing mechanism and integral mandrel.

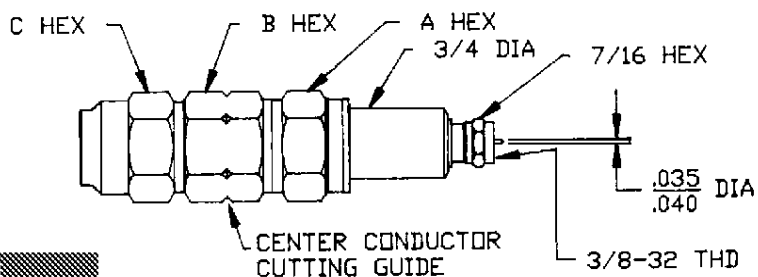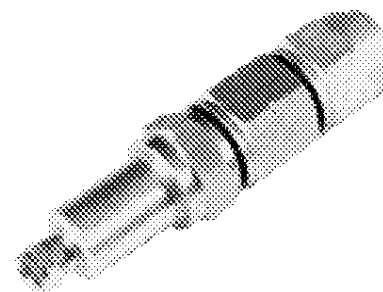

Ordering Information — "F" Male Adaptor

PART NUMBER	CABLE GROUP*	CENTER COND.	CABLE O.D.	DIMENSION		
				A	B	C
AI412FMW	A	.080	.412	15/16	15/16	15/16
AI412FMW2	D	.092	.412	15/16	15/16	15/16
AI412FMW3	E	.092	.412	15/16	15/16	15/16
AI440FMWMC2	I	.105	.450	15/16	15/16	15/16
AI412FMSW	B	.092	.412	15/16	15/16	15/16
AI500FMW	A	.100	.500	1	1	1
AI500FMW2	D	.111	.500	1	1	1
AI500FMW3	E	.109	.500	1	1	1
AI500FMWMC2	I	.123	.510	1	1	1
AI500FMSW	B	.115	.500	1	1	1
AI540FMWQR	H	.124	.610	1-1/8	1-1/8	1-1/8
AI565FMWTX	G	.129	.565	1-1/8	1-1/8	1-1/8
AI625FMW3	E	.137	.625	1-1/8	1-1/8	1-1/8
AI650FMWMC2	I	.156	.640	1-1/8	1-1/8	1-1/8
AI700FMWTX	G	.163	.703	1-3/16	1-3/16	1-3/16
AI715FMWQR	H	.166	.785	1-1/2	1-1/2	1-1/2
AI750FMW	A	.148	.750	1-3/16	1-3/16	1-3/16
AI750FMW2	D	.169	.750	1-3/16	1-3/16	1-3/16
AI750FMW3	E	.167	.750	1-3/16	1-3/16	1-3/16
AI750FMWMC2	I	.185	.760	1-3/16	1-3/16	1-3/16
AI750FMSW	B	.173	.750	1-3/16	1-3/16	1-3/16
AI840FMWTX	G	.194	.840	1-1/2	1-1/2	1-1/2
AI860FMWQR	H	.203	.960	1-1/2	1-1/2	1-1/2
AI875FMW3	E	.194	.875	1-1/2	1-1/2	1-1/2
AI1000FMW	A	.193	1.000	1-3/4	1-3/4	1-3/4
AI1000FMW2	D	.225	1.000	1-3/4	1-3/4	1-3/4
AI1000FMW3	E	.220	1.000	1-3/4	1-3/4	1-3/4
AI1000FMWMC2	I	.248	1.015	1-3/4	1-3/4	1-3/4
AI1000FMSW	B	.227	1.000	1-3/4	1-3/4	1-3/4
AI1125FMWQR	H	.263	1.225	1-3/4	1-3/4	1-3/4

* See Cable Group Chart on Page 30

Dimensions shown are for reference only. Dimensions are in inches.

Thomas & Betts Corporation/Cable Communications Division Tel: 800-920-0328 / 901-252-5150 • Fax: 800-283-6756 / 901-252-1380

Specifications subject to change.