

## Small Form Factor Pluggable Transceiver for 2.125/1.0625Gbd Fiber Channel



### FEATURES

- Compliant with SFP Transceiver MSA specification
- LCP-2125Bxxx compliant with the Fiber Channel 200-SM-LC-L FC-PI Rev.13 as well as 1.0625GBd 100-SM-LC-L FC-PI Rev.13
- LCP-2125Axxx compliant with Fiber Channel FC-PI 200-M5-SN-I Rev.13 as well as 1.0625GBd FC-PI 100-M5-SN-I Rev.13
- Compliant with Industry Standard RFT Electrical Connector and Cage
- Single + 3.3V Power Supply and TTL Logic Interface
- EEPROM with Serial ID Functionality
- Laser Class 1 Product which comply with the requirements of IEC 60825-1 and IEC 60825-2

### Description

The LCP-2125xxxx series is hot pluggable 3.3V Small-Form-Factor transceiver module designed expressly for high-speed communication applications that require rates of up to 2.125Gbit/sec. It is compliant with the Fiber Channel standards, as well as the SFP Multisource Agreement (MSA).

The LCP-2125xxxx transceivers provide with the LC receptacle that is compatible with the industry standard LC connector. The transceiver is also compatible with industry standard RFT connector and cage.

The post-amplifier of the LCP-2125xxxx also includes a Loss Of Signal (LOS) circuit that provides a TTL logic-high output when an unusable optical signal level is detected.

The LCP-2125xxxx transceiver is a Class 1 eye safety product. The optical power levels, under normal operation, are at eye safe level.

### Applications

- Fiber channel
- Switch to Switch interface
- Switched backplane applications
- File server interface

### Performance

- LCP-2125A4ESxx Data Link up to 300m in 50/125 $\mu$ m Multi Mode Fiber
- LCP-2125B4QSxx Data Link up to 10km in 9/125 $\mu$ m Single Mode Fiber

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	Ts	-40		85	°C	
Supply Voltage	VCC	0		5	V	

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Ambient Operating Temperature	TA	0		70	°C	
Supply Voltage	VCC	3.135		3.465	V	

### Electrical Characteristics

(TA=0 °C to 70 °C, VCC=3.135V to 3.465V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Total Supply Current LCP-2125A4xxx LCP-2125B4xxx	ICCT			220 250	mA	
<b>Transmitter</b>						
Transmitter Differential Input Voltage	VDT	0.5		2.4	V	1
Transmitter Disable Input-High	V <sub>DISH</sub>	2		V <sub>CC</sub> +0.3	V	
Transmitter Disable Input-Low	V <sub>DISL</sub>	0		0.8	V	
Transmitter Fault Output-High	V <sub>TXFH</sub>	2		V <sub>CC</sub> +0.3	V	2
Transmitter Fault Output-Low	V <sub>TXFL</sub>	0		0.8	V	2
<b>Receiver</b>						
Receiver Differential Output Voltage	VDR	0.37	0.7	2	V	3
LOS Output Voltage-High	V <sub>LOSH</sub>	2		V <sub>CC</sub> +0.3	V	2
LOS Output Voltage-Low	V <sub>LOSL</sub>	0		0.8	V	2
Output Data rise/fall time	t <sub>r</sub> /t <sub>f</sub>			250	ps	4

#### Notes:

1. Internally AC coupled and terminated to 100Ohm differential load.
2. Pull up to V<sub>CC</sub> with a 4.7K – 10KΩ resistor on host Board
3. Internally AC coupled, but requires a 100 Ohm differential termination at or internal to Serializer/ Deserializer.
4. These are 20%~80% values


**Optical Characteristics (LCP-2125A4ES / LCP-2125A4ESM)**

( $T_A=0\text{ }^{\circ}\text{C}$  to  $70\text{ }^{\circ}\text{C}$ ,  $V_{CC}=3.135\text{V}$  to  $3.465\text{V}$ , Data Rate= $2.125\text{Gb/sec}$ , PRBS= $2^7-1$  NRZ,  $50/125\mu\text{m}$  MMF)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Output Optical Power (Avg.)	$P_o$	-9.5		-4	dBm	
Optical Extinction Ratio		9			dB	
Center Wavelength	$\lambda_c$	830	850	860	nm	
Spectral Width (RMS)	$\sigma$			0.85	nm	
Optical Rise/Fall time	$t_r/t_f$			150	ps	1
Relative Intensity Noise	RIN			-117	dB/Hz	
Output Eye	Complies with the ANSI FC-PI Rev. 13 specification, and is class 1 laser eye safety					
<b>Receiver</b>						
Sensitivity (Avg.)	PIN			-17	dBm	2
Input Optical Wavelength	$\lambda$		850		nm	
LOS-De-asserted (Avg.)	PA			-17	dBm	
LOS-Asserted (Avg.)	PD	-30			dBm	
LOS-Hysteresis	PA-PD	0.5			dB	
Overload	$P_o$	-4			dBm	

**Notes:**

1. These are 20%~80% values
2. The sensitivity is provided at a BER of  $1 \times 10^{-10}$  or better with an input signal consisting of  $2.125\text{Gb/s}$ ,  $2^7-1$  PRBS.

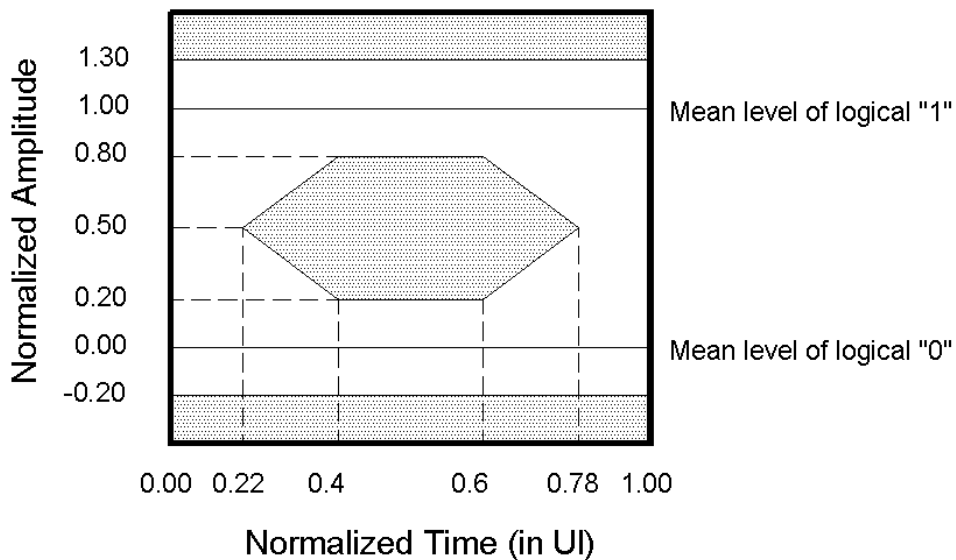

**Transmitter eye Diagram mask**


**Optical Characteristics (LCP-2125B4QS, LCP-2125B4QSM)**

( $T_A=0\text{ }^{\circ}\text{C}$  to  $70\text{ }^{\circ}\text{C}$ ,  $V_{CC}=3.135\text{V}$  to  $3.465\text{V}$ , Data Rate= $2.125\text{Gb/sec}$ , PRBS= $2^7-1$  NRZ,  $9/125\mu\text{m}$  SMF)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Output Optical Power (Avg.)	P <sub>O</sub>	-10		-3	dBm	
Optical Extinction Ratio		9			dB	
Center Wavelength	$\lambda_c$	1270	1310	1355	nm	
Spectral Width	$\sigma$			4	nm	
Optical Rise/ Fall Time	t <sub>r</sub> /t <sub>f</sub>			260	ps	1
Relative Intensity Noise	RIN			-120	dB/Hz	
Output Eye	Complies with the ANSI FC-PI Rev. 13 specification, and is class 1 laser eye safety					
<b>Receiver</b>						
Sensitivity (Avg.)	P <sub>IN</sub>			-17	dBm	1
Input Optical Wavelength	$\lambda$		1310		nm	
LOS- De-asserted (Avg.)	P <sub>A</sub>			-17	dBm	2
LOS- Asserted (Avg.)	P <sub>D</sub>	-30			dBm	2
LOS-Hysteresis	P <sub>A</sub> -P <sub>D</sub>	0.5			dB	
Overload	P <sub>O</sub>	-3			dBm	


**Notes:**

- These are unfiltered 20%~80% values
- The sensitivity is provided at a BER of  $1 \times 10^{-10}$  or better with an input signal consisting of  $2.125\text{Gb/s}$ ,  $2^7-1$  PRBS and ER=9dB.

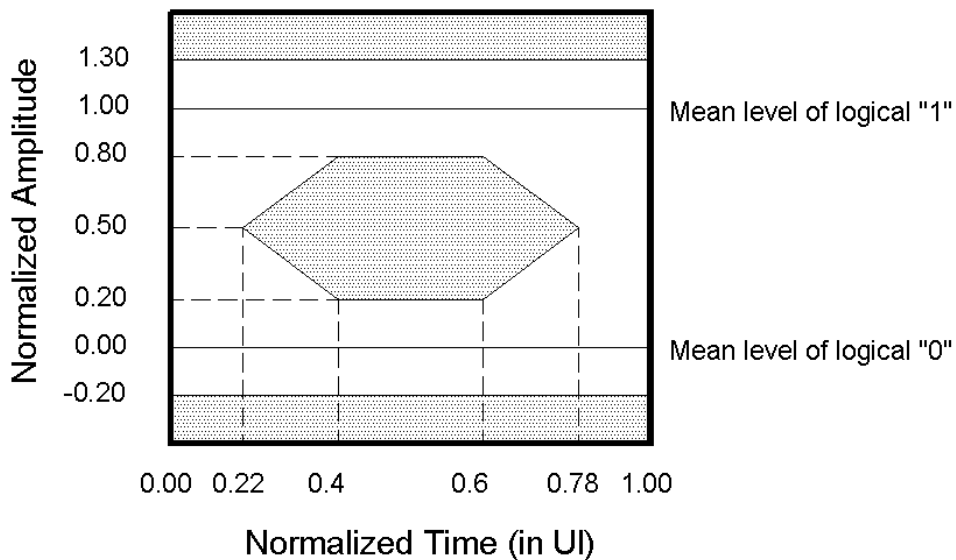

**Transmitter eye Diagram mask**

### SFP Transceiver Electrical Pad Layout

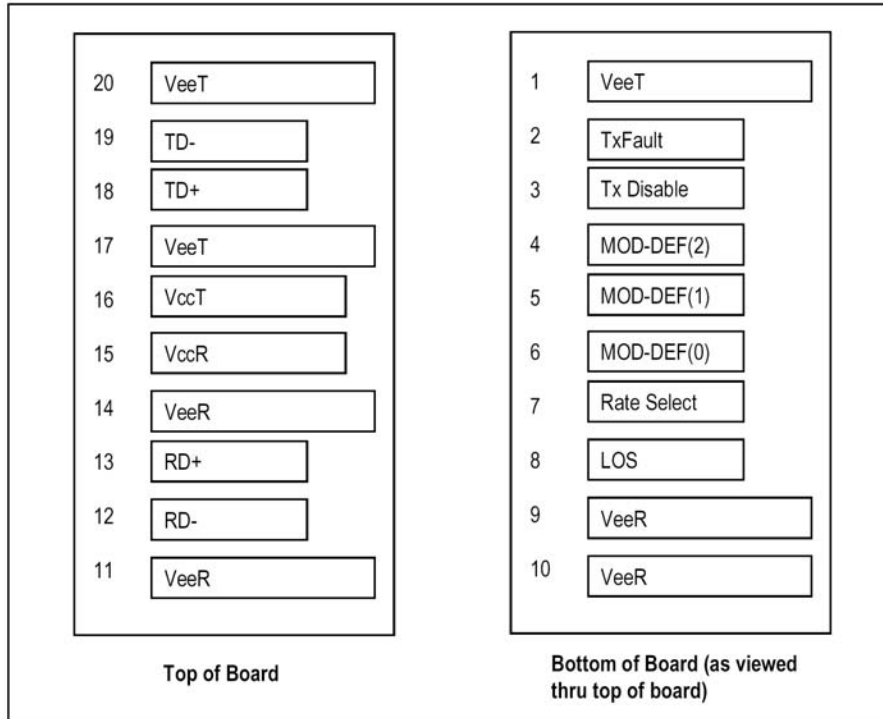

### Pin Function Definitions

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2 Module disables on high or open
4	MOD-DEF2	Module Definition 2	3	Note 3, 2 wire serial ID interface
5	MOD-DEF1	Module Definition 1	3	Note 3, 2 wire serial ID interface
6	MOD-DEF0	Module Definition 0	3	Note 3, Grounded in Module
7	Rate Select	Not Connect	3	Function not available
8	LOS	Loss of Signal	3	Note 4
9	VeeR	Receiver Ground	1	Note 5
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 7
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3 ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5


Plug Seq.: Pin engagement sequence during hot plugging.

**Notes:**

- 1) TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10K $\Omega$  resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10 K  $\Omega$  resistor. Its states are:

Low (0 – 0.8V):	Transmitter on
(>0.8, < 2.0V):	Undefined
High (2.0 – 3.465V):	Transmitter Disabled
Open:	Transmitter Disabled
- 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10K $\Omega$ resistor on the host board. The pull-up voltage shall be VccT or VccR (see Section IV for further details). Mod-Def 0 is grounded by the module to indicate that the module is present Mod-Def 1 is the clock line of two wire serial interface for serial ID Mod-Def 2 is the data line of two wire serial interface for serial ID
- 4) LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10K $\Omega$  resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 5) VeeR and VeeT may be internally connected within the SFP module.
- 6) RD-/+ : These are the differential receiver outputs. They are AC coupled 100 $\Omega$  differential lines which should be terminated with 100 $\Omega$  (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 370 and 2000 mV differential (185 – 1000 mV single ended) when properly terminated.
- 7) VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V  $\pm$ 5% at the SFP connector pin. Maximum supply current is 300mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than  $\bar{1}$ =should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP transceiver module.
- 8) TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 $\Omega$  differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 500 – 2400 mV (250 – 1200 mV single-ended), though it is recommended that values between 500 and 1200 mV differential (250 – 600 mV single-ended) be used for best EMI performance.




Recommend Circuit Schematic

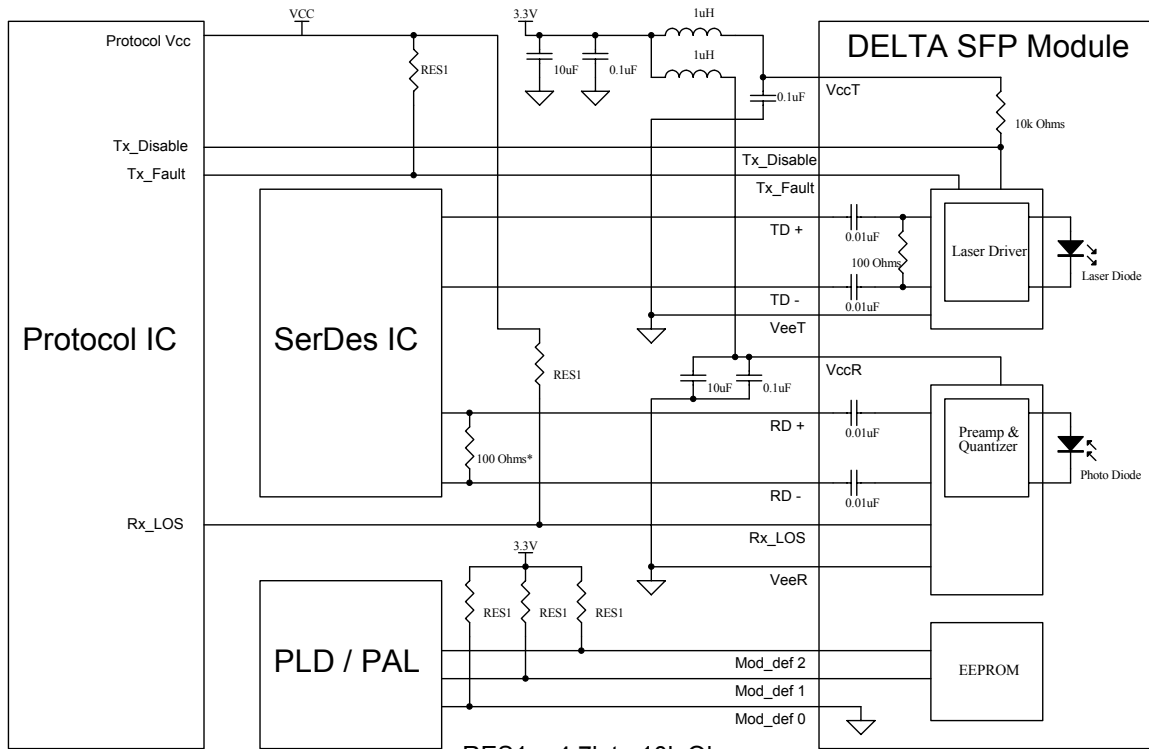

RES1 = 4.7k to 10k Ohms


\* Depends on SerDes IC used

Package Outline Drawing for Plastic Housing with Standard de-latch

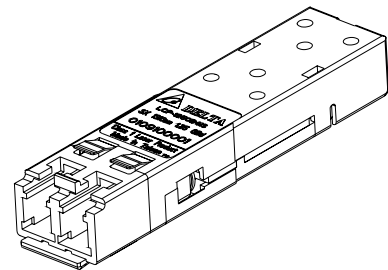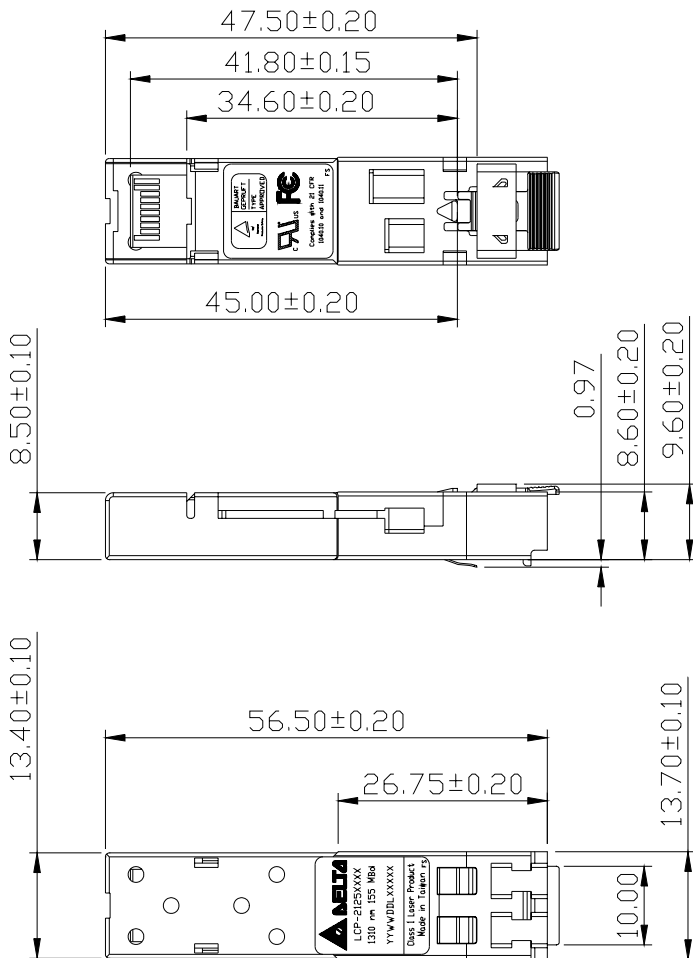

Note:  
Dimension in mm









Package Outline Drawing for Metal Housing with Bail de-latch

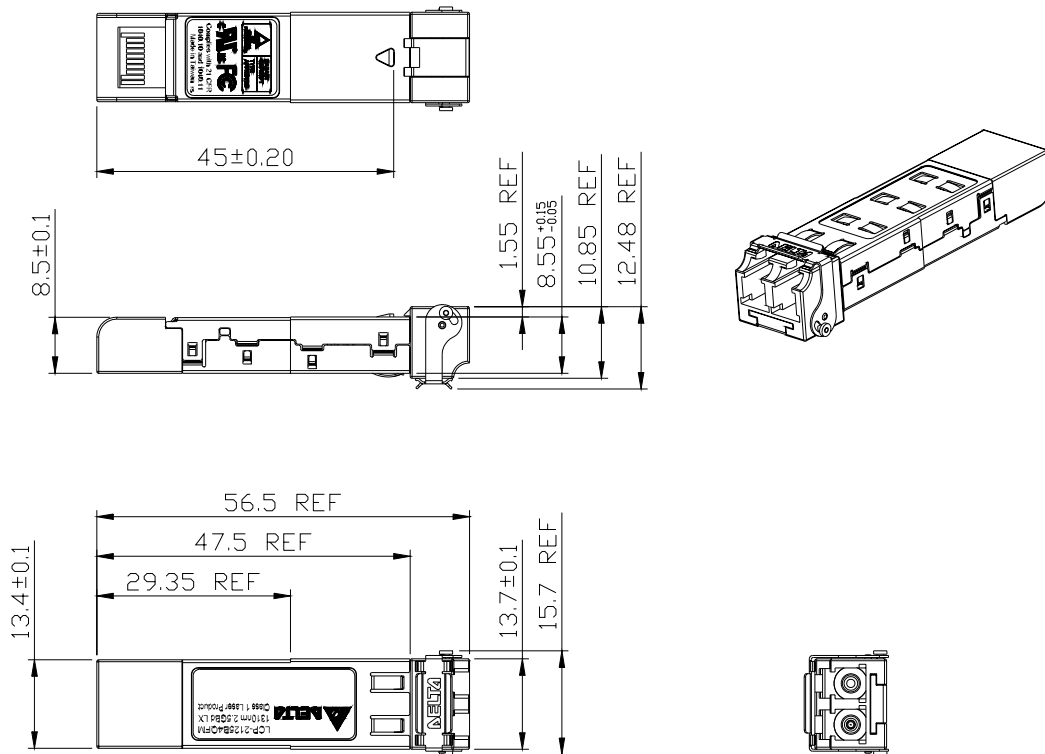

**SFP timing parameters for SFP management**

Parameter	Symbol	Min.	Max.	Unit	Unit Conditions
TX_DISABLE Assert time	t_off		10	μsec	Time from rising edge of TX_DISABLE to when the optical output falls below 10% of nominal
TX_DISABLE Negate time	t_on		1	msec	Time from falling edge of TX_DISABLE to when the modulated optical output rises above 90% of nominal
Time to initialize, including reset of TX_FAULT	t_init		300	msec	From power on or negation of TX_Fault using TX Disable.
TX Fault Assert Time	t_fault		100	μsec	Time from fault to TX fault on.
TX_DISABLE to reset	t_rest	10		μsec	Time TX Disable must be held high to reset TX_Fault
LOS Assert Time	t_loss_on		100	μsec	Time from LOS state to Rx LOS assert
LOS Deassert Time	t_loss_off		100	μsec	Time from non-LOS state to Rx LOS deassert
Serial ID Clock Rate	f_serial_clock		100	kHz	

SFP timing parameters:

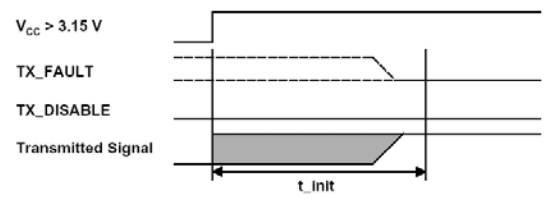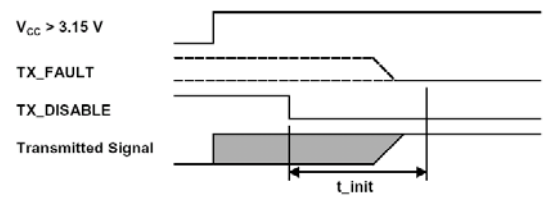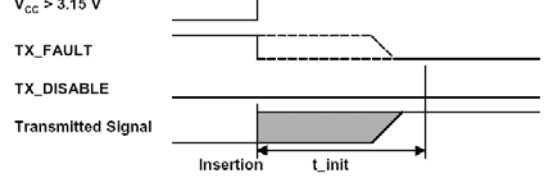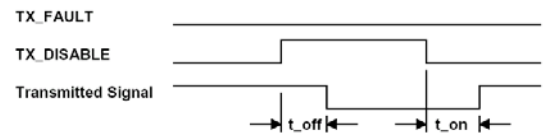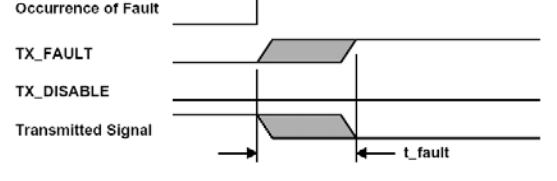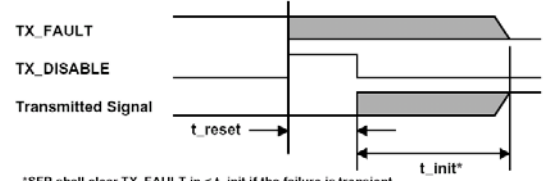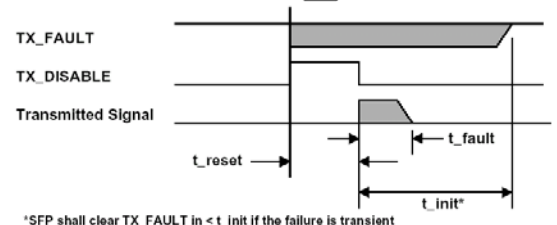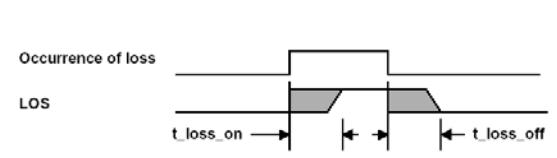 <p><math>V_{CC} &gt; 3.15\text{ V}</math> TX_FAULT TX_DISABLE Transmitted Signal <math>t_{init}</math></p>	 <p><math>V_{CC} &gt; 3.15\text{ V}</math> TX_FAULT TX_DISABLE Transmitted Signal <math>t_{init}</math></p>
<p>Power on initialization of SFP transceiver, TX_DISABLE negated</p>	<p>Power on initialization of SFP, TX_DISABLE asserted</p>
 <p><math>V_{CC} &gt; 3.15\text{ V}</math> TX_FAULT TX_DISABLE Transmitted Signal Insertion <math>t_{init}</math></p>	 <p>TX_FAULT TX_DISABLE Transmitted Signal <math>t_{off}</math> <math>t_{on}</math></p>
<p>Example of initialization during hot plugging, TX_DISABLE negated.</p>	<p>SFP TX_DISABLE timing during normal operation.</p>
 <p>Occurrence of Fault TX_FAULT TX_DISABLE Transmitted Signal <math>t_{fault}</math></p>	 <p>Occurrence of Fault TX_FAULT TX_DISABLE Transmitted Signal <math>t_{reset}</math> <math>t_{init}^*</math></p> <p><small>*SFP shall clear TX_FAULT in <math>&lt; t_{init}</math> if the failure is transient</small></p>
<p>Detection of transmitter safety fault condition</p>	<p>Successful recovery from transient safety fault condition</p>
 <p>Occurrence of Fault TX_FAULT TX_DISABLE Transmitted Signal <math>t_{reset}</math> <math>t_{fault}</math> <math>t_{init}^*</math></p> <p><small>*SFP shall clear TX_FAULT in <math>&lt; t_{init}</math> if the failure is transient</small></p>	 <p>Occurrence of loss LOS <math>t_{loss\_on}</math> <math>t_{loss\_off}</math></p>
<p>Unsuccessful recovery from safety fault condition</p>	<p>Timing of LOS detection</p>



**LCP-2125A4ES EEPROM Serial ID Memory Contents (2-Wire Address A0h)**

Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII
00	03		25	20		50	45	E	75	SN		100	00		125	00	
01	04		26	20		51	53	S	76	SN		101	00		126	00	
02	07		27	20		52	20		77	SN		102	00		127	00	
03	00		28	20		53	20		78	SN		103	00				
04	00		29	20		54	20		79	SN		104	00				
05	00		30	20		55	20		80	SN		105	00				
06	01		31	20		56	30		81	SN		106	00				
07	20		32	20		57	30		82	SN		107	00				
08	40		33	20		58	30		83	SN		108	00				
09	0C		34	20		59	30		84	DC	Note 3	109	00				
10	05		35	20		60	03		85	DC		110	00				
11	01		36	00		61	52		86	DC		111	00				
12	15		37	00		62	00		87	DC		112	00				
13	00		38	00		63	05	Note 1	88	DC		113	00				
14	00		39	00		64	00		89	DC		114	00				
15	00		40	4C	L	65	1A		90	DC		115	00				
16	1E		41	43	C	66	05		91	DC		116	00				
17	0F		42	50	P	67	05		92	00		117	00				
18	00		43	2D	-	68	SN	Note 2	93	00		118	00				
19	00		44	32	2	69	SN		94	00		119	00				
20	44	D	45	31	1	70	SN		95	CS2	Note 4	120	00				
21	45	E	46	32	2	71	SN		96	00		121	00				
22	4C	L	47	35	5	72	SN		97	00		122	00				
23	54	T	48	41	A	73	SN		98	00		123	00				
24	41	A	49	34	4	74	SN		99	00		124	00				

**LCP-2125B4QSM EEPROM Serial ID Memory Contents (2-Wire Address A0h)**

Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII	Address	Hex	ASCII
00	03		25	20		50	51	Q	75	SN		100	00		125	00	
01	04		26	20		51	53	S	76	SN		101	00		126	00	
02	07		27	20		52	4D	M	77	SN		102	00		127	00	
03	00		28	20		53	20		78	SN		103	00				
04	00		29	20		54	20		79	SN		104	00				
05	00		30	20		55	20		80	SN		105	00				
06	02		31	20		56	30		81	SN		106	00				
07	12		32	20		57	30		82	SN		107	00				
08	00		33	20		58	30		83	SN		108	00				
09	01		34	20		59	30		84	DC	Note 3	109	00				
10	05		35	20		60	05		85	DC		110	00				
11	01		36	00		61	1E		86	DC		111	00				
12	15		37	00		62	00		87	DC		112	00				
13	00		38	00		63	F6	Note 1	88	DC		113	00				
14	0A		39	00		64	00		89	DC		114	00				
15	64		40	4C	L	65	1A		90	DC		115	00				
16	00		41	43	C	66	05		91	DC		116	00				
17	00		42	50	P	67	05		92	00		117	00				
18	00		43	2D	-	68	SN	Note 2	93	00		118	00				
19	00		44	32	2	69	SN		94	00		119	00				
20	44	D	45	31	1	70	SN		95	CS2	Note 4	120	00				
21	45	E	46	32	2	71	SN		96	00		121	00				
22	4C	L	47	35	5	72	SN		97	00		122	00				
23	54	T	48	42	B	73	SN		98	00		123	00				
24	41	A	49	34	4	74	SN		99	00		124	00				

**Notes:**

- 1) Byte 63: Check sum of bytes 0-62.
- 2) Byte 68-83 (SN): Serial number.
- 3) Byte 84-91 (DC): Date code.
- 4) Byte 95 (CS2): Check sum of bytes 64-94



**Regulatory Compliance**

Feature	Reference	Performance
Electromagnetic Interference (EMI)	FCC Class B EN 55022 Class B (CISPR 22A)	(1) Satisfied with electrical characteristics of product spec.  (2) No physical damage
Radio Frequency Electromagnetic Field	EN 61000-4-3 IEC 1000-4-3	
Electrostatic Discharge to the Duplex LC Receptacle	EN 61000-4-2 IEC 1000-4-2 IEC 801.2	
Electrostatic Discharge to the Electrical Pins	MIL-STD-883E Method 3015.7	
Eye Safety	US FDA CDRH AEL Class 1 EN 60950: 2000 EN 60825-1: 1994+A11+A2 EN 60825-2: 2000	CDRH File # 0321539-00 TUV Certificate No. R50032471
Component Recognition	Underwriters Laboratories and Canadian Standards Association Joint Component Recognition for Information Technology Equipment Including Electrical Business Equipment	UL File # E239394

## Ordering information for SFP modules

LCP-2125X<sub>1</sub>X<sub>2</sub>X<sub>3</sub>X<sub>4</sub>X<sub>5</sub>X<sub>6</sub>

**X<sub>1</sub>: Fiber**

**A:** Multi-mode 850nm  
**B:** Single-mode 1310nm

**X<sub>2</sub>: Power Supply Voltage and SD Level**

**4:** 3.3V, TTL SD Level

**X<sub>3</sub>: Distance**

**E:** 300m (Multimode 850nm)  
**Q:** 10km (Single Mode 1310nm)

**X<sub>4</sub>: Digital Diagnostic Function**

**S:** Standard, without digital diagnostic function  
**D:** Deluxe, with digital diagnostic function  
**Others:** Customized

**X<sub>5</sub>: Housing Type**

**Blank:** Plastic housing with standard de-latch  
**M:** Metal housing with Bail de-latch

**X<sub>6</sub>: Temperature**

**Blank:** 0 to +70 degree C  
**T:** -40 to +85 degree C  
*(Only for Single-mode 1310nm)*  
**H:** -10 to +85 degree C  
*(Only for Single-mode 1310nm)*

## Related Products

- LCP-155xxxx: 155Mb/s, Multimode and single mode transceiver from 2km to 40km
- LCP-1250xxxx: 1.25Gb/s, Multimode and single mode transceiver from 500m to 10km
- LCP-2488xxxx: 2.5Gb/s, multimode and single mode transceiver from 300m to 15km