

SMJ320C30KGDB FLOATING-POINT DIGITAL SIGNAL PROCESSOR KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

- **Military Operating Temperature Range**
–55°C to 125°C, QML Processing
- **Fast Instruction Cycle Time of 50 ns and 40 ns**
- **Two 1K-Word × 32-Bit Single-Cycle Dual-Access On-Chip RAM Blocks**
- **32-Bit Instruction and Data Words, 24-Bit Addresses**
- **Integer, Floating-Point, and Logical Operations**
- **40- or 32-Bit Floating-Point/Integer Multiplier and Arithmetic Logic Unit (ALU)**
- **24 × 24-Bit Integer Multiplier, 32-Bit Product**
- **32 × 32-Bit Floating-Point Multiplier, 40-Bit Product**
- **Parallel ALU and Multiplier Execution in a Single Cycle**
- **32-Bit Barrel Shifter**
- **Eight Extended-Precision Registers (Accumulators)**
- **Circular and Bit-Reversed Addressing Capabilities**
- **Two Independent Bidirectional Serial Ports With Support for 8-, 16-, 24-, or 32-Bit Transfers**
- **Two 32-Bit Timers With Control and Counter Registers**
- **Validated Ada Compiler**
- **64-Word × 32-Bit Instruction Cache**
- **On-Chip Direct Memory Access (DMA) Controller for Concurrent I/O and CPU Operation**
- **One 4K × 32-Bit Single-Cycle Dual-Access On-Chip ROM Block**
- **Two 32-Bit External Ports (24- and 13-Bit Addresses)**
- **Two Address Generators With Eight Auxiliary Registers and Two Auxiliary Register Arithmetic Units (ARAUs)**
- **Zero-Overhead Loops With Single-Cycle Branches**
- **Interlocked Instructions for Multiprocessing Support**
- **Two- and Three-Operand Instructions**
- **Conditional Calls and Returns**
- **Block-Repeat Capability**
- **Fabricated Using Enhanced Performance Implanted CMOS (EPIC™) Technology by Texas Instruments**

description

The SMJ320C30KGDB digital signal processor (DSP) is a high-performance, 32-bit floating-point processor manufactured in 0.72- μ m, double-level metal CMOS technology.

The SMJ320C30KGDB internal busing and special digital-signal-processing instruction set have the speed and flexibility to execute up to 50 million floating-point operations per second (MFLOPS). The SMJ320C30KGDB optimizes speed by implementing functions in hardware that other processors implement through software or microcode. This hardware-intensive approach provides performance previously unavailable on a single chip.

The SMJ320C30KGDB can perform parallel multiply and ALU operations on integer or floating-point data in a single cycle. Each processor also possesses a general-purpose register file, a program cache, dedicated ARAUs, internal dual-access memories, one DMA channel supporting concurrent I/O, and a short machine-cycle time. High performance and ease of use are results of these features.

The large address space, multiprocessor interface, internally and externally generated wait states, two external interface ports, two timers, two serial ports, and multiple interrupt structure enhanced general-purpose applications. The SMJ320C30KGDB supports a wide variety of system applications from host processor to dedicated coprocessor.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 2007, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

SMJ320C30KGDB FLOATING-POINT DIGITAL SIGNAL PROCESSOR KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

description (Continued)

High-level language support is easily implemented through a register-based architecture, large address space, powerful addressing modes, flexible instruction set, and well-supported floating-point arithmetic.

For additional information when designing for cold temperature operation, please see Texas Instruments application report *320C3x, 320C4x and 320MCM42x Power-up Sensitivity at Cold Temperature*, literature number SGUA001.

known good die (KGD) technology

KGD options are available for use in multichip modules and chip-on-board (COB) applications. The current verification technology that supports KGD requirements for the SMJ320C30KGDB is a hot chuck probe process. This process uses standard probed product that is tested in wafer form at speed and elevated temperature to full data sheet specifications. Each individual die is then sawed, inspected, and packaged for shipment.

electrical specifications

For electrical and timing specifications, see the *SMJ320C30 Digital Signal Processor* data sheet, literature number SGUS014.

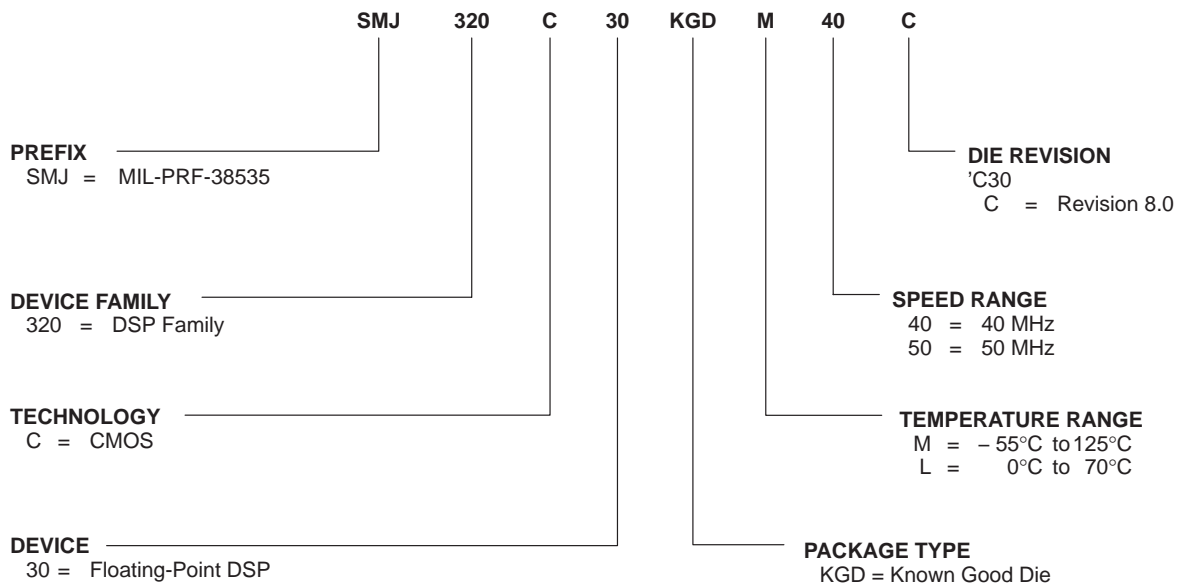


Figure 1. SMJ320C30KGDB Device Nomenclature

JEDEC STANDARD


- Die thickness is approximately 15 mils \pm 1 mil.
- Backside surface finish is silicon.
- Maximum allowable die junction operating temperature is 175°C.
- Glassivation material is compressive nitride.
- Bond pad metal is composed of copper-doped aluminum.
- Percent defective allowed for burned-in die is 5%.
- Life test data is available.
- Configuration control notification
- Group A attribute summary is available (SMJ only).
- Suggested die-attach material is Silverglass (QMI 3555).
- Suggested bond wire size is 1.25 mil.
- ESD rating is Class II.
- Minimum allowable peak process temperature for die attach is 325°C (for QMI 3555).
- Saw kerf is dependent on blade size used.
- Die backside potential is grounded.

**SMJ320C30KGDB
 FLOATING-POINT DIGITAL SIGNAL PROCESSOR
 KNOWN GOOD DIE**

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

SMJ320C30KGDB (rev 7.x) known good die pad information

Figure 2 shows the SMJ320C30KGDB die-numbering format. See Table 1 for SMJ320C30KGDB die pad information.

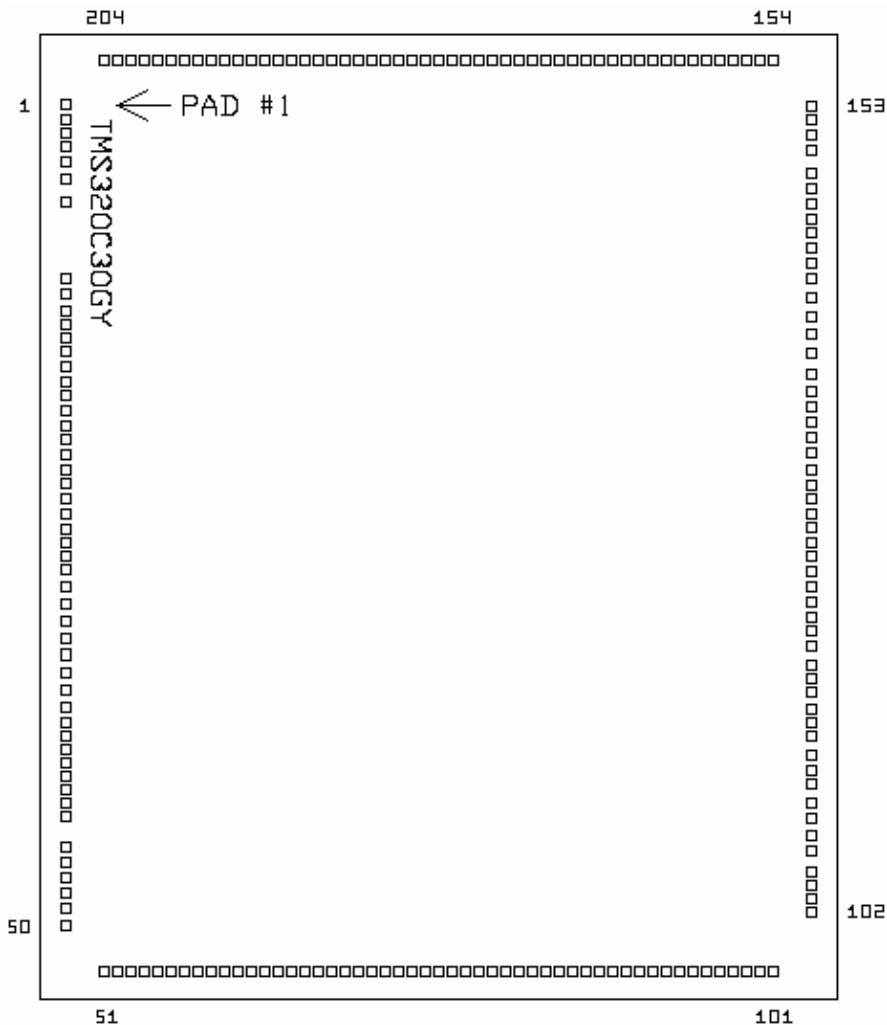

**Figure 2. '320C30KGD Die-Numbering Format
 (See Table 1)**

Table 1 provides a reference for the following:

- The 'C30 signal identities in relation to the pad numbers
- The 'C30 X,Y coordinates, where bond pad 52 serves as the origin (0,0)

In addition, significant specifications include:

- X,Y coordinate data is in microns.
- Coordinate origin is at (0,0) (center of bond pad 52).
- The active silicon dimensions are 7779.60 μm × 9453.10 μm (306.28 mils × 372.17 mils).
- The die size is approximately 7950.20 μm × 9779.00 μm (313.00 mils × 385.00 mils).
- Bond pad dimensions are 103.50 μm × 103.50 μm (4.07 mils × 4.07 mils).



SMJ320C30KGDB
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

Table 1. 320C30KGD Die Pad Information

PAD	NAME	X-COORDINATE	Y-COORDINATE	PAD PITCH
1	DVSS		617.99	127
2	VSS		745.13	124
3	VSS		869.15	117
4	VSS		986.15	139
5	X2/CLKIN		1125.31	147
6	X1		1272.26	205
7	VSUBS		1476.77	669
8	EMU5		2146.17	137
9	XRDY		2283.29	137
10	MSTRB		2420.42	117
11	IOSTRB		2537.42	117
12	XR/W		2654.42	117
13	HOLDA		2771.42	137
14	HOLD		2908.54	137
15	DVDD		3045.67	117
16	DVDD		3162.67	137
17	RDY		3299.79	137
18	STRB		3436.91	117
19	R/W		3553.91	137
20	RESET		3691.04	137
21	XF1		3828.16	117
22	XF0		3945.16	117
23	IACK		4062.16	137
24	INT0		4199.29	137
25	VDD	6778.43	4336.41	117
26	VDD		4453.41	121
27	VSS		4574.47	125
28	VSS		4699.42	139
29	INT1		4838.57	150
30	INT2		4988.49	157
31	INT3		5145.74	150
32	RSV0		5295.34	150
33	RSV1		5444.95	150
34	RSV2		5594.55	150
35	RSV3		5744.15	150
36	RSV4		5893.76	143
37	RSV5		6037.12	117
38	RSV6		6154.12	117
39	RSV7		6271.12	117
40	RSV8		6388.12	117
41	RSV9		6505.12	117
42	RSV10		6622.12	117
43	DR1		6739.12	117
44	FSR1		6856.12	273
45	CLKR1		7129.12	136
46	CLKX1		7264.84	136
47	FSX1		7400.56	136
48	DX1		7536.28	136
49	VSS		7672.00	136
50	VSS		7807.88	



SMJ320C30KGDB
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

Table 1. 320C30KGD Die Pad Information (Continued)

PAD	NAME	X-COORDINATE	Y-COORDINATE	PAD PITCH
51	DVDD	6437.26		117
52	DVDD	6320.26		117
53	DR0	6203.26		117
54	FSR0	6086.26		117
55	CLKR0	5969.26		117
56	CLKX0	5852.26		117
57	FSX0	5735.26		117
58	DX0	5618.26		117
59	TCLK0	5501.26		117
60	TCLK1	5384.26		117
61	EMU6	5267.26		123
62	XD0	5144.02		117
63	XD1	5027.02		117
64	XD2	4910.02		117
65	DVDD	4793.02		117
66	DVDD	4676.02		117
67	XD3	4559.02		117
68	XD4	4442.02		117
69	XD5	4325.02		117
70	XD6	4208.02		117
71	XD7	4091.02		117
72	XD8	3974.02		117
73	XD9	3857.02		117
74	XD10	3740.02		117
75	VDD	3623.02		117
76	VDD	3506.02	8228.77	121
77	DVSS	3385.43		121
78	VSS	3264.07		117
79	VSS	3147.07		117
80	XD11	3030.07		117
81	XD12	2913.07		117
82	XD13	2796.07		117
83	XD14	2679.07		117
84	XD15	2562.07		117
85	XD16	2445.07		117
86	XD17	2328.07		117
87	XD18	2211.07		117
88	XD19	2094.07		117
89	XD20	1977.07		117
90	XD21	1860.07		117
91	XD22	1743.07		117
92	XD23	1626.07		117
93	XD24	1509.07		117
94	XD25	1392.07		117
95	XD26	1275.07		117
96	XD27	1158.07		117
97	XD28	1041.07		117
98	XD29	924.07		117
99	XD30	807.07		121
100	DVDD	686.17		117
101	DVDD	569.17		342
102	VSS	227.21		



SMJ320C30KGDB
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

Table 1. 320C30KGD Die Pad Information (Continued)

PAD	NAME	X-COORDINATE	Y-COORDINATE	PAD PITCH
103	VSS		7575.75	117
104	VSS		7458.59	117
105	VSS		7341.59	173
106	XD31		7168.43	142
107	A23		7026.47	148
108	A22		6878.27	129
109	A21		6748.79	217
110	A20		6531.95	117
111	A19		6414.95	117
112	A18		6297.95	148
113	A17		6149.75	117
114	A16		6032.75	117
115	A15		5915.75	148
116	A14		5767.55	117
117	DVDD		5650.55	117
118	DVDD		5533.55	167
119	A13		5366.63	129
120	A12		5237.15	129
121	A11		5107.67	129
122	A10		4978.19	129
123	A9		4848.71	129
124	A8		4719.23	142
125	A7		4577.27	117
126	A6		4460.27	142
127	VDD		4318.31	117
128	VDD	227.21	4201.31	125
129	DVSS		4076.05	125
130	VSS		3950.78	138
131	A5		3813.03	136
132	A4		3677.15	136
133	A3		3541.43	136
134	A2		3405.71	136
135	A1		3269.99	136
136	A0		3134.27	156
137	EMU0		2978.43	176
138	EMU1		2802.46	176
139	EMU2		2626.49	156
140	EMU3		2470.65	156
141	EMU4/SHZ		2314.81	176
142	MC/MP		2138.84	137
143	XA12		2001.71	129
144	XA11		1872.23	129
145	XA10		1742.75	129
146	XA9		1613.27	129
147	XA8		1483.79	129
148	XA7		1354.31	129
149	XA6		1224.83	211
150	VSS		1014.23	129
151	VSS		884.75	129
152	VSS		755.27	130
153	VSS		625.48	625



SMJ320C30KGDB
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIE

SGUS019D – NOVEMBER 1995 – REVISED JANUARY 2007

Table 1. 320C30KGD Die Pad Information (Continued)

PAD	NAME	X-COORDINATE	Y-COORDINATE	PAD PITCH
154	DVDD	569.17		117
155	DVDD	686.17		117
156	XA5	803.17		117
157	XA4	920.17		117
158	XA3	1037.17		117
159	XA2	1154.17		117
160	XA1	1271.17		117
161	XA0	1388.17		123
162	D31	1511.41		117
163	D30	1628.41		117
164	D29	1745.41		117
165	D28	1862.41		117
166	D27	1979.41		117
167	D26	2096.41		117
168	DVDD	2213.41		117
169	DVDD	2330.41		117
170	D25	2447.41		117
171	D24	2564.41		117
172	D23	2681.41		117
173	D22	2798.41		117
174	D21	2915.41		117
175	D20	3032.41		117
176	D19	3149.41		117
177	D18	3266.41		117
178	VDD	3383.41		117
179	VDD	3500.41	227.21	118
180	DVSS	3618.50		124
181	VSS	3742.21		117
182	VSS	3859.21		117
183	D17	3976.21		117
184	D16	4093.21		117
185	D15	4210.21		117
186	D14	4327.21		117
187	D13	4444.21		117
188	D12	4561.21		117
189	D11	4678.21		117
190	D10	4795.21		117
191	D9	4912.21		117
192	D8	5029.21		117
193	D7	5146.21		117
194	D6	5263.21		117
195	D5	5380.21		117
196	D4	5497.21		117
197	D3	5614.21		117
198	D2	5731.21		117
199	D1	5848.21		117
200	D0	5965.21		117
201	H1	6082.21		117
202	H3	6199.21		117
203	DVDD	6316.21		117
204	DVDD	6433.21		117



PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9052604Q9B	ACTIVE	XCEPT	KGD	0	36	TBD	Call TI	N / A for Pkg Type	-55 to 125		Samples
5962-9052605Q9B	OBSOLETE	XCEPT	KGD	0		TBD	Call TI	Call TI	-55 to 125		
SMJ320C30KGDM40C	ACTIVE	XCEPT	KGD	0	36	TBD	Call TI	N / A for Pkg Type	-55 to 125		Samples
SMJ320C30KGDM50C	OBSOLETE	XCEPT	KGD	0		TBD	Call TI	Call TI	-55 to 125		

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com