

## 5534/5534A Low-Noise Op Amps

### Product Specification

#### Military Linear Products

#### DESCRIPTION


The 5534 is a high-performance low-noise operational amplifier. Compared to other operational amplifiers, such as TL083, it shows better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

The op amps are internally compensated for again equal to, or higher than, three. The frequency response can be optimized with an external compensation capacitor for various applications (unity gain amplifier, capacitive load, slew rate, low overshoot, etc.). If very low noise is of prime importance, it is recommended that the 5534A version be used which has guaranteed noise specifications.

#### FEATURES

- Small-signal bandwidth: 10MHz
- Output drive capability: 600Ω, 10V<sub>RMS</sub> at V<sub>S</sub> = ±18V
- Input noise voltage: 4nV/√Hz
- DC voltage gain: 100000
- AC voltage gain: 6000 at 10kHz
- Power bandwidth: 200kHz
- Slew rate: 13V/μs
- Large supply voltage range: ±3 to ±20V


#### PIN CONFIGURATION

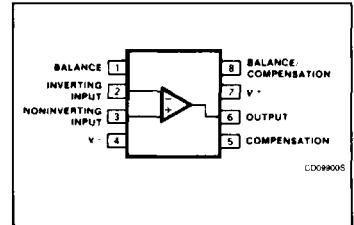

#### ORDERING INFORMATION

DESCRIPTION	ORDER CODE
8-Pin Ceramic DIP	5534/BCA
8-Pin Ceramic DIP	5534A/BCA

#### EQUIVALENT SCHEMATIC

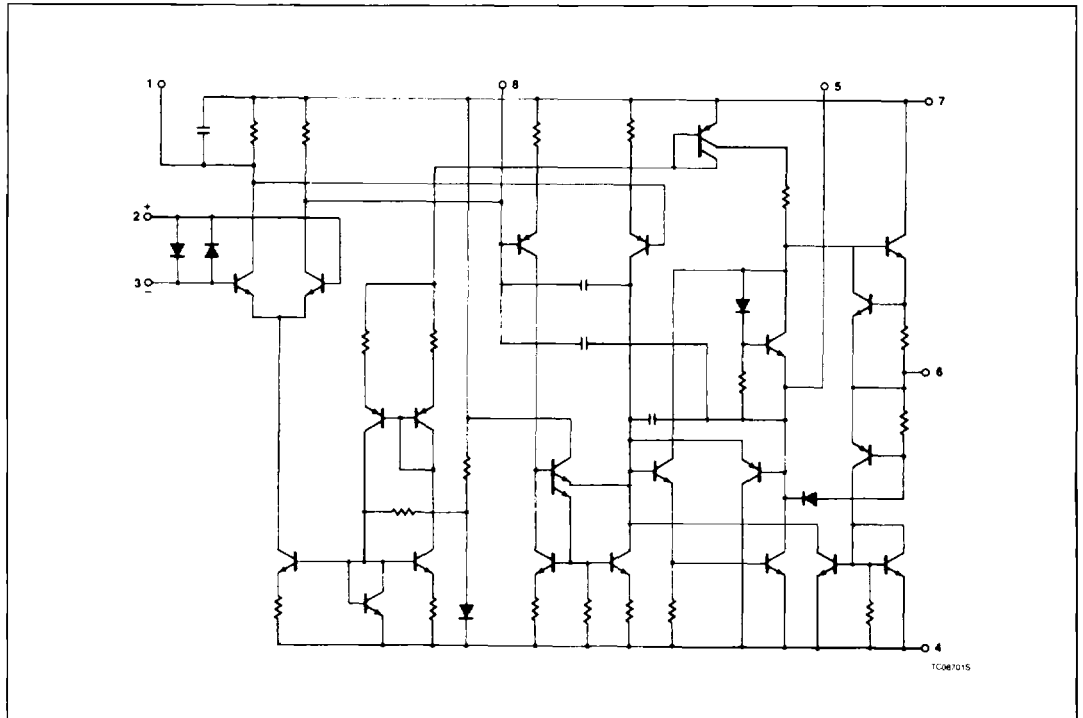

## Low-Noise Op Amp

5534/5534A

## ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING <sup>2</sup>	UNIT
V <sub>S</sub>	Supply voltage	±22	V
V <sub>IN</sub>	Input voltage	± V supply	V
V <sub>DIFF</sub>	Differential input voltage <sup>1</sup>	±0.5	V
T <sub>STG</sub>	Storage temperature range	-65 to +150	°C
T <sub>J</sub>	Junction temperature	150	°C
P <sub>D</sub>	Power dissipation at 25 °C	800	mW

DC ELECTRICAL CHARACTERISTICS V<sub>S</sub> = ± 15V, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	T <sub>A</sub> = +25°C			T <sub>A</sub> = -55°C, +125°C			UNIT
			Min	Typ	Max	Min	Typ	Max	
V <sub>IO</sub>	Input offset voltage			0.5	2.0			3	mV
I <sub>IO</sub>	Input offset current			10	200			500	nA
I <sub>B</sub>	Input bias current			400	800			1500	nA
V <sub>ICR</sub> CMRR PSRR	Common mode voltage range Input mode rejection ratio Power supply rejection ratio	R <sub>S</sub> = 10kΩ	±12 80	±13 100 10		±12 70		100	V dB μV/V
A <sub>V</sub>	Large signal voltage gain	R <sub>L</sub> ≥ 600Ω, V <sub>O</sub> = ±10V	50	100		25			V/mV
V <sub>O</sub>	Output voltage swing	R <sub>L</sub> ≥ 600Ω, R <sub>L</sub> ≥ 600Ω, V <sub>S</sub> = ±18V R <sub>L</sub> ≥ 2kΩ, V <sub>S</sub> = ±15V	±12 ±15 ±13	±13 ±16 ±13.5		±10  ±12			V V V
R <sub>I</sub>	Input resistance <sup>3</sup>		50	100					kΩ
I <sub>SC</sub>	Output short-circuit current			38					mA
I <sub>CC</sub>	Supply current			4	6.5			9	mA

## Low-Noise Op Amp

5534/5534A

AC ELECTRICAL CHARACTERISTICS  $V_S = \pm 15V$ , unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	$T_A = +25^\circ C$			$T_A = -55^\circ C, +125^\circ C$			UNIT
			Min	Typ	Max	Min	Typ	Max	
$R_{OUT}$	Output resistance	$A_V = 30dB$ closed loop $f = 10kHz$ , $R_L = 600\Omega$ $C_C = 22pF$		0.3					$\Omega$
$t_r$ OS	Transient response Rise time Overshoot	Voltage follower, $R_L = 600\Omega$ , $C_C = 22pF$ , $C_L = 100pF$ , $V_I = 50mV$		20 20					ns %
$t_r$ OS	Transient response Rise time Overshoot	$V_{IN} = 50mV$ , $R_L = 600\Omega$ $C_C = 47pF$ , $C_L = 500pF$		50 35					ns %
AC	Gain	$f = 10kHz$ , $C_C = 0$ $f = 10kHz$ , $C_C = 22pF$		6 2.2					V/mV V/mV
GBW	Gain bandwidth product	$C_C = 22pF$ , $C_L = 100pF$		10					mHz
SR	Slew rate <sup>3</sup>	$C_C = 0$ $C_C = 22pF$	4	13 6					$V/\mu S$ V/mus
PBW	Power bandwidth	$V_{OUT} = \pm 10V$ , $C_C = 0$ $V_{OUT} = \pm 10V$ , $C_C = 22pF$ $V_{OUT} = \pm 14V$ , $R_L = 600\Omega$ $C_C = 22pF$ , $V_{CC} = \pm 18V$		200 95 70					kHz kHz kHz

ELECTRICAL CHARACTERISTICS  $T_A = 25^\circ C$ ,  $V_S = \pm 15V$ , unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	5533/5534			5533A/5534A			UNIT
			Min	Typ	Max	Min	Typ	Max	
$E_N$	Input noise voltage	$f_o = 30Hz$ $f_o = 1kHz$		7 4			5.5 3.5	7 4.5	$nV/\sqrt{Hz}$ $nV/\sqrt{Hz}$
$I_N$	Input noise current	$f_o = 30Hz$ $f_o = 1kHz$		2.5 0.6			1.5 0.4		$pA/\sqrt{Hz}$ $pA/\sqrt{Hz}$
$BB_N$	Broadband noise figure	$f = 10Hz - 20kHz$ , $R_S = 5k\Omega$					0.9		dB
CS	Channel separation	$f = 1kHz$ , $R_S = 5k\Omega$		110			110		dB


## NOTES:

- Diodes protect the inputs against over-voltage. Therefore, unless current-limiting resistors are used, large currents will flow if the different input voltage exceeds 0.6V. Maximum current should be limited to  $\pm 10mA$ .
- Operations beyond the limits of this table may impair the useful life of the device.
- This parameter is guaranteed but not tested.

# Low-Noise Op Amp

5534/5534A


## TYPICAL PERFORMANCE CHARACTERISTICS

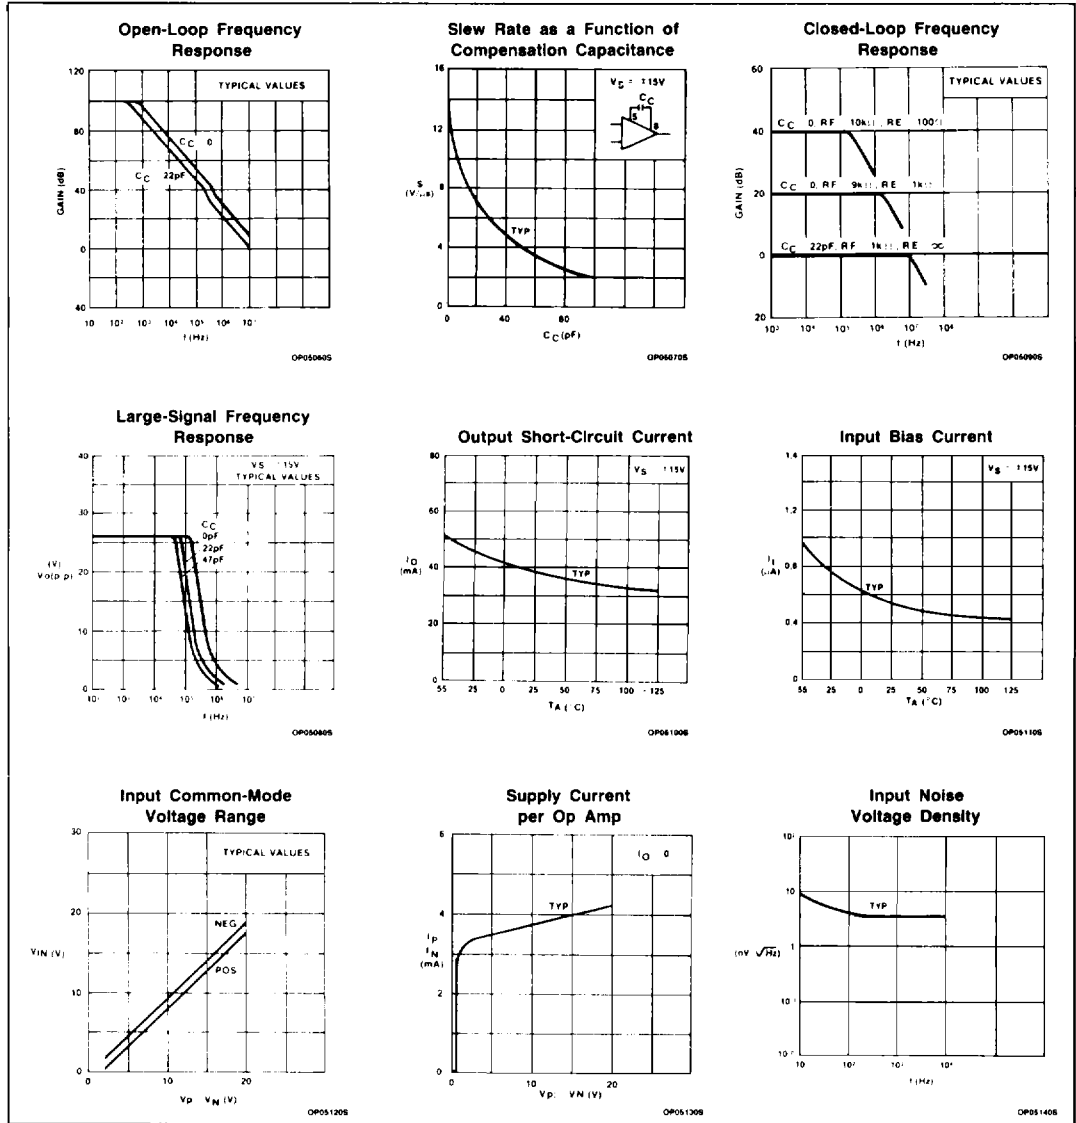


# Low-Noise Op Amp

## 5534/5534A

### TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

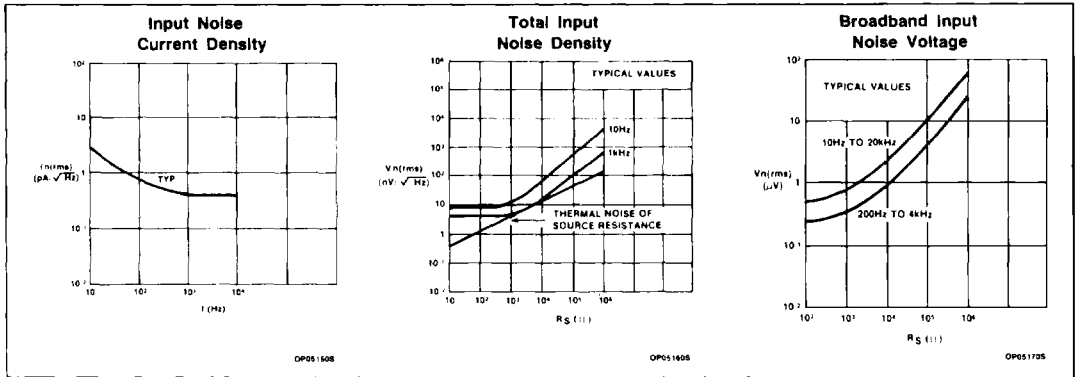

### TEST LOAD CIRCUITS

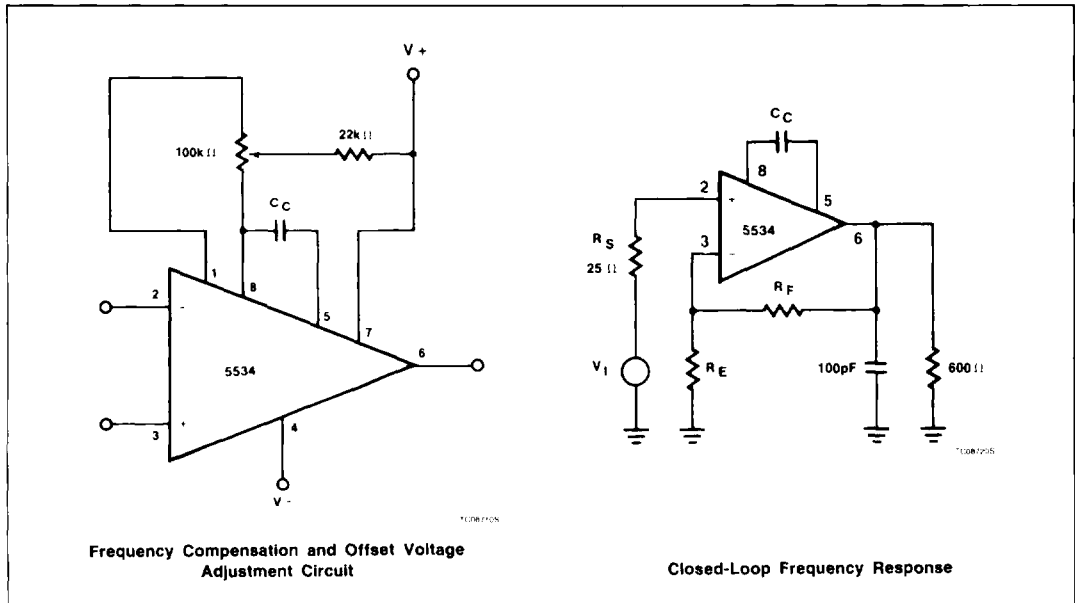

# Low-Noise Op Amp

5534/5534A

NOISE TEST BLOCK DIAGRAM

