

DATA CONTAINED IN THIS DOCUMENT IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE AND SHALL NOT BE DISCLOSED, COPIED OR USED IN ANY MANNER WITHOUT PERMISSION.

REV	EO	DESCRIPTION	DWN	APPROVED	DATE
C	10051	PICTORIALLY CHANGED 1 00 FLARED SEALING SLEEVE TO STRAIGHT (1.25) LONG SEALING SLEEVE: GENERAL	DWC	<i>[Signature]</i>	12/1/92

TABLE 1

DASH NO	MODEL	CENTER CONTACT/INTD CONTACT TYPE	FIG NO
-1	TB1459CFLP	SOCKET/PIN	1
-2	TB1459CFLS	PIN/SOCKET	1
-3	TB1459CPR	SOCKET/PIN	2
-4	TB1459CPS	PIN/SOCKET	2
-5	TB1459CPR	SOCKET/PIN	3
-6	TB1459CPS	PIN/SOCKET	3
-7	TB1459CFLP	SOCKET/PIN	4
-8	TB1459CFLS	PIN/SOCKET	4

TABLE 2

CABLE GROUP NO	CABLES ACCOMMODATED	A DIM	B DIA	C HEX	ASSEMBLE PER
-201	M17/17B-00002				
-202	TWC-7B-1, TROMPETER				
-203	TWC-12A-1A, TROMPETER				
-204	10602 RAYCHEM				
-205	1WAC-7B-1F2, TROMPETER				
-206	7826D0130, RAYCHEM				
-208	202-3927, MICRODOT				
-209	202-3942, MICRODOT				
-212	2524ED114, RAYCHEM	1.365	.334	.255	TAI-162
-217	6C875TM24H, GRUMMAN				
-218	EP022188B, RAYCHEM				
-219	2528D1114, RAYCHEM				
-220	6C875SR1, GRUMMAN				
-221	10814 RAYCHEM				
-222	10813 RAYCHEM				
-223	1M82-1149, HUGHES				

INCH	MM
.003	0.08
.0050	0.13
.010	0.25
.030	0.76
.047	1.19
.071	1.80
.128	3.25
.2400	6.10
.255	6.48
.274	6.96
.278	7.06
.330	8.38
.334	8.48
.335	8.51
.43	10.92
.4375	11.11
.707	17.96
1.25	31.75
1.365	34.67

SEALING SLEEVE & CRIMP BUSHING LOOSE WITH EACH CONNECTOR EXCEPT NOT USED ON -205, -208 & -223








EXAMPLE OF COMPLETE PART NO:

BASIC MODEL NO: TB1459C
CABLE GROUP NO: P-201
CENTER & INTERMEDIATE CONTACT TYPE: (SEE TABLE 1)
LUG POLARIZATION: FL = 4-LUG, FIG 1
P = 3-LUG, FIG 2
R = 3-LUG, FIG 3
W = 3-LUG, FIG 4

EXAMPLE OF COMPLETE PART NO:

305-0733 -1-201
BASIC PART NO: DASH NO (SEE TABLE 2)
(LUG POLARIZATION, CENTER & INTERMEDIATE CONTACT TYPE: SEE TABLE 1)
MAX PANEL THK: .128

- CONCENTRIC TWINX 4 PIECE ASSY, FULL CRIMP
- NONINSULATED BULKHEAD MOUNT RECEPTACLE, SOCKET CENTER CONTACT AND PIN INTERMEDIATE CONTACT
- FINISH: TFS-1T (500 HOURS SALT SPRAY)
- ALL DIM ARE IN INCHES

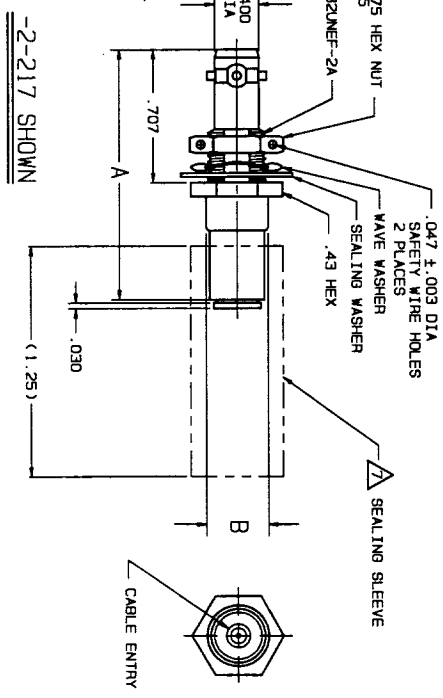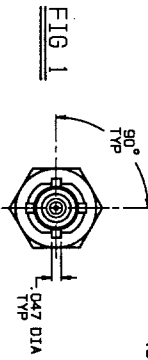

QTY	DESCRIPTION	PART NUMBER	ITEM
101 UNLESS SPECIFIED	TROMPETER	TB1459CFLP/FLS/PP/	
1000 ± 0.10	ELECTRONICS, INC.	PS/RP/RS/WP/WS	
1000 ± 0.050			
1000 ± 0.30			
DWN	DKC 12-3-92	MATERIAL	CODE 108MT
CHK	14949	DRAWING NO.	305-0733
ENGR		REV	C
APPROV		SCALE 2/1	DATE 3/7/90 SHEET 1 OF 2