



### Straight Male Cable Plug

| Cable Type (RG/U) | Model Number              | Fig. |
|-------------------|---------------------------|------|
| 405 (.085 Dia.)   | <b>SSM-0085-92-000-02</b> | I    |
| 405 (.085 Dia.)   | <b>SSM-0085-79-000-02</b> | II   |

Fig I = uses center conductor of cable


Fig II = uses solder type center contact



Note: Standard finish is gold plating on housing for direct solder to cable and passivated coupling nut.

### Straight Bulkhead Feedthru Female Cable Jack


| Cable Type (RG/U) | Model Number              |
|-------------------|---------------------------|
| 405 (.085 Dia.)   | <b>SSM-0085-83-000-00</b> |

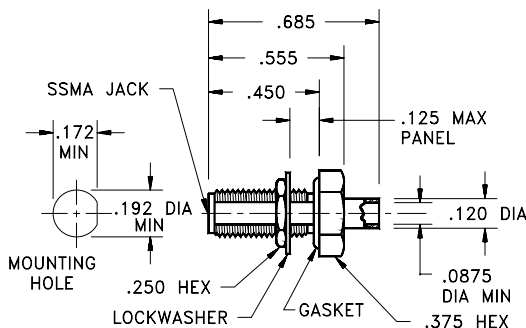

Note: Standard finish is gold plating for direct soldering to cable.

### Straight Panel Mount Female Cable Jack - 4 Hole


| Cable Type (RG/U) | Model Number              |
|-------------------|---------------------------|
| 405 (.085 Dia.)   | <b>SSM-0085-84-000-00</b> |

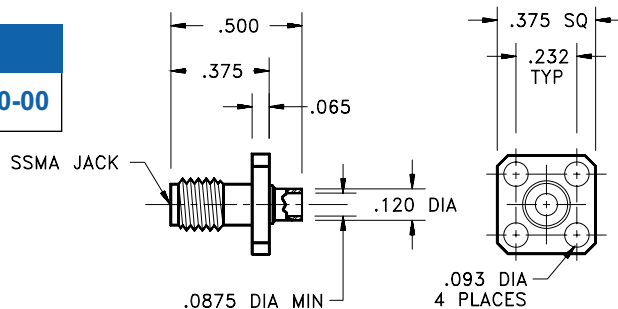

Note: Standard finish is gold plating for direct soldering to semi-rigid cable.

### Right Angle Male Cable Plug

| Cable Type      | Model Number              |
|-----------------|---------------------------|
| 405 (.085 Dia.) | <b>SSM-0085-80-000-02</b> |

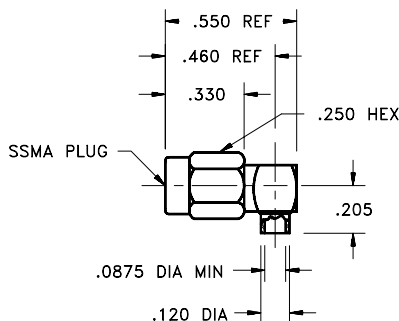

Note: Standard finish is gold plating on housing for direct solder to semi-rigid cable and passivated coupling nut.  
Detail interface dimensions and RG/U cable information can be found in the appendix.