


# L 265 200 11 P.C.B. connectors

► Expert Range - Insulation displacement connection (A.D.O.)



Female plug.

Wires parallel to connection.

A.D.O. plugs allow connection of 2 wires of the same size and nature, up to 1 mm<sup>2</sup>.



Plug  
**TILE SHAPE**

Body : UL94 V0 - PA  
Grey



## 1 mm<sup>2</sup> - Spacing 5.08 mm .200"

### Ordering details


N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0037	100	10.16	1SSA 265 202 R1100
3	0.0056	100	15.24	1SSA 265 203 R1100
4	0.0074	100	20.32	1SSA 265 204 R1100
5	0.0092	50	25.40	1SSA 265 205 R1100
6	0.0111	50	30.48	1SSA 265 206 R1100
7	0.0129	50	35.56	1SSA 265 207 R1100
8	0.0148	50	40.64	1SSA 265 208 R1100
9	0.0167	50	45.72	1SSA 265 209 R1100
10	0.0185	50	50.80	1SSA 265 210 R1100
11	0.0204	50	55.88	1SSA 265 211 R1100
12	0.0222	50	60.96	1SSA 265 212 R1100

Other numbers of poles, consult us




### Technical data

	IEC	UL / CSA
Wire size		
Solid wire	0.22 - 1 mm <sup>2</sup>	24 - 16 AWG
Stranded wire	0.22 - 1 mm <sup>2</sup>	
With ferrule		
Rated voltage	500 V	300 V
Rated current	13.5 A	10 A
Short-circuit current		
Rated wire size / Gauge	1 mm <sup>2</sup>	16 AWG (solid)
Storage temperature range	-20 ~ +80 °C	
Insulation resistance	≥ 10 <sup>9</sup> Ω	
Wire stripping length	no wire stripping required	
Recommended screwdriver	no screwdriver	
Recommended torque		
Protection	IP 20 / NEMA 1	



Plug L 265 200 11 compatible with :





### Accessories



Rep.	Description	Type	Order code	Packaging	Weight kg
1	Manual tool	OUMAD	1SNA 179 466 R0600	1	0.0290
2	Semi-automatic tool	OUPAD	1SNA 178 944 R0400	1	0.2050
3	Pneumatic tool	OUTAD	1SNA 205 710 R1100	1	0.5000
4	Extraction tool	EXAD2	1SNA 205 721 R0000	1	0.0290
5	Removable head kit	OUTA	1SNA 205 284 R0300	1	0.0290
6	Cable clamp plug 3 to 7 poles	PT1	1SSA 299 226 R0100	50	0.0012
7	Cable clamp plug 8 to 16 poles	PT2	1SSA 299 227 R0100	50	0.0033
8	Snap in mounting foot	grey <input type="checkbox"/>	1SSA 299 257 R0000	20	0.0001
9	Coding peg		1SSA 299 084 R0600	50	0.0005

### Other versions, please consult us :

Female A.D.O. plug, wires parallel to connection with brackets.

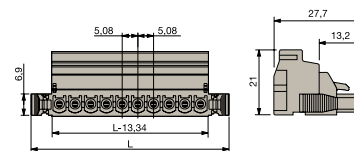

Female A.D.O. plug, wires parallel to connection with flanges and M2.5 screws.

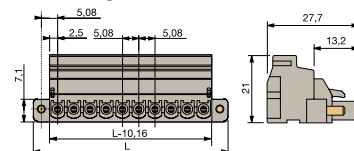

Female A.D.O. plug, wires parallel to connection with flanges and prepunched screws (not mounted - axis spacing 6.3 mm).

