

Multimode Fiber Optic Switch

Digital - Latching - Status Sensor

TYPICAL APPLICATIONS

- Optical network switching
- Optical network protection
- Optical network restoration
- Transmission equipment protection
- Loopback diagnostic testing
- Network test access
- FDDI bypass
- Local area network bypass

FEATURES

- High reliability
- Bidirectional
- Integral position sensor
- Small size
- TTL interface
- < 10 ms switching time
- 0.6 dB typical insertion loss
- PCB mountable
- Latching and non-latching configurations
- High loss path for bypass & loopback testing (option)
- Fail-safe return to bypass mode on power loss (non-latching)

FO4649



The switching mechanism is available in either a latching or non-latching version with an integral position sensor for both versions. Switches are available in On/Off, 1x2 and 2x2 configurations. There is also a high attenuation version of the 2x2 switch used for node bypass applications.

The silicon based electromechanical multimode switch uses a moving mirror actuation scheme to allow light to pass through the switch on activation or to be blocked/diverted when the switch is deactivated in a non-latching configuration. This makes the switch particularly well suited for fail-safe bypass applications.

A standard PCB footprint allows the switch to be conveniently mounted. The standard switch is equipped with 1m 62.5/125 μ m multimode fiber pigtailed with no connectors, but a variety of fiber and connector options are available.

For more information about our entire line of fiber optic products, please visit our web site at www.moog.com.

MOOG
COMPONENTS GROUP

1213 North Main Street • Blacksburg, VA 24060-3127
800-336-2112 • FAX 540-557-6400
www.moog.com • e-mail: mcg@moog.com

SPECIFICATIONS

	Min	Typ	Max	Unit
Environmental Ratings				
Operating Temperature Range	-10	—	70	° C
Storage Temperature Range	-40	—	85	° C
Humidity (non-condensing)	—	—	95	% RH
Mechanical Life	10	—	—	M CYCLE
Characteristics				
VCC (also available w/ 3.3V and 12V)	—	5	—	V
Switching Time	—	5.0	10.0	ms
Loss* 1-3 port	—	0.7	0.8	dB
Loss* 2-4 port	—	0.7	0.8	dB
Loss* 3-4 port	—	0.8	1.0	dB
Loss* 1-2 port	—	0.8	1.0	dB
Loss* 1-2 port (high atten. bypass)	4.5	5.5	6.0	dB
Crosstalk	60	—	—	dB

*Loss without connectors

PART NUMBERING

FO4649- [D] - [] - [] - [] - []

CONFIGURATION	
Code	Type
L	Latching
N	Non Latching

INTERFACE	
Code	Type
D	Digital (TTL)
x	Contact Mfg

ACTIVATION VOLTAGE	
Code	Voltage
3	3.3 V
5	5 V
1	12 V
x	Other

INPUT PORTS	
Code	#
01	1
02	2




OUTPUT PORTS	
Code	#
01	1
02	2
B2	2

(1 High Attenuation Bypass Path)

PIGTAIL LENGTH	
3 Digit Code for length in centimeters (+10/-00 cm). Standard length is 100 cm Maximum length equals 300 cm	

CONNECTOR	
Code	Style
NC	None
FC	FC/PC
SC	SC/PC
LC	LC/PC
ST	ST/PC
XX	Special

FIBER	
Code	λ
A	50/125/900 μm
B	62.5/125/900 μm
C	100/140/900 μm
x	Special

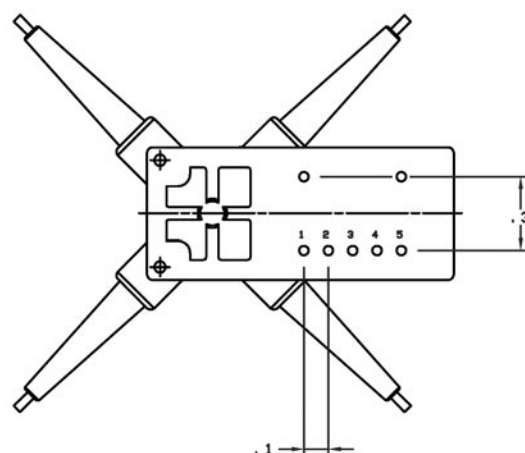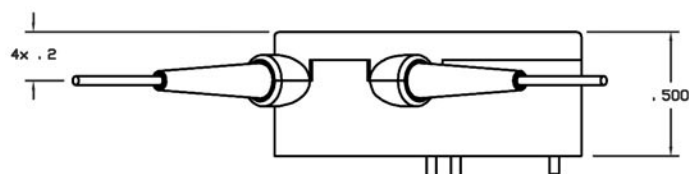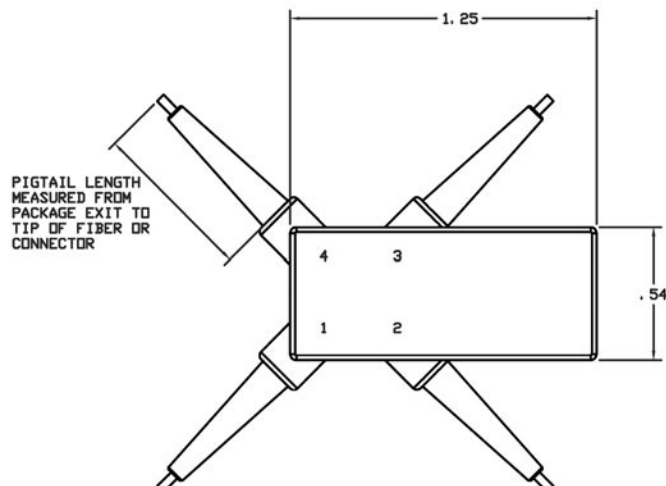

All dimensions are in inches.

CONFIGURATIONS

TYPICAL SWITCH CONFIGURATION (2X2)

OPTICAL PATH	STATUS
1-3, 2-4	Logic High
1-2, 3-4	Logic Low

(Bypass Mode)

SWITCH PIN CONFIGURATION

PIN NUMBER	DESCRIPTION
1	Set
2	VCC
3	GND
4	Rst
5	Status

Specification and information are subject to change without prior notice.
© 2005 Moog Components Group MSG80027 7/05

MOOG
COMPONENTS GROUP

800-336-2112 • FAX 540-557-6400 • www.moog.com • e-mail: mcg@moog.com
1213 North Main Street • Blacksburg, VA 24060-3127