


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

KD-59-110

REVISIONS

ISSUE	CHANGES
5	CN 38128 C REDRAWN TML 03/27/01

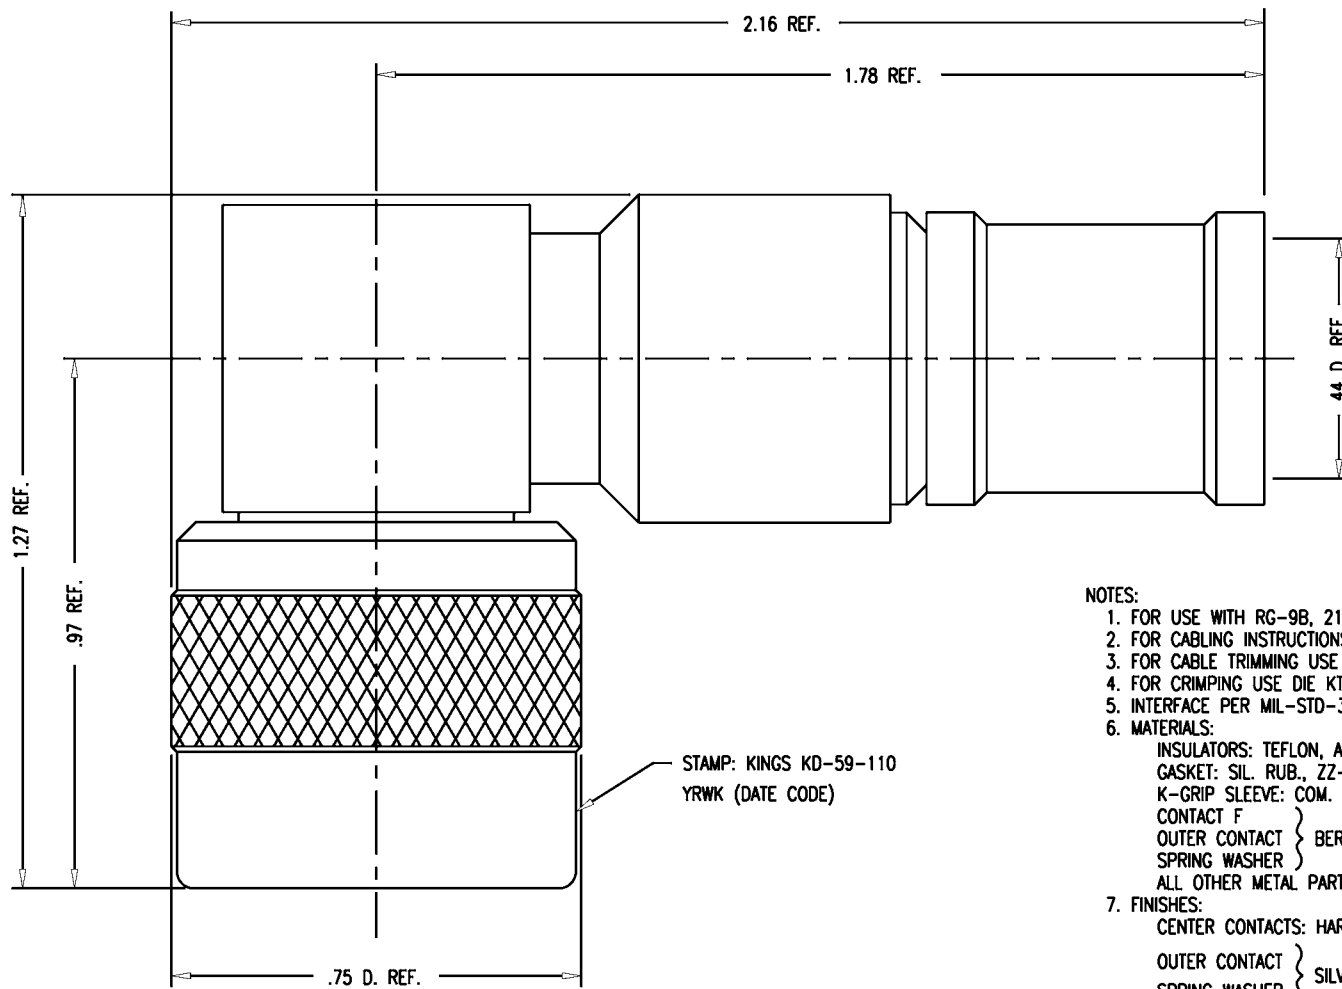

NOTES:

- FOR USE WITH RG-9B, 214/U AND BA-6903 CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-5402.
- FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
- FOR CRIMPING USE DIE KTH-2079.
- INTERFACE PER MIL-STD-348, FIG. 302-1.
- MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-1457
 - GASKET: SIL. RUB., ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 - CONTACT F
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - SPRING WASHER }
 - ALL OTHER METAL PARTS: BRASS, QQ-B-626
- FINISHES:
 - CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 - OUTER CONTACT } SILVER PLATE PER QQ-S-365
 - SPRING WASHER }
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1000 VRMS
 - FREQUENCY RANGE: DC TO 2 GHz

KD-59-110S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, ANGLE, C

DRAWN	GINO	DATE	11/11/74
-------	------	------	----------

DESIGN	LI	DATE	06/05/75
--------	----	------	----------

APPR.		DATE	
-------	--	------	--

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KD-59-110

SD