



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SC5343
2SC5343-O
2SC5343-Y
2SC5343-G
2SC5343-L

Features

- Low Collector Saturation Voltage: $V_{CE(sat)}=0.25V(\text{Max.})$
- Low Output Capacitance: $C_{ob}=2.0pF(\text{Typ.})$
- Complementary Pair With 2SA1980
- Marking : C5343
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	50	V
V_{CBO}	Collector-Base Voltage	60	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current	150	mA
P_C	Collector power dissipation	625	mW
T_J	Junction Temperature	150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

NPN Silicon
Transistors

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS


$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$)	60	---	---	Vdc
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=10mA$, $I_E=0$)	50	---	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=10\mu A$, $I_C=0$)	5.0	---	---	Vdc
I_{CBO}	Collector-Base Cutoff Current ($V_{CB}=60Vdc$, $I_E=0$)	---	---	0.1	μA
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB}=5.0Vdc$, $I_C=0$)	---	---	0.1	μA

ON CHARACTERISTICS

h_{FE}	Forward Current Transfer ratio* ($I_C=2.0mA$, $V_{CE}=6.0Vdc$)	70	---	700	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=100mA$, $I_E=10mA$)	---	---	0.25	Vdc
f_T	Transition Frequency ($V_{CE}=10Vdc$, $I_C=1.0mA$)	80	---	---	MHz
C_{ob}	Collector Output Capacitance ($V_{CB}=10Vdc$, $I_E=0$, $f=1.0MHz$)	---	2.0	3.5	pF
NF	Noise Figure ($V_{CE}=6.0Vdc$, $I_C=0.1mA$, $f=1.0KHz$, $R_g=10K\Omega$)	---	---	10	dB

* h_{FE} rank / O: 70-140, Y:120-240, G:200-400, L:300-700

TO-92

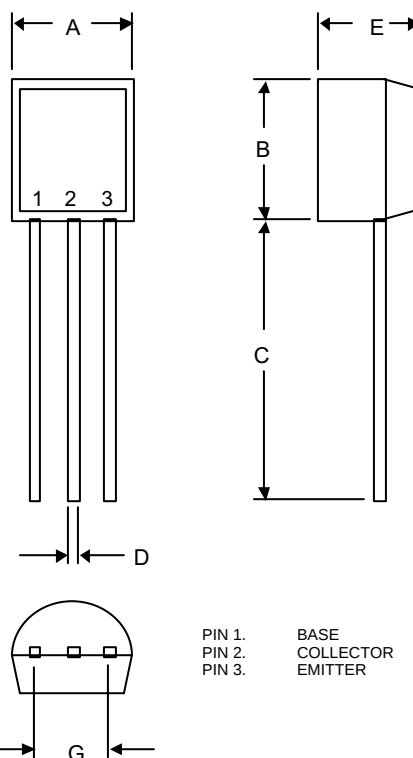

PIN 1. BASE
PIN 2. COLLECTOR
PIN 3. EMITTER

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	

www.mccsemi.com

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical,
Aerospace or Military Applications.