
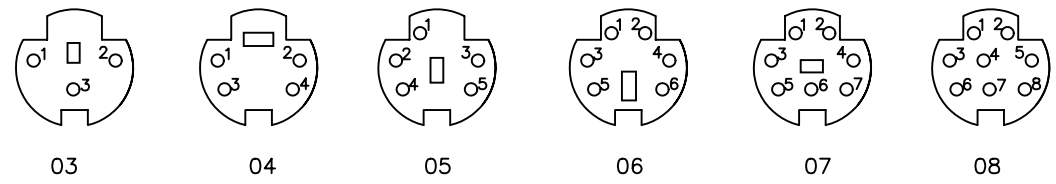


**SPECIFICATIONS:**  
 Contact Current Rating:1Amperes  
 Dielectric Withstanding Voltage:AC 500V  
 Insulation Resistance:500 Megohms Min. At DC 500V  
 Contact Resistance:30 Milliohms Max.  
 Operating Temperature :−55°C To +105°C  
 Contact :Copper Alloy And Gold Flashed  
 Insulator: P.B.T. UL 94V−0 Rated  
 Shell:Copper Alloy And Nickel Plated

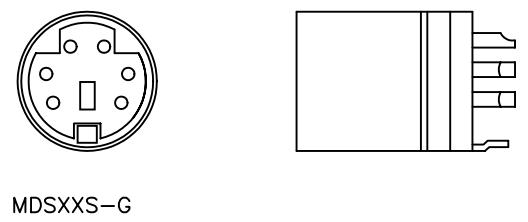

**AUK** A NUMBER OF AUK GROUP  
**太聯事業股份有限公司**  
 AUK CONTRACTORS CO., LTD.

DRAWING No.  
 MDS03S

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE