


- Plating:
- \* Shell: 30~50?" nickel plated over copper
  - \* Bracket: 30~50?" nickel plated over copper
  - \* Boardlock: Tin plated 100?" over 30~50?" nickel overall

- Material :
- \* Insulator: PBT, UL94V-0, Color: Black
  - \* Contact: Phosphor Bronze
  - \* Shell: Steel
  - \* Bracket: Steel
  - \* Boardlock: Phosphor Bronze

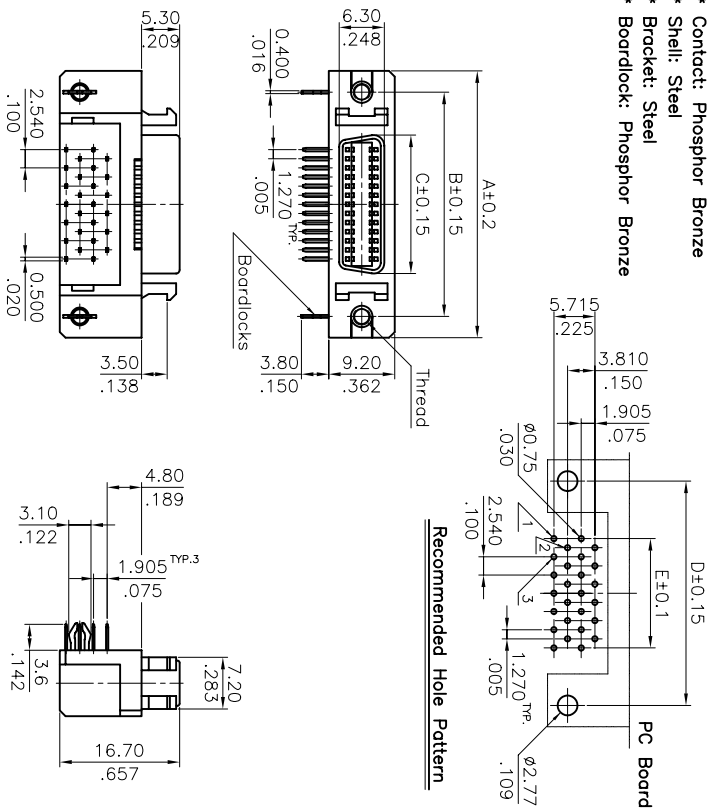

No. of Contacts	A	B	C	D	E
14	29.57(1.164)	23.64(.931)	11.68(.460)	23.64(.931)	7.62(.300)
26	37.19(1.464)	31.26(1.231)	19.30(.760)	31.26(1.231)	15.24(.600)
50	52.43(2.064)	46.50(1.831)	34.54(1.360)	46.50(1.831)	30.48(1.200)

LECO CORPORATION

GENERAL TOLERANCE

X ± 0.30  
X' ± 0.12  
.XX ± 0.06  
.XX' ±

APPROVED BY:

CHECKED BY:

DRAW BY:

SCSI-\*\*\*SL\*\*

TITLE: 1.27mm(.050")  
Right Angle P.C.B.  
(SCSI) Connector

DRAWING NO.: SCS124S


UNITS: 3/2

SCALE: A4

SHEET: 1/2

REV.	ECO. NO.	CHG	APPD.	XXX±	0.04	XXX±
A	DWG REL.			.XX ±	0.06	.XX' ±

- Ordering Information:
- SCSI - \*\* SL \*\*
- 1 2 3
1. No. of Contacts.
2. Contact Plating:  
F=Selective gold over 30~50?" nickel overall  
J=15?" gold selective over 30~50?" nickel overall  
K=30?" gold selective over 30~50?" nickel overall
3. Threaded Options:  
Color: Black Color: Ivory  
1 = #2-56 4 = #2-56  
2 = #4-40 5 = #4-40  
3 = M2.6 6 = M2.6

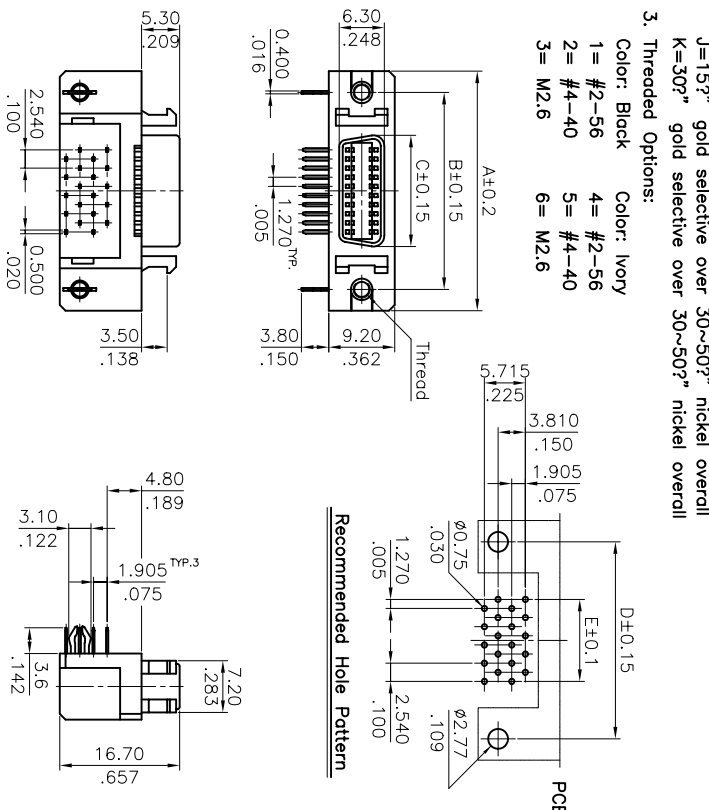

No. of Contacts	A	B	C	D	E
20	33.38(1.314)	27.45(1.081)	15.49(.610)	27.45(1.081)	11.43(.450)
36	43.54(1.714)	37.61(1.481)	25.65(1.010)	37.61(1.481)	21.59(.850)
68	63.86(2.514)	57.93(2.281)	45.97(1.810)	57.93(2.281)	41.91(1.650)

LECO CORPORATION

GENERAL TOLERANCE

X ± 0.30  
X' ± 0.12  
.XX ± 0.06  
.XX' ±

APPROVED BY:

CHECKED BY:

DRAW BY:

SCSI-\*\*\*SL\*\*

TITLE: 1.27mm(.050")  
Right Angle P.C.B.  
(SCSI) Connector

DRAWING NO.: SCS124S

UNITS: 3/2

SCALE: A4

SHEET: 2/2

REV.	ECO. NO.	CHG	APPD.	XXX±	0.04	XXX±
A	DWG REL.			.XX ±	0.06	.XX' ±