

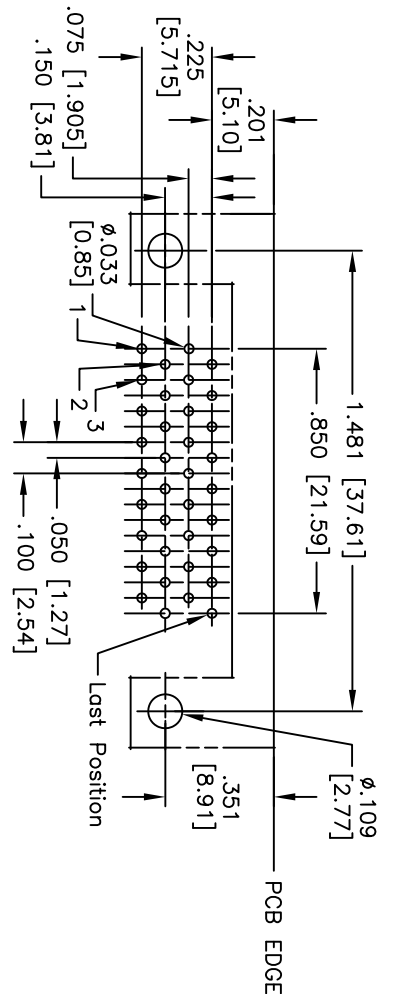
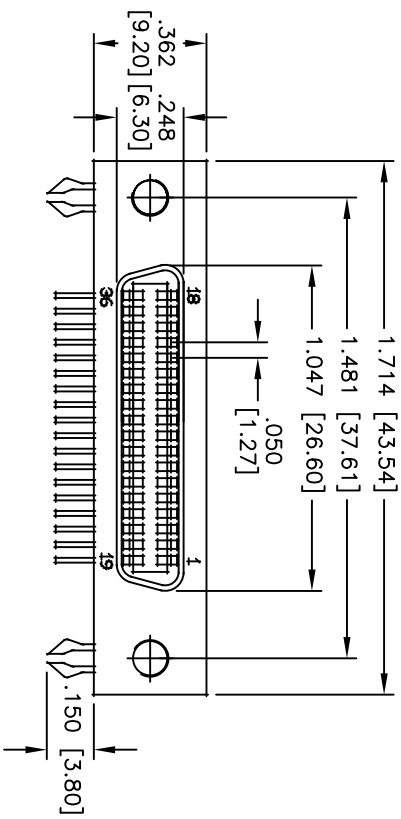


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/09/10	

APPROVED: _____
 DATE: _____ TITLE: _____

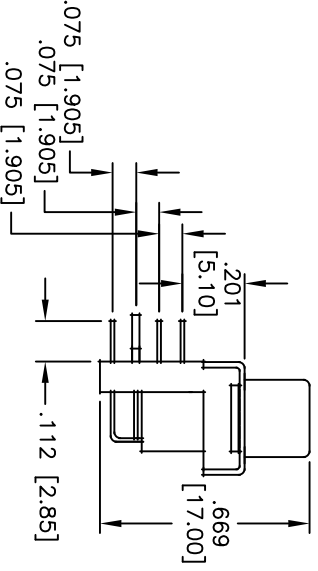

RECOMMENDED PCB LAYOUT

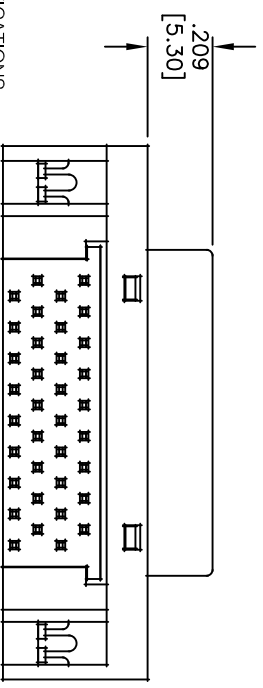

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Front Shell: Steel, Nickel plated
- Bracket: Steel, Nickel plated
- Boardlock: Brass, Tin plated
- Plating: 15u" Gold over Nickel underplate on mating area, Tin over Copper underplate on tails
- Electrical: Current rating: 1 Amp max
- Contact resistance: 35 mohms max
- Insulation resistance: 500 Mohms min
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, ROHS compliant
- Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SCSI III/II SOCKET, R/A, NO LATCH BLOCKS
 BOARDLOCKS, M.2.6 MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	TITLE	
DRAWN	DY	12/09/10	
CHECKED		SIZE	
APPROVED		X	
PART NO.		SCALE: NTS	
S2A-SR-36-2-BL-3-A-15		SHEET 1 OF 1	
REV.		REV.	