

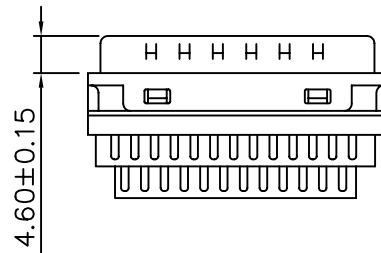


SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/RMS For 1 Minute
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing :Thermoplasitc P.B.T UL 94V-0
 Contact: Phosphor Bronze Gold Selective Plated
 Shell : Steel,Nickel Plated Over Copper

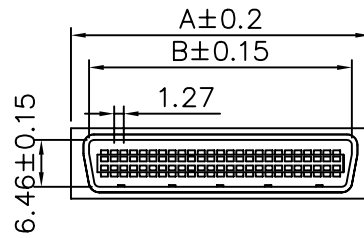

Circuits	A	B	C	D
14	16.45	12.80	8.50	16.40
20	20.00	16.60	9.30	15.20
26	24.00	20.40	9.30	15.50
36	30.40	26.70	8.50	15.20
50	39.30	35.60	9.30	15.50

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 HPC014PS

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE