

Helping Customers Innovate, Improve & Grow



EX-209

Description

Features

- 16 pin Double Dip Package
- Ruggedized hybrid thick film construction
- Low Power Consumption
- Frequency Range: 10 MHz to 40 MHz
- Previous Model: EX-245

Applications

- Severe Environmental Conditions

Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Frequency Stabilities ¹					
[10 to 20 MHz]					
vs. operating temperature range (referenced to +25°C)	-50 -75 -100		+50 +75 +100	ppb ppb ppb	0... +60°C -20... +70°C -40... +85°C
Initial tolerance for fixed frequency	-1.0		+1.0	ppb	fixed, no adjust VS ± 5% Load ± 5% after 7 days of operation
Stability	-0.2		+0.2	ppb	
vs. supply voltage change	-15		+15	ppb	
vs. load change	-15		+15	ppb	
vs. aging / day	-2		+2	ppb	
vs. aging / 1 year	-200		+200	ppb	
vs. aging / 10 year (10 to <12 MHz)	-1000		+1000	ppb	
vs. aging / 10 year (12 to <16 MHz)	-1500		+1500	ppb	
vs. aging / 10 year (16 to 20 MHz)	-2000		+2000	ppb	
Warm-up Time ²			120 180	seconds seconds	to ± 1ppm of final freq. @+25°C to ± 100ppb of final freq. @+25°C


Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Frequency Stabilities¹					
[>20 to 40 MHz]					
vs. operating temperature range (referenced to +25°C)	-75 -100 -150		+75 +100 -150	ppb ppb ppb	0... +60°C -20... +70°C -40... +85°C
Initial tolerance for fixed frequency Stability	-1.5 -0.3		+1.5 +0.3	ppb ppb	fixed, no adjust
vs. supply voltage change	-25		+25	ppb	VS ± 5%
vs. load change	-25		+25	ppb	Load ± 5%
vs. aging / day	-3		+3	ppb	after 7 days of operation
vs. aging / 1 year	-300		+300	ppb	
vs. aging / 10 year	-3000		+3000	ppb	
Warm-up Time ²			120 180	seconds seconds	to ± 1ppm of final freq. @+25°C to ± 100ppb of final freq. @+25°C
Supply Voltage (Vs)					
Supply voltage (Standard)	4.75	5.0	5.25	VDC	
Power Consumption			2.2 0.7 1.2	Watts Watts Watts	during warm-up steady state @ +25°C steady state @ -40°C
RF Output					
Signal [Standard]	HCMOS				
Load		15		pF	
Signal Level (Vol)			0.1	VDC	
Signal Level (Voh)	0.9			VDC	
Rise/Fall Time			+7	ns	(10-90%)
Duty cycle	40		60	%	(Voh-Vol)/2
Signal [Option]	Sinewave				
Load		50		ohm	
Output Power (Standard)	0.0	+2.0	+4.0	dBm	50 ohm load
Output Power (Option)	+3.0	+5.0	+7.0	dBm	50 ohm load
Harmonics			-25	dBc	
Spurious			-60	dBc	
Frequency Tuning (EFC)					
Tuning Range	Fixed OCXO; No adjust				
Tuning Range	Sufficient to compensate for 10 years aging				EFC (0V to 4V)
Vref	+4.0	+4.1	+4.2	VDC	source current 1 mA maximum

Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Additional Parameters ¹ [10 to 20 MHz]					
Phase Noise ³ (10 to 20 MHz)			-100	dBc/Hz	10 Hz
			-125	dBc/Hz	100 Hz
			-140	dBc/Hz	1 kHz
			-145	dBc/Hz	10 kHz
			-145	dBc/Hz	10 kHz
Phase Noise ³ (>20 to 40 MHz)			-90	dBc/Hz	10 Hz
			-115	dBc/Hz	100 Hz
			-130	dBc/Hz	1 kHz
			-140	dBc/Hz	10 kHz
			-140	dBc/Hz	10 kHz
G-Sensitivity			1	ppb/g	Test at 10g sine vibration at 100Hz
Environmental Conditions (Designed to meet)					
• Radiation Tolerant (operating):			Active devices are selected from a family of product that is inherently radiation tolerant to meet 100krad (SI) total dose		
• Mechanical Shock (survive) ^{***} :			MIL-STD-202, Test Method 213, Condition E (1000G, 0.5msec)		
• Vibration Random (survive) ^{***} :			MIL-STD-202, Test Method 214, Condition I-F (20Grms, 3 minutes/axis)		
• Vibration Sine (survive) ^{***} :			MIL-STD-202, Test Method 204, Condition D (20Grms, 20 minutes/axis)		
Note: *** Met by design, not tested					
Screening Options					
Ordering Code	S			B	
Test Inspection	S-Level Screening			B-Level Screening	
Nondestructive Bond Pull	MIL-STD-883 Method 2023			N/A	
Internal Visual Per Mil-PRF-55310 Requirement	Internal Visual Per Mil-PRF-55310 Requirement			Internal Visual Per Mil-PRF-55310 Requirement	
Stabilization Bake	MIL-STD-883 Method 1008, Condition C		150°C for 48hrs	MIL-STD-883 Method 1008, Condition C	150°C for 48hrs
Thermal Shock	MIL-STD-883 Method 1011, Condition A		0°C to 100°C for 15cycles	N/A	
Temperature Cycling (1)	MIL-STD-883 Method 1010, Condition A		-55°C to 85°C (2) for 10cycles	MIL-STD-883 Method 1010, Condition A	-55°C to 85°C (2) for 10cycles
Constant Acceleration (1)	MIL-STD-883 Method 2001		1000g's (3) Y1 Only	MIL-STD-883 Method 2001	1000g's (3) Y1 Only
PIND	MIL-STD-883 Method 2020, Condition B		10g peak at 60Hz minimum	N/A	
Electrical Test	Per Mil-PRF-55310 Requirement			Per Mil-PRF-55310 Requirement	
Burn-in (1)	85°C (2) for 240hrs			85°C (2) for 240hrs	
Radiographic	MIL-STD-883 Method 2012			N/A	
Note: (1) These test inspections deviate from screening requirements for class 2 oscillator in MIL-PRF-55310. (2) The maximum operating and storage temperature of the EX-209 is +85°C. The EX-209 shall not be exposed to temperature higher than +85°C at length of time. (3) The design and construction of the EX-209 can withstand up to 1000g's constant acceleration					

Outline Drawing / Enclosure

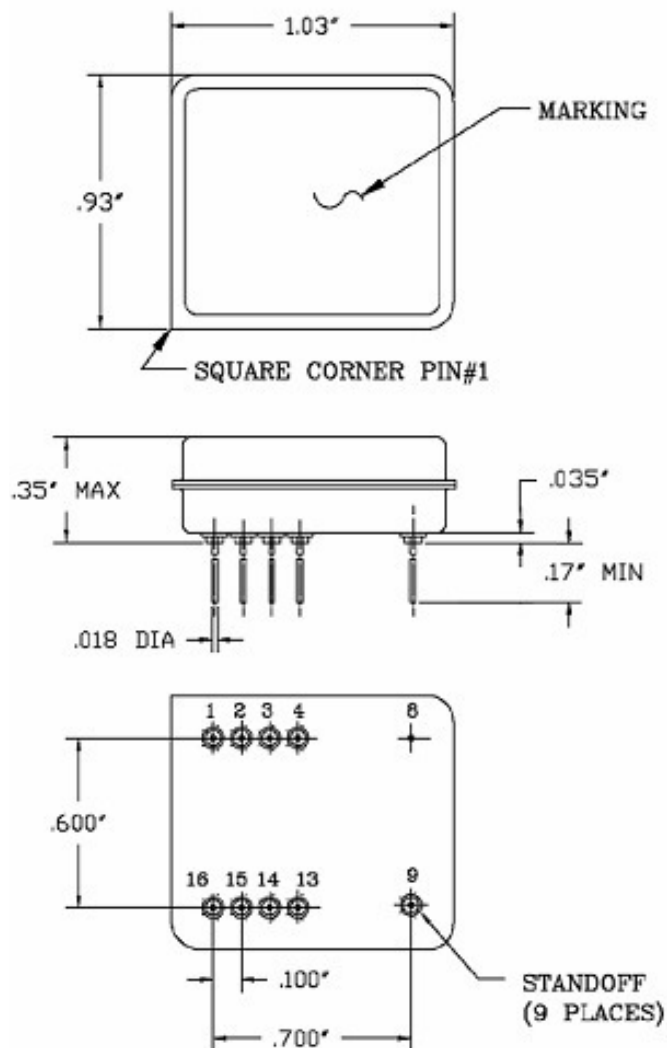


Dimensions in inches (mm)

Type A		
Code	Height "H"	Pin Length "L"
A1	0.35 (8.9 mm)	0.17

Pin Connections	
1	EFC \ No Connect
2-4	No Connect
8	Ground (Case)
9	Output
13-14	No Connect
15	Vref \ No Connect
16	Supply Voltage Input

Recommended Reflow Profile

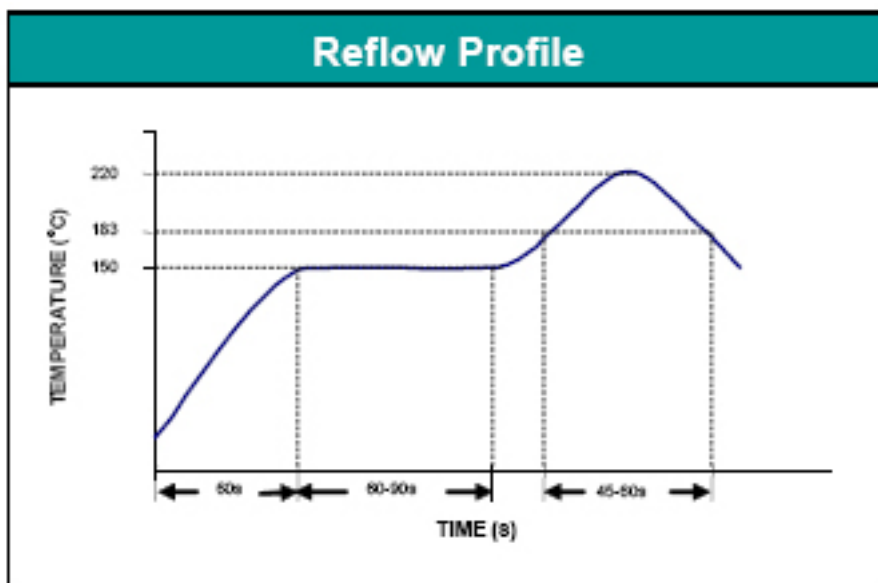

Ordering Information

EX - 209 0 - D A J - 2SS 0 - 10M0000000

Product Family

EX: EMXO

Package

25 x 25 mm

Height

0: A8.9mm

Supply Voltage

D: 5 Vdc

RF Output Code

A: HCMOS

E: Sinewave

Temperature Range

E: -40°C to +85°C

J: -20°C to +70°C

S: 0°C to +60°C

Frequency

Tuning Option (1st digit):

0: Fixed Frequency (HCMOS)

1: Fixed Frequency (0 dBm)

2: Fixed Frequency (+3 dBm)

3: Electrical Tuning (HCMOS)

4: Electrical Tuning (0 dBm)

5: Electrical Tuning (+3 dBm)

Stability Code (1st digit):

0: ±50ppb

1: ±75ppb

2: ±100ppb

3: ±150ppb

Screening Option (2nd digit):

S: "S" Level screening

B: "B" Level screening

E: "EM" Engineering Model

P: Proof of Design "POD-Prototype"

Crystal Option (3rd digit):

S: Swept Quartz

N: Non-Swept Quartz

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
1F-2F, No 8 Workshop, No 308 Fenju Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, China 200131
Tel: 86.21.5048.0777
Fax: 86.21.5048.1881

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 11/25/2008 daf