


DRAWING NO: 110004 MADE FROM

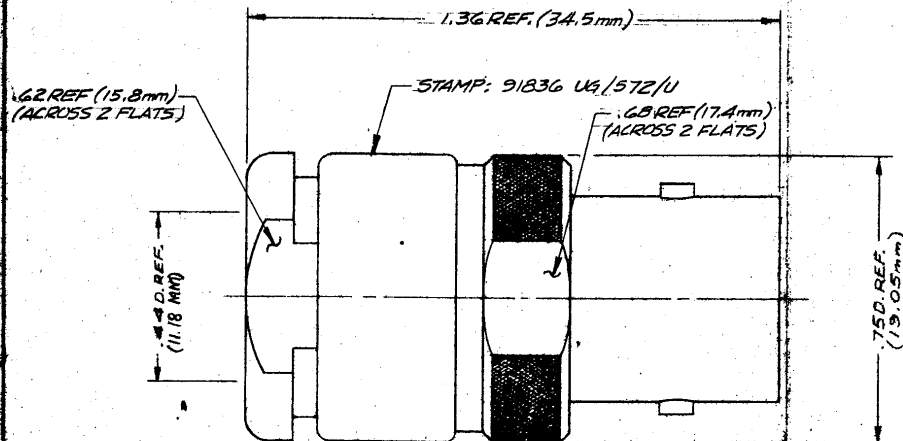

NOTES:

1. FOR USE WITH RG-8, 9, 11, 13, 213, 214 & 216/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-1002.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
2. PLACE DECIMALS ± .004
3. ANGLE ± 9°30'
4. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES

5. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
6. NO FILLETS PERMITTED.
7. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
8. ALL DIMENSIONS PRIOR TO PLATING.
9. ALL PLATING IN ACCORDANCE WITH MIL 19004.

UG-572/U

REVISIONS	
NO.	DATE
5	CN 18608 MA 1 MAY 79
6	CN 32281 C KH 13 JUN 90

S=D

SCALE	4:1
OFFSHORE SURFACE FINISH	
	- RD-31-01
USED ON	
REV	
C JACK	
DRAWN	AT
DATE	15 DEC 67
APP'D	LZ
DATE	7 FEB 68
KINGS ELECTRONICS CO., INC. MEMPHIS, TENN. 38115	
UG-572/U	