


# RF Coaxial Lightning & EMP Protection

## λ/4 Stub Tuners – Product Offering

### DCS 1800




**Type N Clamp Bulkhead Jack**

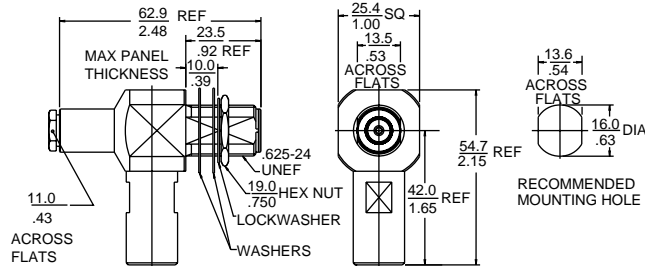

Part Number	Cable
<b>N15X12E470X</b>	T-Flex402
Bandwidth	± 70 MHz
Center Frequency	1795 MHz
Contact Plating	6,0mm±0,5 Silver
Body Plating	6,0mm±0,5 Silver
Max Panel	10,00mm
Compliant With	CECC22210
Coupling Torque	0.7-1.1Nm
Proof Torque	1.7Nm
Endurance	500 Matings




**7-16 Clamp Bulkhead Jack**

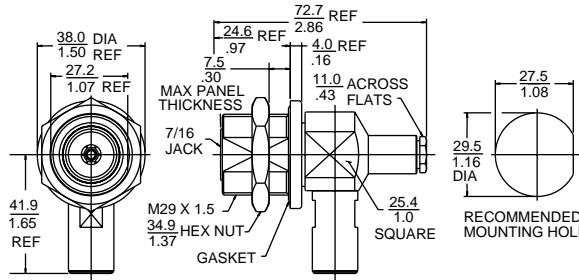

Part Number	Cable
<b>D75X13E470X</b>	T-Flex402
Bandwidth	± 70 MHz
Center Frequency	1795 MHz
Contact Plating	6,0mm±0,5 Silver
Body Plating	6,0mm±0,5 Silver
Max Panel	10,00mm
Compliant With	CECC22190
Coupling Torque	25 - 30Nm
Proof Torque	35Nm
Endurance	500 Matings




**7-16 Jack to 7-16 Bulkhead Jack Adapter**

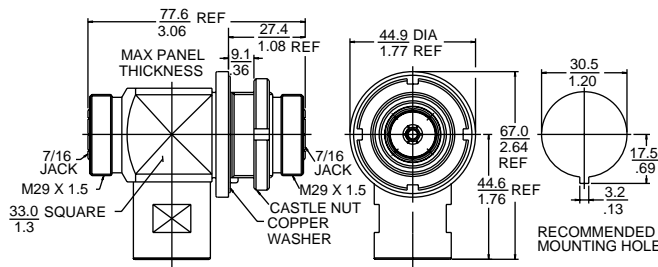

Part Number	D75X15B999X
Bandwidth	± 70 MHz
Center Frequency	1795 MHz
Contact Plating	6,0mm±0,5 Silver
Body Plating	White Bronze
Max Panel	8,00mm
Compliant With	CECC22190
Coupling Torque	25 - 30Nm
Proof Torque	35Nm
Endurance	500 Matings



**Type N Crimp Bulkhead Jack**

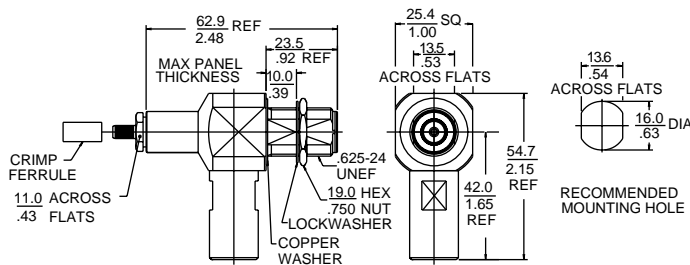

Part Number	Cable
<b>N15X18E010X</b>	RG58C/U
Bandwidth	± 70 MHz
Center Frequency	1795 MHz
Contact Plating	6,0mm±0,5 Silver
Body Plating	6,0mm±0,5 Silver
Max Panel	10,00mm
Compliant With	CECC22210
Coupling Torque	0.7-1.1Nm
Proof Torque	1.7Nm
Endurance	500 Matings

Specifications Subject to Change Without Notice.