

MIL-55310/16-Series Specifications




A – 0.887L x 0.540W x 0.200H (in)

B – 0.887L x 0.540W x 0.265H (in)

PDI MIL-PRF-55310/16 Oscillators are available in both standard and custom frequencies to provide precision timing in a hermetically sealed package for military and space applications. PDI provides quick-turn sampling for your proto-typing needs, mass production capability, and competitive pricing.

ex) **M55310/16—B—31—A—7M000000**

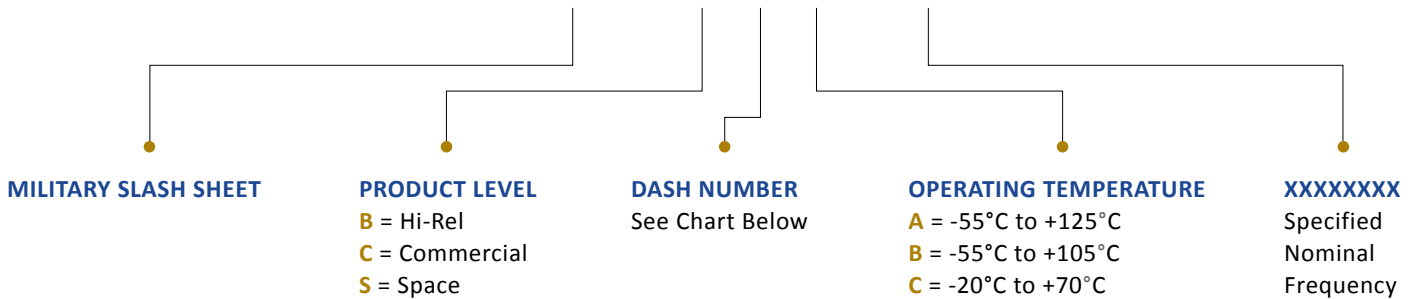

Dash No. Package	A	B	Frequency Range MHz	Supply Current mA Max.	Rise/Fall Times nS Max.	Duty Cycle @ 1.4 Vdc	Load TTL Max.	Tolerance @ 23°C ppm Max.	Aging Per Year ppm Max.	Operating Temperature		
										(A)	(B)	(C)
21	22		0.750000 – 5.000000	70	15	45 to 55%	10	±15	±5	±50	±40	±25
24	25		5.000000					±25	±10	±100	±80	±50
31	32		4.000000 – 20.000000	30	15	40 to 60%	10	±15	±5	±50	±40	±25
34	35		20.000000					±25	±10	±100	±80	±50
41	42		20.000000 – 60.000000	65	5	40 to 60%	6	±15	±5	±50	±40	±25
44	45		60.000000					±25	±10	±100	±80	±50
Aging Per Year (Max.)									5 ppm		10 ppm	
Per 30 Days									±0.7 ppm		±1.5 ppm	
Per 90 Days									±1.5 ppm		±3.0 ppm	

NOTES:

All product supplied in anti-static packaging.
 A TTL unit load is defined as: 1.60 mA sink, 0.04 mA source, and 2.00 pF capacitance.
 At +70°C ± 2.0°C, intervals not more than every 72 hours for a minimum of 30 days.
 The product described in this spec. consist of this specification and MIL-PRF-55310.
 Decimal XXX = ± .005, XX = ± .020 Metric [XXX = ± .13], [XX = ± .50]
 Specifications subject to change without notice, last updated 4/1/13.

MIL-55310/16-Series Specifications



Parameter		Frequency Range		Units
		0.750000 to 60.000000 MHz		
Frequency Stability	vs Temperature (Max.)			ppm
	-20 to +70°C (Type C)	Per Chart		
	-55 to +105°C (Type B)	Per Chart		
	-55 to +125°C (Type A)	Per Chart		
	vs Supply Voltage (Max. for a 10% charge)	±2.0		
	vs Aging (@ +70°C ± 2.0°C) (Max.)	5 Per Year	10 Per Year	
	Per 30 Days	±0.7	±1.5	
	Per 90 Days	±1.5	±3.0	
	Tolerance (@ +23°C ± 1.0°C) (Max.) Within 30 Days of Shipment	Per Chart		
Temperature Range	Operating	Per Chart		°C
	Storage	- 62 to +125		
Output		TTL		
Supply Voltage	±10.0 %	+5.0		Vdc
Logic Levels	High (Min.)	2.4		Vdc
	Low (Max.)	0.5		

Test Inspection	Product Level S Method Condition	Product Level B & C Method Condition
Internal Visual	See 4.4.1	See 4.4.1
Stabization bake (prior to seal) 1/	MIL-STD-883, method 1011, Condition C (+150°C) 48 hours min.	MIL-STD-883, method 1011, Condition C (+150°C) 48 hours min.
Thermal Shock	MIL-STD-883, method 1011, Condition A	N/A
Temperature Cycling	MIL-STD-883, method 1010 Condition B	MIL-STD-883, method 1010 Condition B
Constant Acceleration	MIL-STD-883, method 2001. Condition A, Y1 only (5000 g's)	MIL-STD-883, method 2001. Condition A, Y1 only (5000 g's)
Seal (Fine and Gross Leak) 2/	See 4.8.2.2.2	See 4.8.2.2.2
Particle Impact Noise Detection (PIND)	MIL-STD-883, method 2020 Condition B	N/A
Electrical Test:		
Input Current Power	4.8.5	N/A
Output Waveform	4.8.20	N/A
Output Voltage-Power	4.8.21	N/A
As Specified	3.1	3.1
Burn-In (Load)	+125C, nominal supply voltage and burn-in load, 240 hours minimum	+125C, nominal supply voltage and burn-in load, 160 hours minimum
Electrical Test:	Nominal and extreme supply voltages, specified load, +23°C and temperature ex- tremes, record all test parameters by serial number	Nominal supply voltages, specified load, +23°C and verify frequency at the temperature extremes
Input Current Power	4.8.5	4.8.5
Output Waveform	4.8.20	4.8.20
Output Voltage-Power	4.8.21	4.8.21
As Specified	3.1	3.1
Radiographic 3/	MIL-STD-883, method 2020	N/A

MIL-55310/16-Series Specifications

PACKAGE DIMENSIONS

PIN	CONNECTION
1-6	No Connect
7	Ground/Case
8	Output
9-13	No Connect
14	Supply Voltage

