

# COP620C/COP622C/COP640C/COP642C/ COP820C/COP822C/COP840C/COP842C/ COP920C/COP922C/COP940C/COP942C Single-Chip microCMOS Microcontrollers

## General Description

The COP820C and COP840C are members of the COP<sup>STM</sup> microcontroller family. They are fully static parts, fabricated using double-metal silicon gate microCMOS technology. This low cost microcontroller is a complete microcomputer containing all system timing, interrupt logic, ROM, RAM, and I/O necessary to implement dedicated control functions in a variety of applications. Features include an 8-bit memory mapped architecture, MICROWIRE/PLUST<sup>SM</sup> serial I/O, a 16-bit timer/counter with capture register and a multi-sourced interrupt. Each I/O pin has software selectable options to adapt the device to the specific application. The part operates over a voltage range of 2.5 to 6.0V. High throughput is achieved with an efficient, regular instruction set operating at a 1 microsecond per instruction rate.

## Features

- Low Cost 8-bit microcontroller
- Fully static CMOS
- 1  $\mu$ s instruction time (10 MHz clock)
- Low current drain (2.2 mA at 3  $\mu$ s instruction rate)  
Low current static HALT mode (Typically < 1  $\mu$ A)
- Single supply operation: 2.5 to 6.0V

- 1024 bytes ROM/64 Bytes RAM—COP820C family
- 2048 bytes ROM/128 Bytes RAM—COP840C family
- 16-bit read/write timer operates in a variety of modes
  - Timer with 16-bit auto reload register
  - 16-bit external event counter
  - Timer with 16-bit capture register (selectable edge)
- Multi-source interrupt
  - Reset master clear
  - External interrupt with selectable edge
  - Timer interrupt or capture interrupt
  - Software interrupt
- 8-bit stack pointer (stack in RAM)
- Powerful instruction set, most instructions single byte
- BCD arithmetic instructions
- MICROWIRE/PLUS serial I/O
- 28 pin package (optionally 20 pin package)
- 24 input/output pins (28-pin package)
- Software selectable I/O options (TRI-STATE<sup>®</sup>, push-pull, weak pull-up)
- Schmitt trigger inputs on Port G
- Temperature ranges: 0°C to +70°C, -40°C to +85°C, -55°C to +125°C
- Form Factor emulation devices
- Fully supported by MetaLink's development systems

## Block Diagram

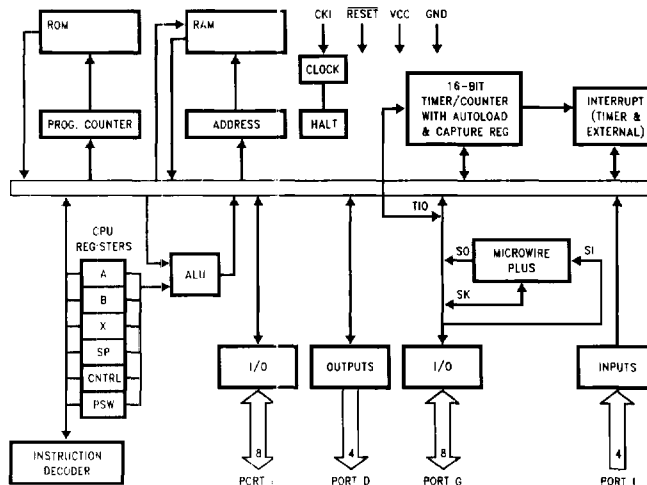


FIGURE 1

TL/DD/9103-1