


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

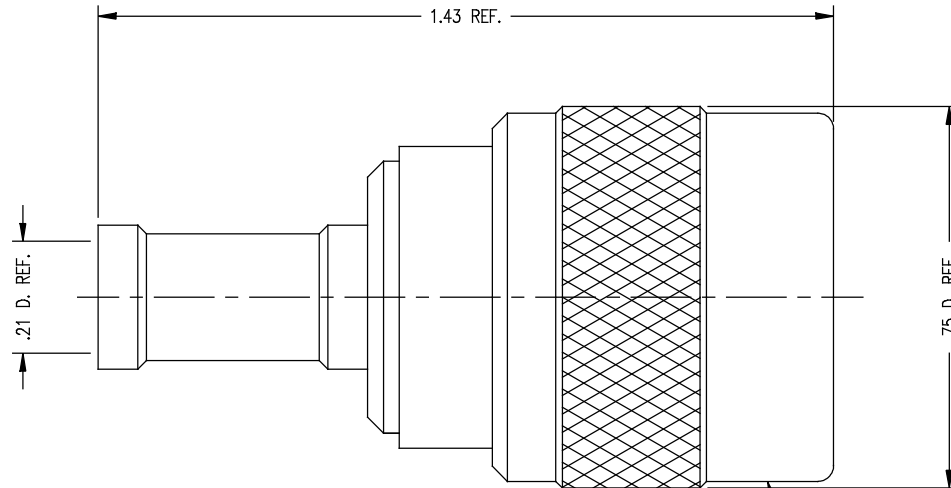

STAMP: KINGS KD-59-106

NOTES:

- FOR USE WITH RG-58, 141 & 303/U CABLES.
- FOR CABLING INSTRUCTIONS SEE CP-403.
- FOR CRIMPING USE DIE KTH-2061.
- INTERFACE PER MIL-STD-348, FIG. FIG. 302-1.
- MATERIALS:
 INSULATOR: TEFLON, ASTM-D-4894
 GASKET: SIL. RUB., ZZ-R-765
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 SPRING WASHER }
 OUTER CONTACT } BER. COP., ASTM-B-196
 ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
 SPRING WASHER }
 OUTER CONTACT } SILVER PLT. PER QQ-S-365
 CENTER CONTACT }
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

KD-59-106

REVISIONS

ISSUE	CHANGES
3	CN 24156 C KH 04/26/96

KAM6578

SCALE	4:1	
APPROX SURFACE AREA		
USED ON		
REF:		
PLUG, C		
DRAWN	KH	DATE 04/26/96
DESIGN	MJB	DATE 04/26/96
APPR.		DATE

GSD

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KD-59-106