


**SIDE ENTRY
Flangeless PCB Jack**

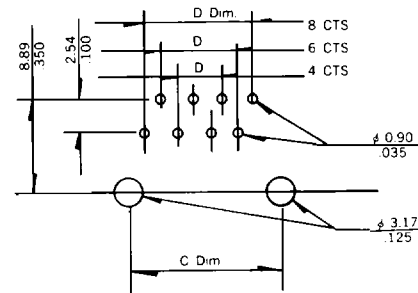

Mounting hole patterns for standard.

No. Of Positions	Dimensions			
	A	B	C	D
4	13.72 .540	11.18 .440	7.62 .300	3.81 .150
6	15.75 .620	13.21 .520	10.16 .400	6.35 .250
8	17.78 .700	15.24 .600	11.43 .450	8.89 .350

Technical Data

Housing: Standard Material Glass Filled Polyester UL94V-0
Standard Colour Black

Contact: 0.35mm (0.014") thickness Phosphor Bronze Alloy
Selective Gold Plating Over Nickel Overtin

Selective Gold Plating:

1. 0.38μ m/15μ inch minimum
2. 0.76μ m/30μ inch minimum
3. 1.27μ m/50μ inch minimum
4. 0.15μ m/6μ inch minimum
5. Palladium Wire

Ordering Data

Part Number	No. Of Positions	No. Of Contacts	Gold Plating	Part Number	No. Of Positions	No. Of Contacts	Gold Plating
9601-01	4	4	1	9602-14	6	4	4
9601-02	4	4	2	9602-15	6	4	5
9601-03	4	4	3	9602-21	6	2	1
9601-04	4	4	4	9602-22	6	2	2
9601-05	4	4	5	9602-23	6	2	3
9602-01	6	6	1	9602-24	6	2	4
9602-02	6	6	2	9602-25	6	2	5
9602-03	6	6	3	9618-01	8	8	1
9602-04	6	6	4	9618-02	8	8	2
9602-05	6	6	5	9618-03	8	8	3
9602-11	6	4	1	9618-04	8	8	4
9602-12	6	4	2	9618-05	8	8	5
9602-13	6	4	3				