



The CLS69273P is a Low PIM indoor wideband omnidirectional low-profile ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor coverage requirements at 698-960 MHz, and 1695-2700 MHz for the GSM, DCS, UMTS, AWS-3 and LTE/WiMAX frequency bands. The antenna features a pattern that has been specifically shaped to provide optimal performance from a ceiling mount location. The pattern is also very uniform and symmetrical, providing system integrators with the ability to precisely determine cell size.

### FEATURES AND BENEFITS

- Low profile aesthetically neutral housing
- Performance optimized using Laird proprietary RF optimization tools
- Mounts directly and easily to ceiling tile
- Excellent flame rating
- Supports AWS-3 frequency band

ELECTRICAL SPECIFICATIONS								
Operating Frequency (MHz)	698-806	824-894	880-960	1695-1880	1850-1990	1910-2170	2300-2500	2500-2700
Gain, Typ (dBi)	2.7	2.6	3.5	5.4	6.4	6.5	6.2	6.8
Gain, Max (dBi)	3.0	3.0	4.1	5.6	7.0	7.0	6.7	7.3
VSWR – Avg	<1.8:1	<1.6:1	<1.7:1	<1.9:1	<1.9:1	<1.7:1	<1.5:1	<1.3:1
VSWR – Max	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1
PIM - 2x20W, Typ (dBc)	<-156			<-156				
PIM - 2x20W, Max (dBc)	<-150			<-150				
Nominal Impedance (Ohms)	50							
Max Power - Ambient 25°C (W)	50							
Polarization	Vertical							
Horizontal Plane 3 dB Beamwidth	360°							

MECHANICAL SPECIFICATIONS	
Dimensions – diameter x height – mm (inches)	250 x 47.5 (9.84 X 1.87)
Weight – kg (lbs.)	0.45 (0.99)
Radome Material	PC / ABS, White

ENVIRONMENTAL SPECIFICATIONS	
Operating Environment (Indoor or Outdoor)	Indoor
Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Flammability Rating	UL94 V-0 rating
Material Substance Compliance	RoHS compliant

### CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR
CLS69273P-30NF	30 cm (12")	Type N female
CLS69273P-30D41F	30 cm (12")	4.1-9.5 female
CLS69273P-30D43F	30 cm (12")	4.3-10 female
CLS69273P-B30NF	30 cm (12")	Type N-female
CLS69273P-B30D41F	30 cm (12")	4.1-9.5 female
CLS69273P-B30D43F	30 cm (12")	4.3-10 female

MOUNTING OPTIONS



Standard - Twist & Lock Ceiling Mount:HKIT-CMx-0



Above Ceiling Mount:HKIT-CMx-001



Hard Ceiling Mount: HKIT-CMx-002







Above Ceiling Mount - Foam Standoff w/Adhesive:  
HKIT-CMx-004

RADIATION PATTERNS





698 MHz

824 MHz

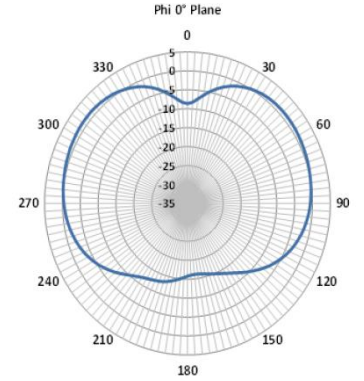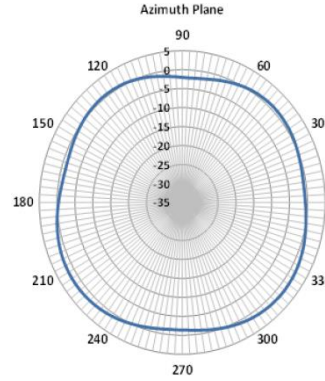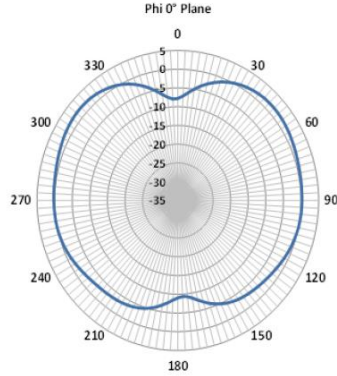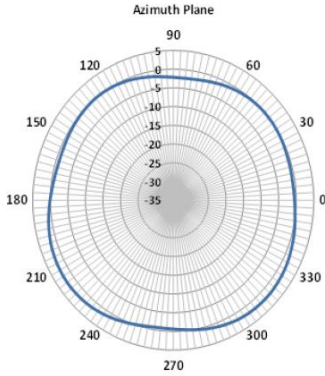





960 MHz

1710 MHz

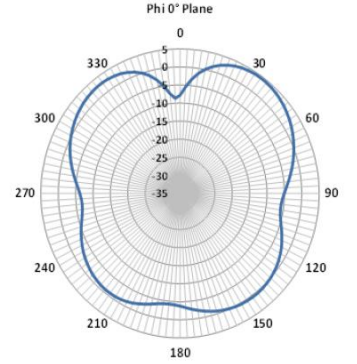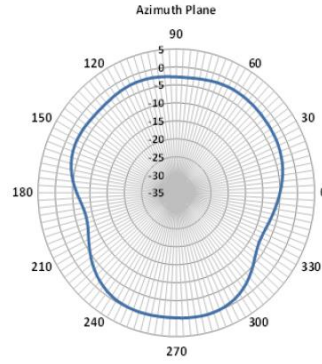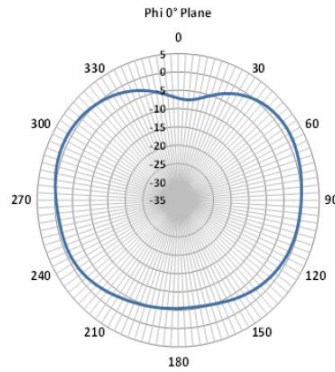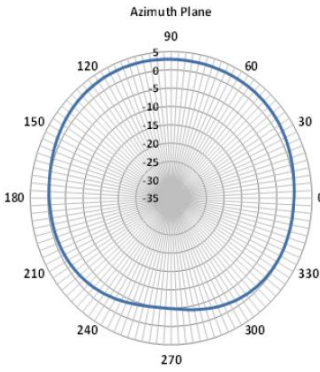



1880 MHz

2110 MHz

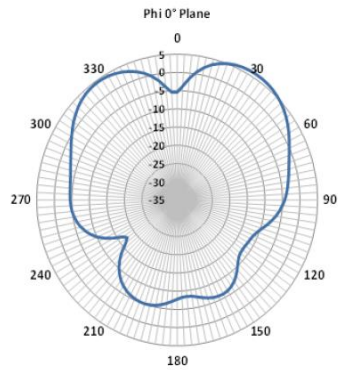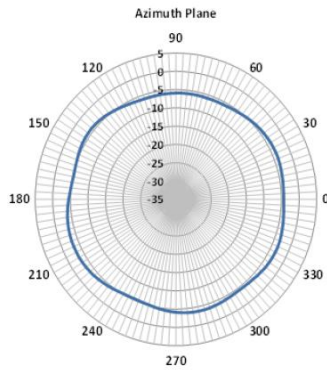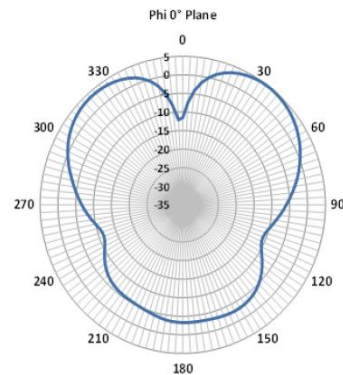
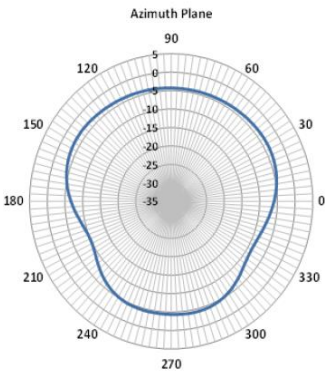


### RADIATION PATTERNS (continued)



#### 2305 MHz

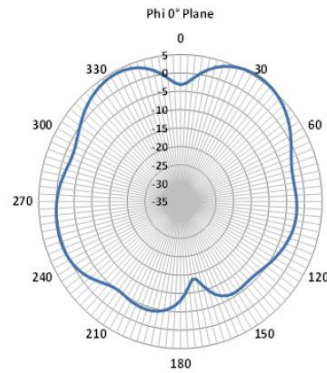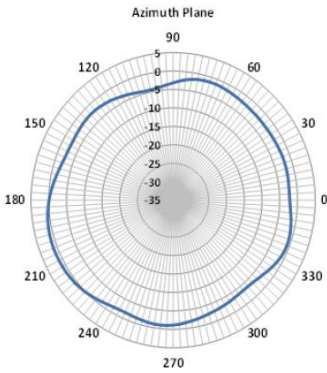

#### 2507 MHz

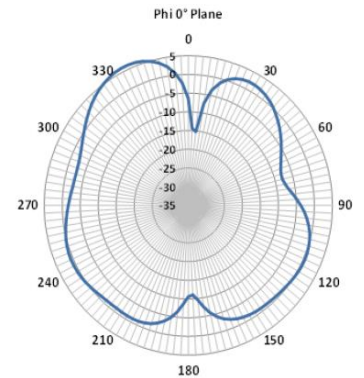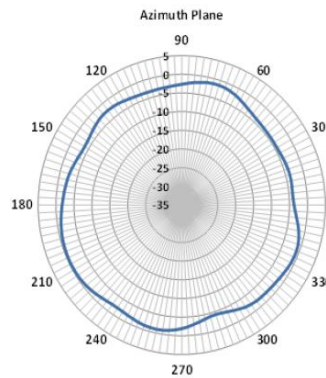

#### 2700 MHz

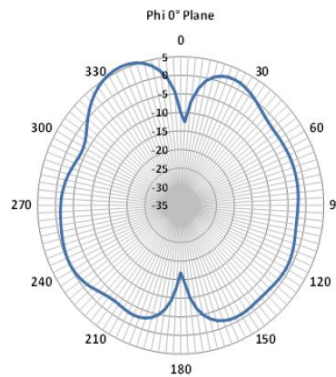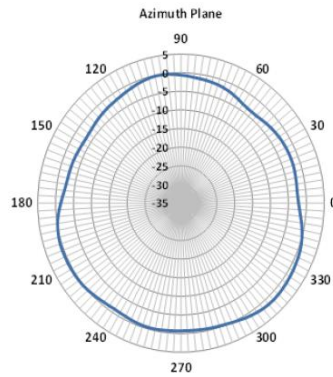

### ✓RoHS

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

sales@lairdconnect.com  
support@lairdconnect.com  
www.lairdconnect.com

