

7 mm Seven Segment Displays

Color	Type	Circuitry
Red	TDSR115.	Common anode
	TDSR116.	Common cathode
High efficiency red	TDSO115.	Common anode
	TDSO116.	Common cathode
Yellow	TDSY115.	Common anode
	TDSY116.	Common cathode
Green	TDSG115.	Common anode
	TDSG116.	Common cathode


Description

The TDS.11.. series are 7 mm character seven segment LED displays in a very compact package.

The displays are designed for a viewing distance up to 3 meters and available in four bright colors. The grey package surface and the evenly lighted untinted segments provide an optimum on-off contrast.

All displays are categorized in luminous intensity groups. That allows users to assemble displays with uniform appearance.

Typical applications include instruments, panel meters, point-of-sale terminals and household equipment.

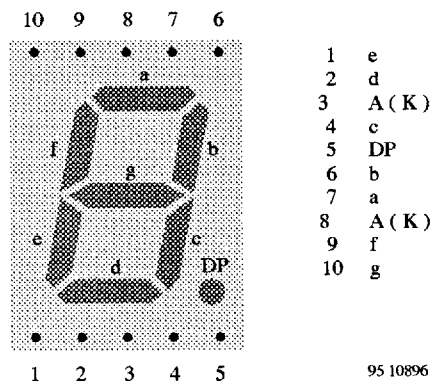

95 10896

Features

- Evenly lighted segments
- Grey package surface
- Untinted segments
- Luminous intensity categorized
- Yellow and green categorized for color
- Wide viewing angle
- Suitable for DC and high peak current

Applications

Panel meters
 Test- and measure- equipment
 Point-of-sale terminals
 Control units

TDS.11..

Absolute Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

TDSR115./TDSR116., TDSO115./TDSO116., TDSY115./TDSY116., TDSG115./TDSG116.

Parameter	Test Conditions	Type	Symbol	Value	Unit
Reverse voltage per segment or DP			V_R	6	V
DC forward current per segment or DP		TDSR115./116.	I_F	25	mA
		TDSO115./116.	I_F	17	mA
		TDSY115./116.	I_F	17	mA
		TDSG115./116.	I_F	17	mA
Surge forward current per segment or DP	$t_p \leq 10 \mu\text{s}$ (non repetitive)	TDSR115./116.	I_{FSM}	0.5	A
		TDSO115./116.	I_{FSM}	0.15	A
		TDSY115./116.	I_{FSM}	0.15	A
		TDSG115./116.	I_{FSM}	0.15	A
Power dissipation	$T_{amb} \leq 45^{\circ}\text{C}$		P_V	400	mW
Junction temperature			T_j	100	$^{\circ}\text{C}$
Operating temperature range			T_{amb}	-40 to +85	$^{\circ}\text{C}$
Storage temperature range			T_{stg}	-40 to +85	$^{\circ}\text{C}$
Soldering temperature	$t \leq 3 \text{ sec.}$, 2mm below seating plane		T_{sd}	260	$^{\circ}\text{C}$
Thermal resistance LED junction/ambient			R_{thJA}	140	K/W

Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Red (TDSR115., TDSR116.)

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Luminous intensity per segment (digit average) ¹⁾	$I_F = 10 \text{ mA}$	TDSR1150/1160	I_V	180			μcd
	$I_F = 10 \text{ mA}$	TDSR1151/1161	I_V	280		1400	μcd
Dominant wavelength	$I_F = 10 \text{ mA}$		λ_d		645		nm
Peak wavelength	$I_F = 10 \text{ mA}$		λ_p		660		nm
Angle of half intensity	$I_F = 10 \text{ mA}$		φ		± 50		deg
Forward voltage per segment or DP	$I_F = 20 \text{ mA}$		V_F		1.6	2	V
Reverse voltage per segment or DP	$I_R = 10 \mu\text{A}$		V_R	6	15		V

¹⁾ $I_{V_{min}}$ and I_V groups are mean values of segments a to g

High efficiency red (TDSO115., TDSO116.)

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Luminous intensity per segment (digit average) ¹⁾	I _F = 10 mA	TDSO1150/1160	I _V	450			μcd
	I _F = 10 mA	TDSO1151/1161	I _V	1100		5600	μcd
Dominant wavelength	I _F = 10 mA		λ _d		626		nm
Peak wavelength	I _F = 10 mA		λ _p		635		nm
Angle of half intensity	I _F = 10 mA		φ		±50		deg
Forward voltage per segment or DP	I _F = 20 mA		V _F		2	3	V
Reverse voltage per segment or DP	I _R = 10 mA		V _R	6	15		V

¹⁾ I_{Vmin} and I_V groups are mean values of segments a to g

Yellow (TDSY115., TDSY116.)

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Luminous intensity per segment (digit average) ¹⁾	I _F = 10 mA	TDSY1150/1160	I _V	450			μcd
	I _F = 10 mA	TDSY1151/1161	I _V	700		3600	μcd
Dominant wavelength	I _F = 10 mA		λ _d	581		594	nm
Peak wavelength	I _F = 10 mA		λ _p		585		nm
Angle of half intensity	I _F = 10 mA		φ		±50		deg
Forward voltage per segment or DP	I _F = 20 mA		V _F		2.4	3	V
Reverse voltage per segment or DP	I _R = 10 mA		V _R	6	15		V


¹⁾ I_{Vmin} and I_V groups are mean values of segments a to g

Green (TDSG115., TDSG116.)

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Luminous intensity per segment (digit average) ¹⁾	I _F = 10 mA	TDSG1150/1160	I _V	450			μcd
	I _F = 10 mA	TDSG1151/1161	I _V	1100		5600	μcd
Dominant wavelength	I _F = 10 mA		λ _d	562		575	nm
Peak wavelength	I _F = 10 mA		λ _p		565		nm
Angle of half intensity	I _F = 10 mA		φ		±50		deg
Forward voltage per segment or DP	I _F = 20 mA		V _F		2.4	3	V
Reverse voltage per segment or DP	I _R = 10 μA		V _R	6	15		V


¹⁾ I_{Vmin} and I_V groups are mean values of segments a to g

Typical Characteristics ($T_{amb} = 25^{\circ}C$, unless otherwise specified)

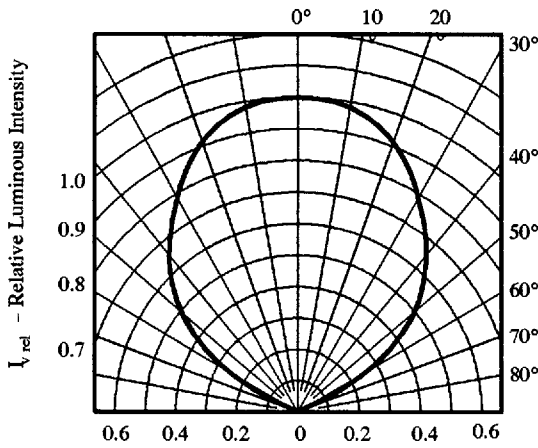


95 10082

Figure 1. Rel. Luminous Intensity vs. Angular Displacement

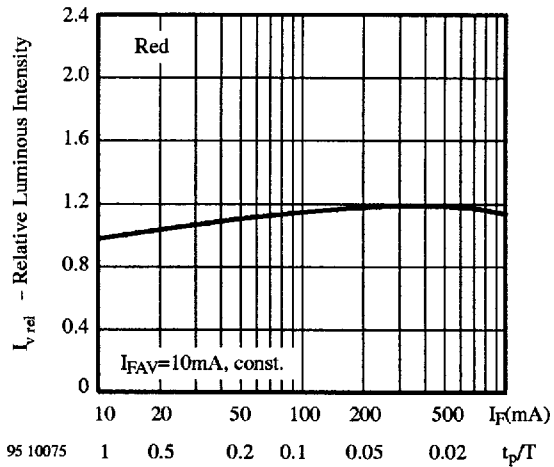


95 10075

Figure 4. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

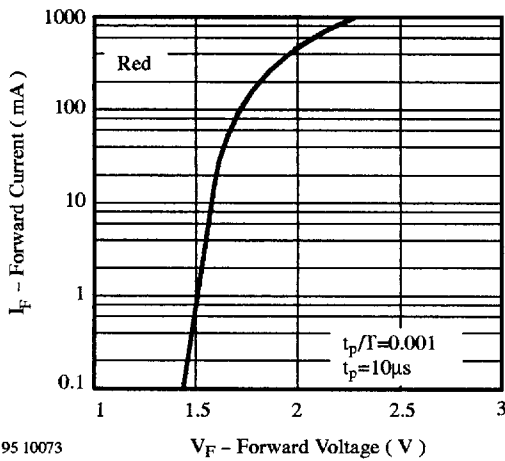


95 10073

Figure 2. Forward Current vs. Forward Voltage

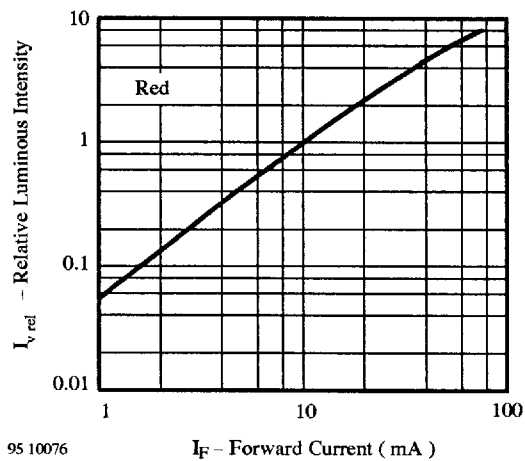


95 10076

Figure 5. Relative Luminous Intensity vs. Forward Current

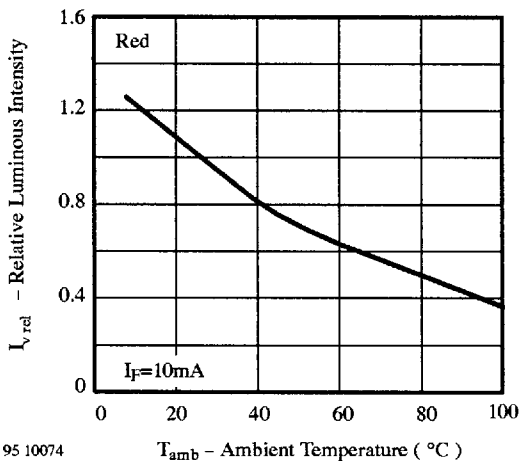

95 10074

Figure 3. Rel. Luminous Intensity vs. Ambient Temperature

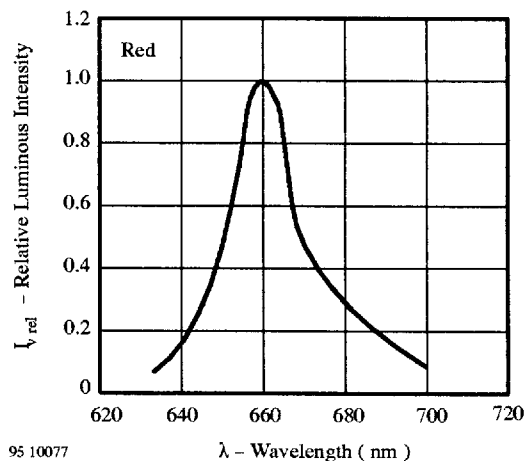

95 10077

Figure 6. Relative Luminous Intensity vs. Wavelength

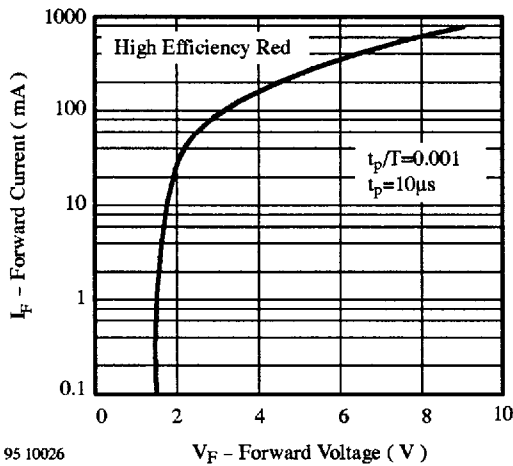


Figure 7. Forward Current vs. Forward Voltage

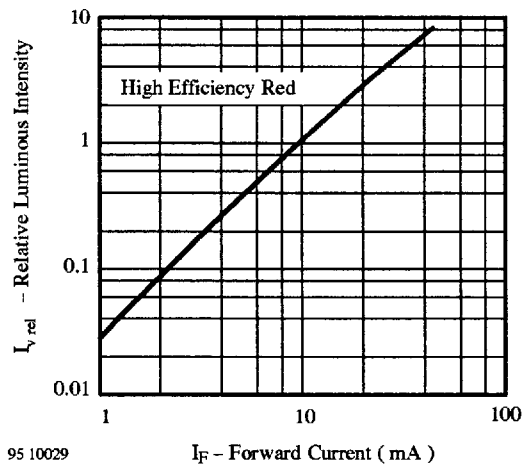


Figure 10. Relative Luminous Intensity vs. Forward Current

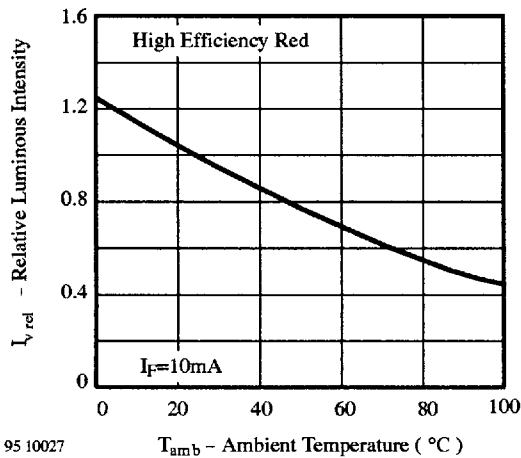


Figure 8. Rel. Luminous Intensity vs. Ambient Temperature

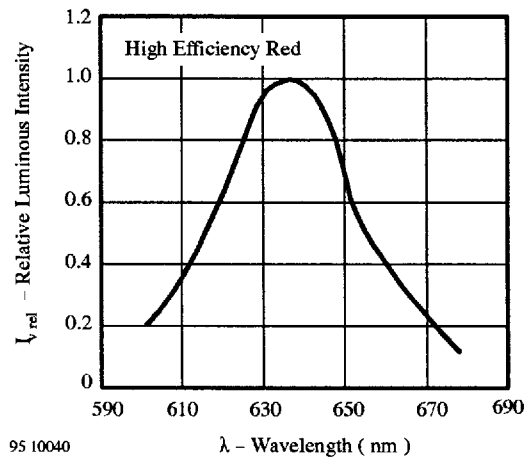


Figure 11. Relative Luminous Intensity vs. Wavelength

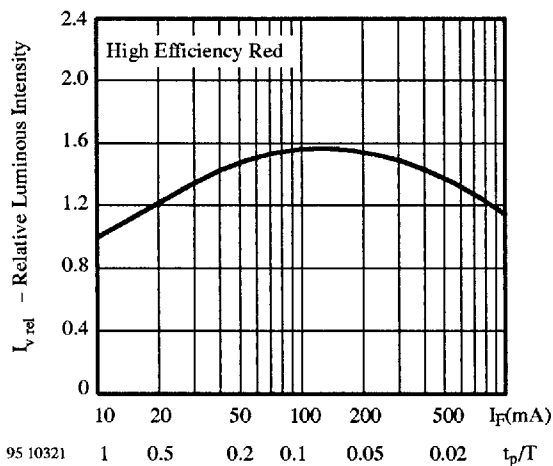


Figure 9. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

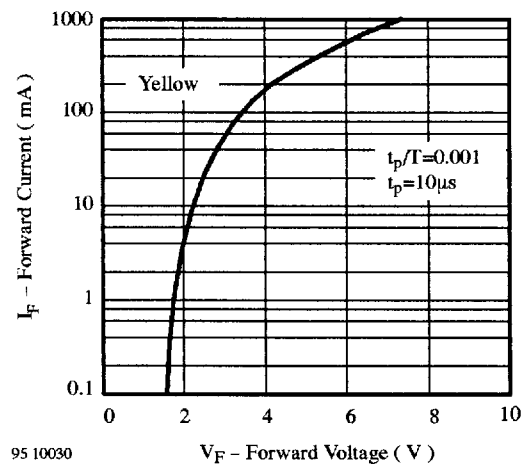


Figure 12. Forward Current vs. Forward Voltage

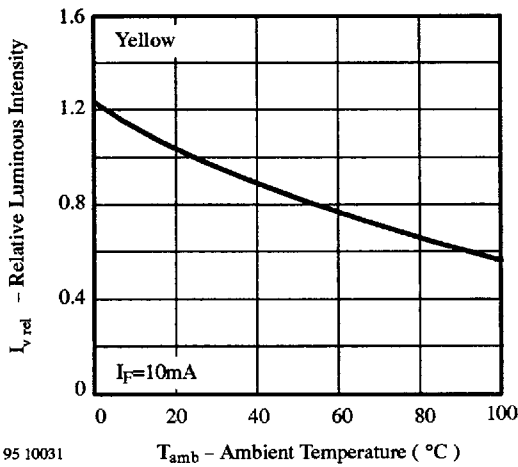


Figure 13. Rel. Luminous Intensity vs. Ambient Temperature

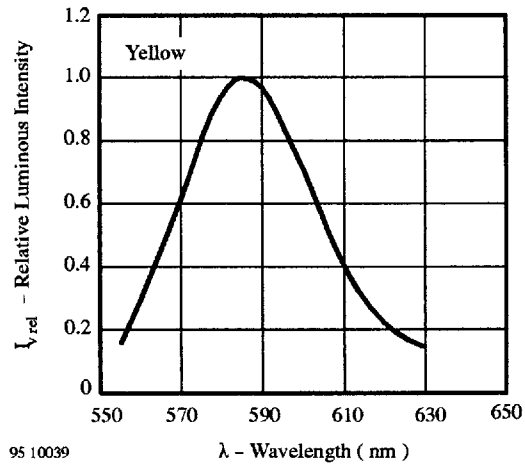


Figure 16. Relative Luminous Intensity vs. Wavelength

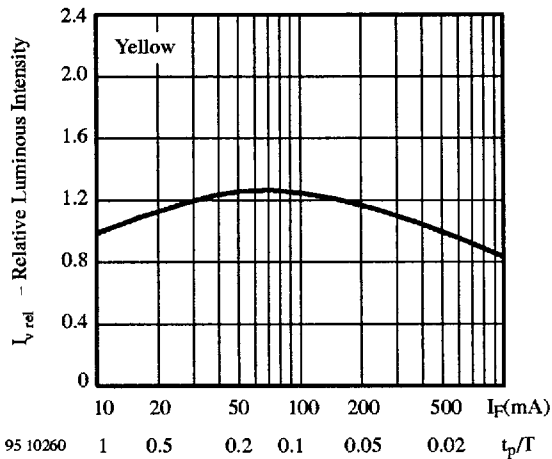


Figure 14. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

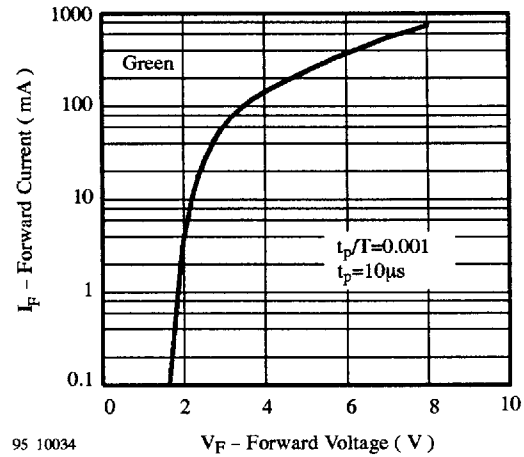


Figure 17. Forward Current vs. Forward Voltage

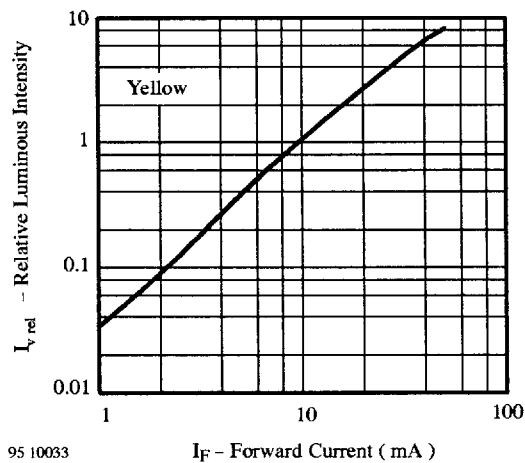


Figure 15. Relative Luminous Intensity vs. Forward Current

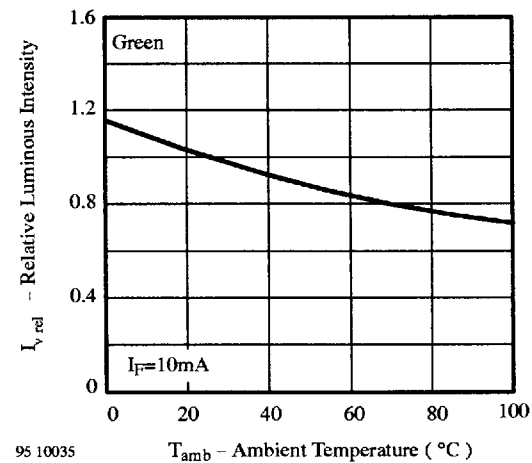


Figure 18. Rel. Luminous Intensity vs. Ambient Temperature

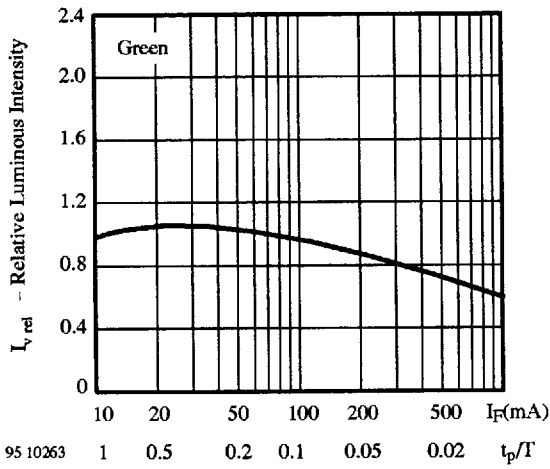


Figure 19. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

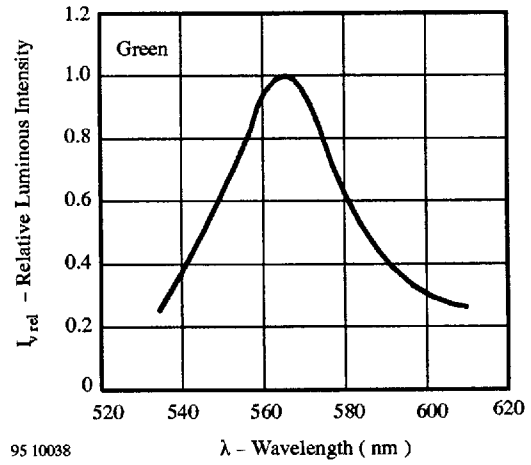


Figure 21. Relative Luminous Intensity vs. Wavelength

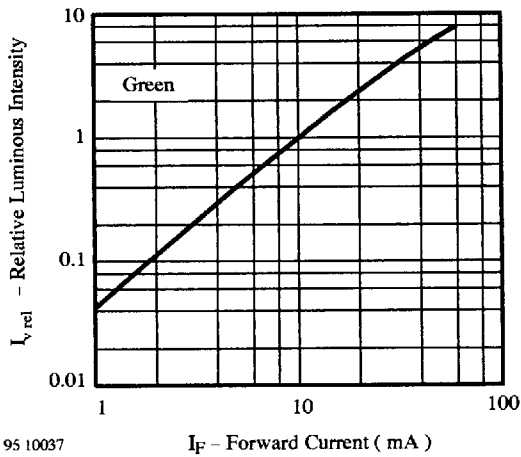


Figure 20. Relative Luminous Intensity vs. Forward Current