- Competitively priced
- Industry Compatible
- PCB Mounting or Wire Soldering

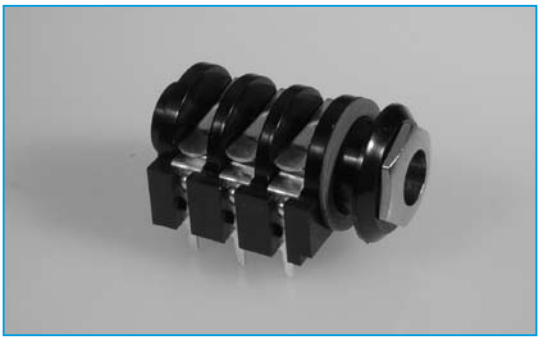

SPECIFICATION

Contact resistance (DCR 0.1A)		
1, Initial, before any testing:	(1) Between the terminals (NC): 30mΩ (2) Plug to sleeve, tip ,ring (NO) contact: 50mΩ	
2, After life test with mating plug:	(1) Between the terminals (NC): 60mΩ (2) Plug to sleeve, tip, ring (NO) contact: 100mΩ	
Insertation Force:	0.3kg - 3.0kg	Terminals must withstand a 500g minimum pull for 10 seconds
Extraction Force:	0.3kg - 3.0kg	before movement or break from housing occurs
Soldering Heat:	Terminal for PC board temperature: 260 ± 5˚C for 5 ± 1.0 seconds	
Operating Temperature range:	-25˚C to 100˚C	
Insulating Resistance:	More than 100MΩ by 500v DC at 90 - 95% RH, 40˚C	
Voltage Test:	Withstand 0.5mA 500v AC between any open terminal for one minute	
Lifetime:	Withstand more than 5000 cycle's insertion and withdrawal with testing plug	
Rated Voltage:	16vdc	
Rated Current:	20mA - 0.3A	

OUTLINE DRAWING

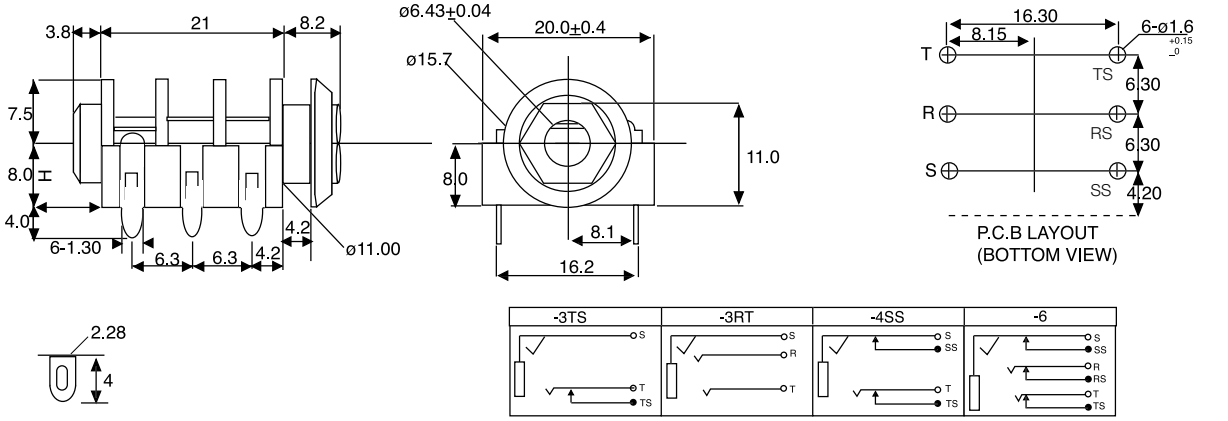

ORDERING INFORMATION

DBC	HJ	0664		-3TS
Dubilier Connectors	6.4Ø Earphone Socket Connector	Series	Pin Configuration Blank = PCB Type S = Wire Soldering	Contacts -3RT -3TS -4SS –6