

## 1.5 WATTS UNREGULATED DC/DC CONVERTERS

### PWR13XXC

ISO9001  
CERTIFIED



#### FEATURES

- ROHS COMPLIANT
- HIGH ISOLATION - 4000V RATING
- 8000V ISOLATION TEST VOLTAGE
- BARRIER 100% PRODUCTION TESTED
- LOW BARRIER CAPACITANCE - 10PF
- LOW LEAKAGE CURRENT - 2 $\mu$ A MAX
- 24-PIN DIP PACKAGE
- INTERNAL FILTERING

#### APPLICATIONS

- BIOMEDICAL DATA ACQUISITION
- INDUSTRIAL PROCESS CONTROL
- ANALYTICAL MEASUREMENTS
- GROUND LOOP ELIMINATION
- INTRINSIC SAFETY SYSTEMS

#### DESCRIPTION

The PWR13XXC Series offers a broad line of low-cost, high-isolation voltage, unregulated, single and dual output DC/DC converters in a 24-pin DIP package. These small converters offer a 4000V isolation rating in a 1.25" x 0.8" package area.

The dielectric withstand characteristics of each converter is tested in production to ensure barrier integrity. During the development of the PWR13XXC Series extensive testing was done to verify that subjecting the barrier to as many as ten barrier tests will not destroy the barrier.

The PWR13XXC Series uses advanced circuit design and packaging technology to realize superior reliability and performance. A 220kHz driven push-pull oscillator is used to ensure stable frequency and non-saturating operation of the input stage. This means there are no high peak voltages or currents like other design topologies, which can reduce unit reliability. Reliability is

further enhanced by the use of MOSPOWER transistors. These rugged devices permit higher frequency operation with less complicated drive circuitry than is possible with bipolar power transistors. Reduced parts count adds to the reliability of the PWR13XXC Series.

The high efficiency of the PWR13XXC Series means less internal power dissipation. With less heat to dissipate, the PWR13XXC Series can operate over a wider ambient temperature range with no degradation of reliable operation.

The PWR13XXC Series offers the user low cost without sacrificing reliability. The use of surface mounted devices and manufacturing technologies make it possible to offer premium performance and low cost. Testing of the PWR13XXC isolation barrier is performed per the methods set forth by UL544, VDE750, CSA 22.2 and IEC 601-1.

Website: <http://www.cd4power.com>



Power Electronics Division, United States  
3400 E Britannia Drive, Tucson, Arizona 85706  
Phone: 520.295.4100 Fax: 520.295.4197

C&D Technologies, (NCL)  
Milton Keynes MK14 5BU UK  
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

# ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise noted.

MODEL	NOMINAL INPUT VOLTAGE (Vbc)	RATED OUTPUT VOLTAGE (Vbc)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)
				NO LOAD (mA)	RATED LOAD (mA)	
PWR1300AC	5	5	300	50	400	30
PWR1301AC	5	12	125	50	400	30
PWR1302AC	5	15	100	50	400	30
PWR1303AC	5	±5	±150	50	400	30
PWR1304AC	5	±12	±63	50	400	30
PWR1305AC	5	±15	±50	50	400	30
PWR1306AC	12	5	300	30	167	25
PWR1307AC	12	12	125	30	167	25
PWR1308AC	12	15	100	30	167	25
PWR1309AC	12	±5	±150	30	167	25
PWR1310AC	12	±12	±63	30	167	25
PWR1311AC	12	±15	±50	30	167	25
PWR1312AC	15	5	300	30	133	20
PWR1313AC	15	12	125	30	133	20
PWR1314AC	15	15	100	30	133	20
PWR1315AC	15	±5	±150	30	133	20
PWR1316AC	15	±12	±63	30	133	20
PWR1317AC	15	±15	±50	30	133	20

# COMMON SPECIFICATIONS

Specifications typical at  $T_A = +25^\circ\text{C}$ , rated input voltage, rated output current unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>INPUT</b> Voltage Range		4.5 10.8 13.5	5 12 15	5.5 13.2 16.5	V <sub>DC</sub> V <sub>DC</sub> V <sub>DC</sub>
<b>ISOLATION</b> Rated Voltage Test Voltage Resistance Capacitance Leakage Current	60 Hz, 60 Seconds  Viso= 240VAC, 60Hz	4,000 8,000	10 10 1	2	V <sub>DC</sub> V <sub>pk</sub> GΩ pF μArms
<b>OUTPUT</b> Rated Power Voltage Setpoint Accuracy Ripple & Noise	Rated Load, Nominal V <sub>in</sub> BW = DC to 10MHz BW = 10Hz to 2MHz		1.5 40 10	±5	Watts % mVp-p mVrms
<b>REGULATION</b> Line Regulation Load Regulation	High Line to Low Line See Performance Curves		1.5		%/%
<b>GENERAL</b> Efficiency Switching Frequency Package Weight MTTF per MIL-HDBK-217, Rev. E Ground Benign Fixed Ground Naval Sheltered Airborne Uninhabited Fighter	Circuit Stress Method T <sub>A</sub> = +25°C T <sub>A</sub> = +85°C T <sub>A</sub> = +35°C T <sub>A</sub> = +35°C T <sub>A</sub> = +35°C		75 220 12 2,000,000 90,000 540,000 300,000 55,000		% kHz g Hr Hr Hr Hr Hr
<b>TEMPERATURE</b> Specification Operation Storage		-40 -55 -55	+25	+85 +100 +110	°C °C °C


## ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Duration ..... 5 seconds  
 Internal Power Dissipation ..... 750mW  
 Lead Temperature (soldering, 10 seconds max) ..... +300°C

## ORDERING INFORMATION

Device Family \_\_\_\_\_ PWR 13XX A C  
 PWR indicates DC/DC converter  
 Model Number \_\_\_\_\_  
 Selected from Table of Electrical Characteristics  
 Package \_\_\_\_\_  
 RoHS Compliant \_\_\_\_\_

## MECHANICAL

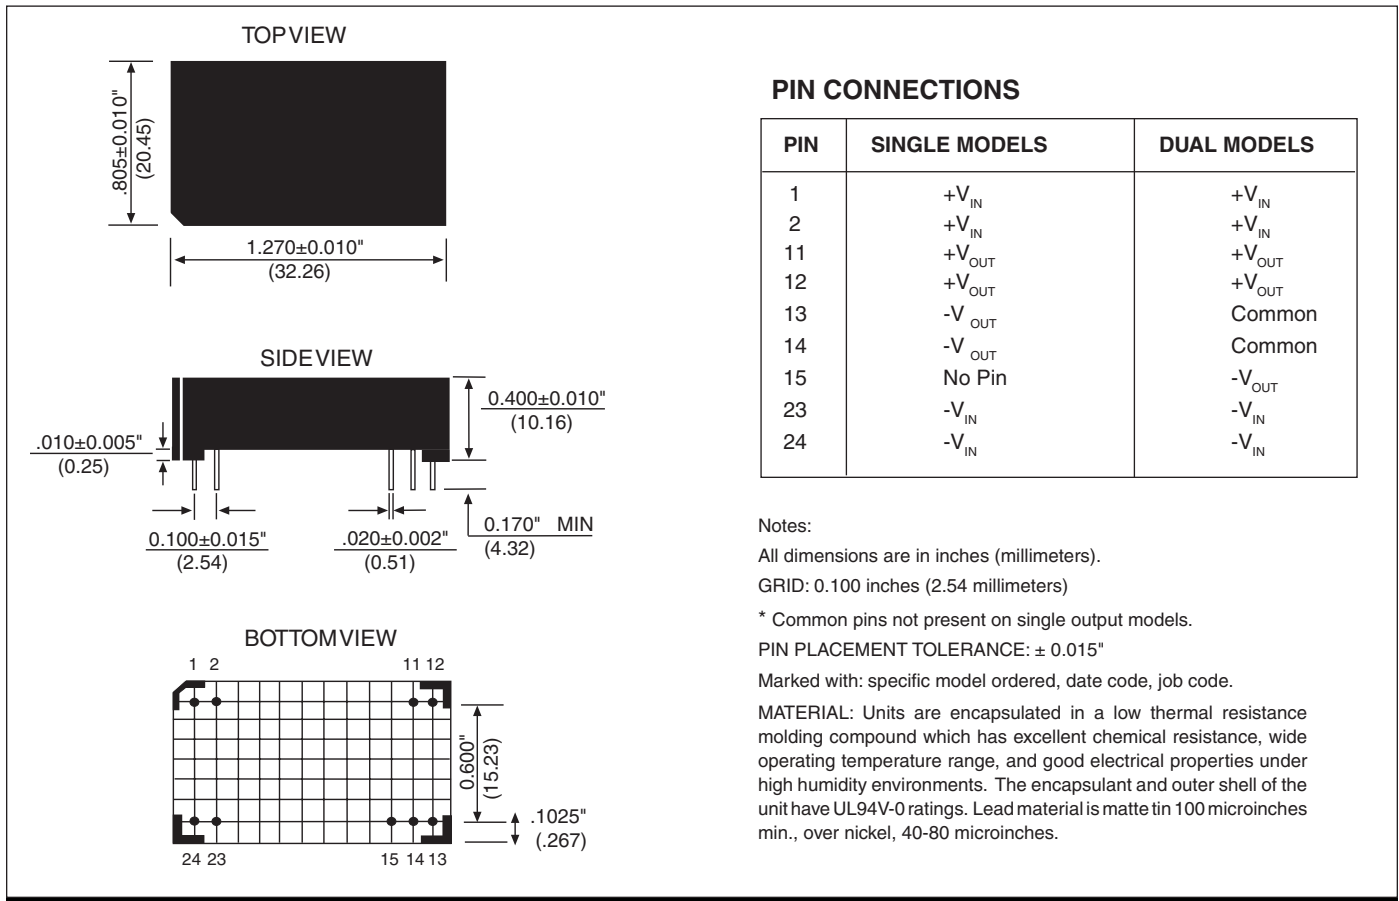







## SOLDERING INFORMATION

The PWR13XXC devices are intended for wave soldering or manual soldering.  
**They are not intended to be subject to surface mount processes under any circumstances.**

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

# TYPICAL PERFORMANCE CURVES

Specifications at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current

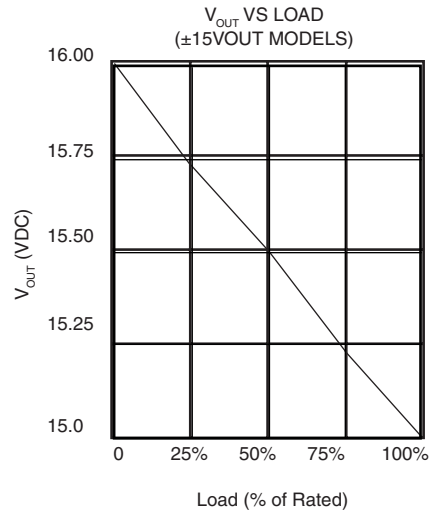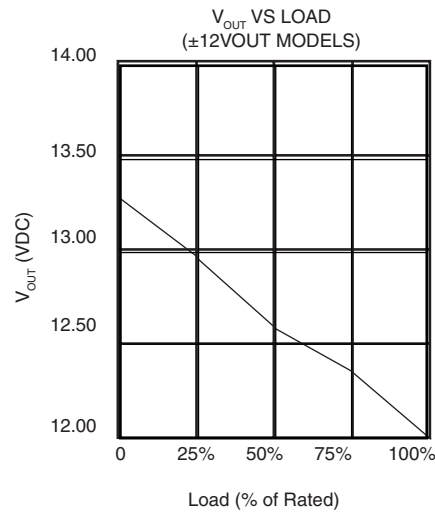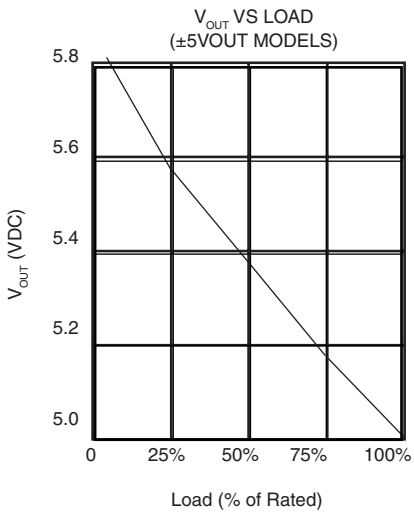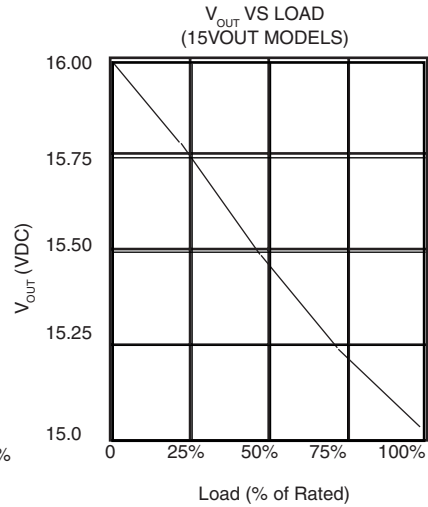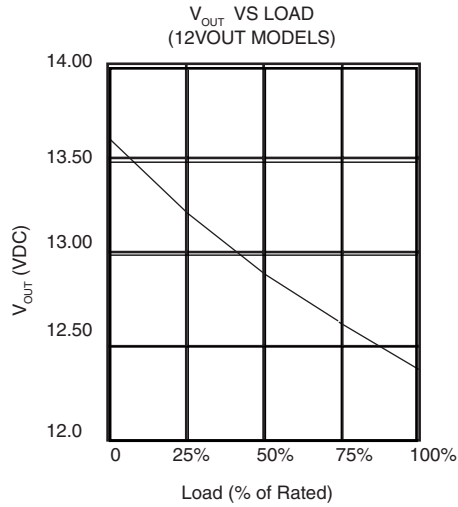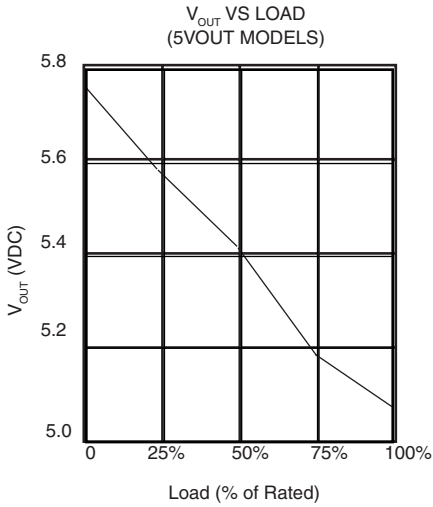

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.