


General Specifications

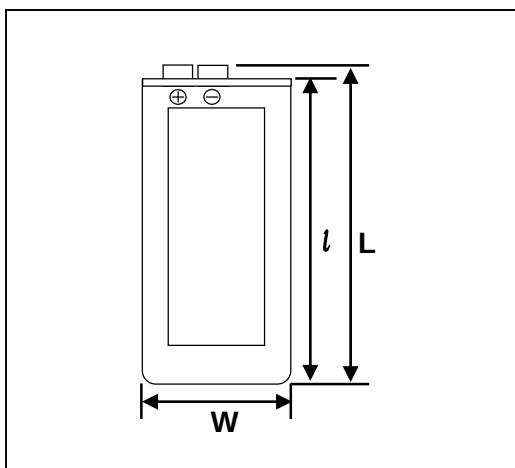

Nominal Voltage (V)		3
Nominal Capacity (mAh) ^{*2}		25
Standard Discharge Current (mA)		0.25
Operating Temperature Range (°C)		-10 ~ +60
Max. Dimensions (mm)	Length(L(l))	42.5(39.5)
	Width (W)	20.5
	Thickness (T)	0.45
Approx. Weight (g)		0.5

*1 (N) stands for; Positive Electrode Tab = Nickel-plated Stainless Steel
Negative Electrode Tab = Nickel Copper Alloy


- * Expected life is 5 years at room temperature.
- * Consult with FDK about installation method.
- *2 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

Note) Battery Handling Precautions


English) http://www.fdk.com/battery/lithium_e/handling_precaution.html
Japanese) http://www.fdk.co.jp/battery/lithium/handling_precaution.html

Typical Characteristics


Temperature Discharge Characteristics

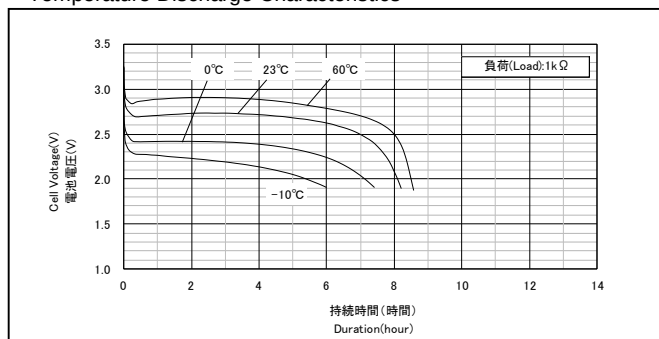


Temperature Discharge Characteristics

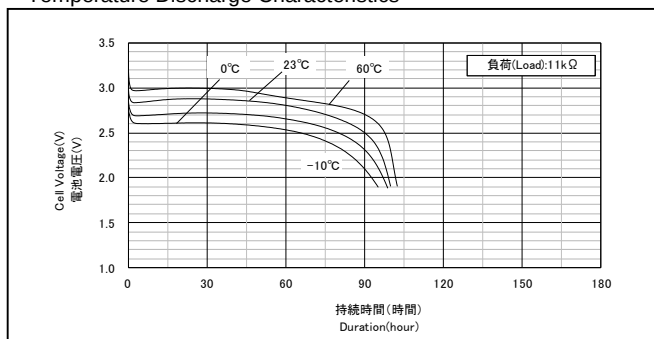


Temperature Discharge Characteristics

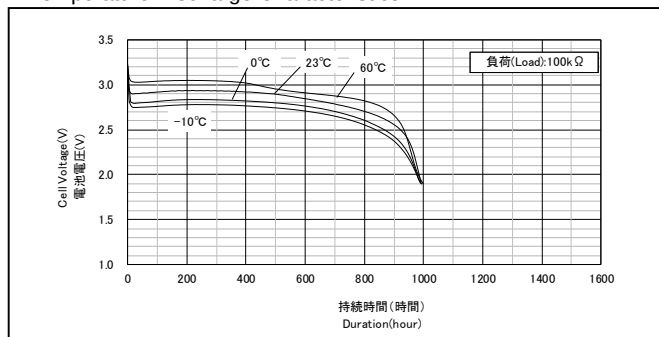

Discharge Characteristics after Storage

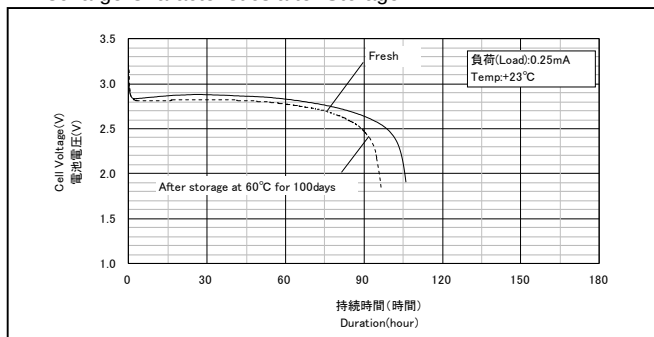

Discharge Load vs. Capacity

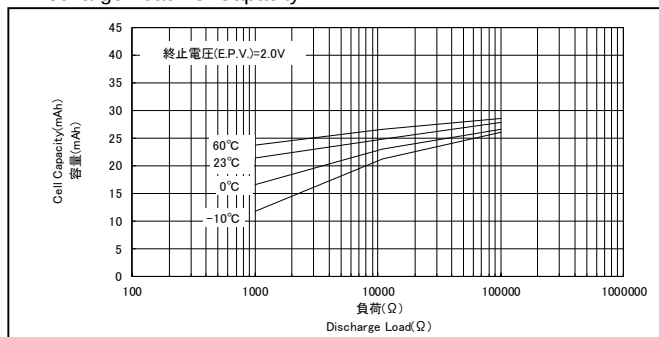

Discharge Load vs. Operating Voltage

