

PEAD18038BH PF00

[Download Datasheet](#)



ENTER QTY:

VIEW PRICE

Need assistance?
 Call us: 1-855-32-AAVID
 Email: estore@aavid.com

[» Help Page](#)

[> Request a Sample](#)
[> Request a Quote](#)
[> Ask an Engineer](#)


The Fine Print
[Product Return Policy](#)
[Terms & Conditions](#)
[Privacy Policy](#)




80 x 80 x 38

- UL 1430 AWG #24 or Equivalent
- Red Wire: Positive (+)
- Black Wire: Negative (-)
- Yellow Wire: FG Signal
- White Wire: RD Signal
- Blue Wire: PWM

Function Type: Restart Protection - Frequency Generation Signal
 Bearing Type: Ball
 Polarity Reverse Protection
 Nominal Wire Length: 250
 Rated Voltage VDC: 12V
 Operating Voltage VDC: 6~13.2
 Rated Current: 3.88AMP
 Input Current: 3.10AMP
 Input Power: 37.20Watt
 Rated Speed: 10 200
 Air Flow CMM: 3.81
 Air Flow CFM: 134.50
 Air Pressure mmH2O: 49.91
 Air Pressure InH2O: 1.97
 Noise dBA: 65.50
 Max Noise: 66.80
 MTBF: 70 000(hours @ 45 Deg C)

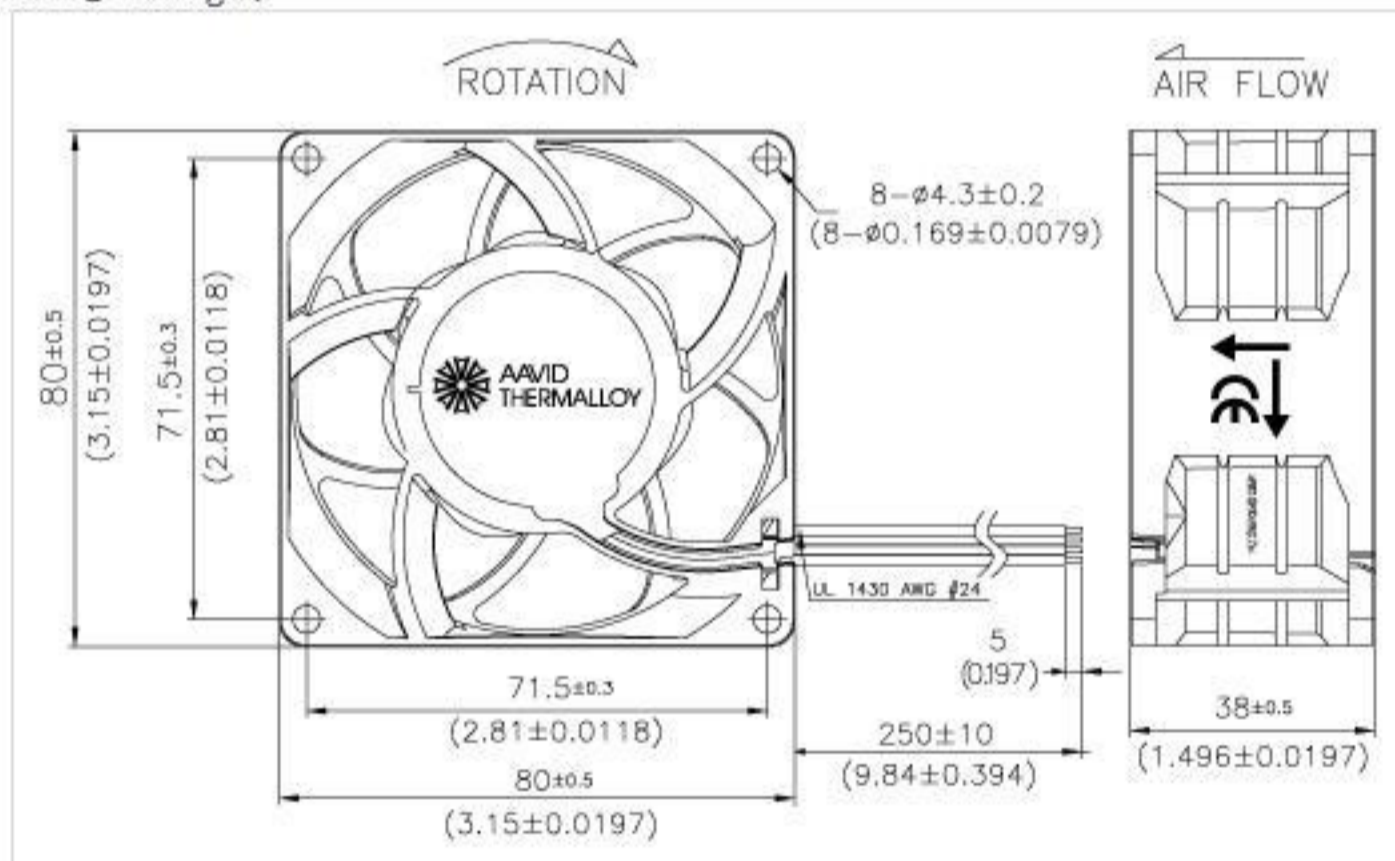

Thermal Curve:

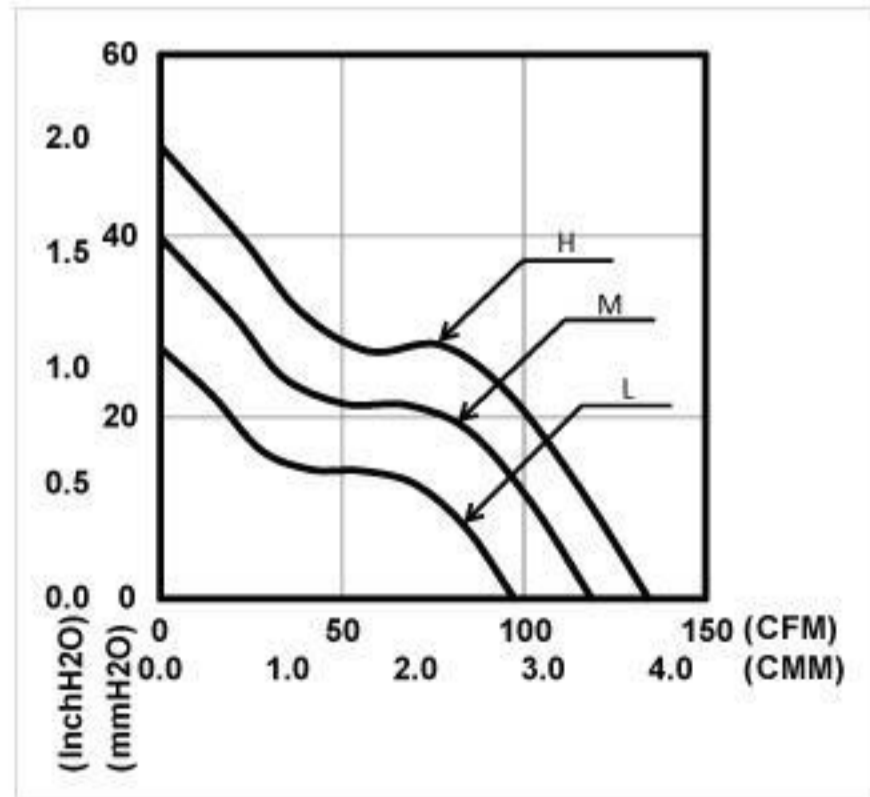

Customer Assistance

- [Contact Us](#)
- [Find a Distributor](#)
- [Find a Sales Rep](#)
- [Request a Quote](#)
- [Get Design Assistance](#)
- [Terms and Conditions](#)
- [Returns](#)

Popular Products

- [Fans Heat Sinks](#)
- [Extrusions](#)
- [Board Level](#)
- [Liquid Cooling](#)
- [Heat Pipe Technology](#)
- [Heat Sink Accessories](#)
- [Interface Materials](#)

Our Company

- [News and Events](#)
- [Management Team](#)
- [Worldwide Locations](#)
- [Disclaimer](#)
- [Customer Survey](#)
- [Privacy Policy](#)
- [Careers](#)

Connect with Aavid

Like / Follow / Connect