


L 366 200 11 P.C.B. connectors

► Expert Range - Insulation displacement connection (A.D.O.)



Male plug.
Wires parallel to connection.



Plug
TILE SHAPE

Body : UL94 V0 - PA
Grey



1.5 mm² - Spacing 7.62 mm .300"

Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0060	50	15.14	1SSA 366 202 R1100
3	0.0100	50	22.76	1SSA 366 203 R1100
4	0.0130	50	30.38	1SSA 366 204 R1100
5	0.0160	50	38.00	1SSA 366 205 R1100
6	0.0190	50	45.62	1SSA 366 206 R1100
10	0.0320	50	76.10	1SSA 366 210 R1100


Other numbers of poles, consult us




Technical data

	IEC	UL	CSA
Wire size			
Solid wire	0.34-1.5 mm ² *		
Stranded wire With ferrule	0.34-1.5 mm ² *		
Rated voltage	500 V		
Pollution degree	3		
Rated current	16 A		
Short-circuit current			
Rated wire size / Gauge	1.5 mm ²		
Storage temperature range		-20 ~ +80 °C	
Insulation resistance		≥ 10 ⁹ Ω	
Wire stripping length			
Recommended screwdriver			
Protection		IP 20 / NEMA 1	


* 1 or 2 wires (same wire size) per A.D.O. jaw.




Plug L 366 200 11 compatible with :



L 266 200 11



L 267 200 11




L 276 200 11

Accessories


Rep.	Description	Type	Order code	Spacing	Packaging	Weight kg
1	Manual tool	OUMAD	1SNA 179 466 R0600		1	0.0290
2	Semi-automatic tool	OUPAD	1SNA 178 944 R0400		1	0.2050
3	Pneumatic tool	OUTAD	1SNA 205 710 R1100		1	0.5000
4	Extraction tool	EXAD2	1SNA 205 721 R0000		1	0.0290
5	Removable head kit	OUTA	1SNA 205 284 R0300		1	0.0290
6	Coding peg	yellow ■ COCE	1SNA 199 321 R0100		10	0.0010
7	Cable clamp plug 3 poles	black ■ PT1	1SSS 299 253 R2200	7.62 mm	20	0.0016
8	Cable clamp plug 8 poles	black ■ PT2	1SSS 299 254 R2200	7.62 mm	20	0.0018
9	Snap in mounting foot	grey □	1SSA 299 257 R0000		20	0.0001

Other versions, please consult us :


Male plugs with brackets.




L 366 200 21

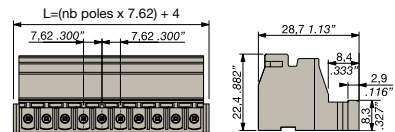


Male plugs with flanges and inserts.



L 366 200 31

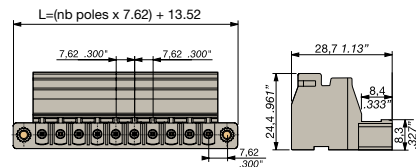

Male plugs with flanges and inserts.



L 366 200 41

