



INDUSTRIAL CERMET TRIMMERS



■ 9498269 0003552 496 ■ DEI

3/4" RECTANGULAR, MULTITURN, CERMET, SIDE ADJUST, TRANSPARENT



MODEL T18T

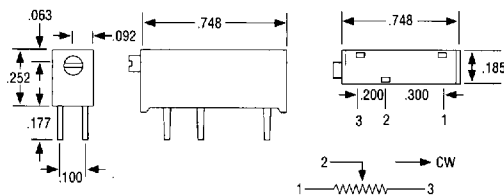

Resistance Range: 10Ω to 2Megohms
Resistance Tol: ±10%
TCR: ±100ppm/°C, -55 to +155°C
Power Rating: 0.75w at 70°C
Electrical Travel: 15 turns
Operating Torque: 3oz.-in. max.
Stop Torque: clutch, wiper idles
Rotational Life: >200 cycles
Sealing: Non-immersible

1/4" SQUARE, SINGLE TURN, CERMET, SIDE ADJUST


MODEL TX

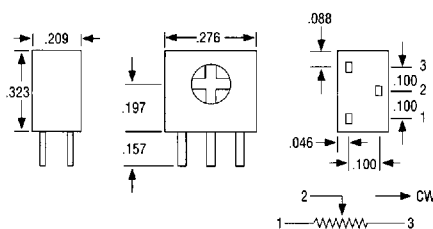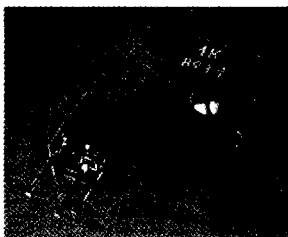

Resistance Range: 10Ω to 2Megohms
Resistance Tol: ±10%
TCR: ±100ppm/°C, -55 to +155°C
Power Rating: 0.5w at +85°C
Electrical Travel: 260°
Operating Torque: 3oz.-in. max.
Stop Torque: 5.6oz.-in. min.
Rotational Life: >200 cycles
Sealing: Fully immersible

1/4" SQUARE, SINGLE TURN, CERMET, SIDE ADJUST



MODEL TXD

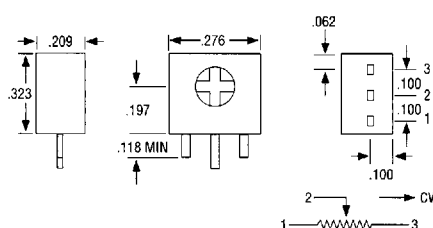

Resistance Range: 10Ω to 2Megohms
Resistance Tol: ±10%
TCR: ±100ppm/°C, -55 to +155°C
Power Rating: 0.5w at +85°C
Electrical Travel: 260°
Operating Torque: 3oz.-in. max.
Stop Torque: 5.6oz.-in. min.
Rotational Life: >200 cycles
Sealing: Fully immersible

1/4" SQUARE, SINGLE TURN, CERMET, TOP ADJUST



MODEL TYA

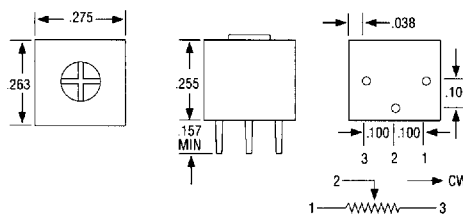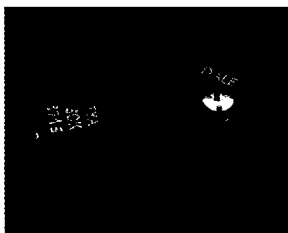

Resistance Range: 10Ω to 2Megohms
Resistance Tol: ±10%
TCR: ±100ppm/°C, -55 to +155°C
Power Rating: 0.5w at +85°C
Electrical Travel: 260°
Operating Torque: 3oz.-in. max.
Stop Torque: 5.6oz.-in. min.
Rotational Life: >200 cycles
Sealing: Fully immersible

1/4" SQUARE, SINGLE TURN, CERMET, TOP ADJUST

MODEL TYD

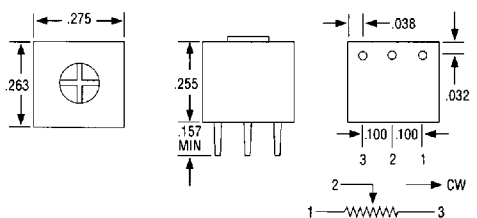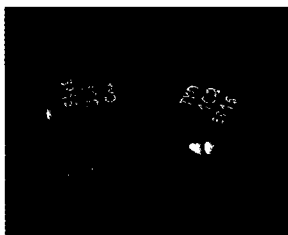

Resistance Range: 10Ω to 2Megohms
Resistance Tol: ±10%
TCR: ±100ppm/°C, -55 to +155°C
Power Rating: 0.5w at +85°C
Electrical Travel: 260°
Operating Torque: 3oz.-in. max.
Stop Torque: 5.6oz.-in. min.
Rotational Life: >200 cycles
Sealing: Fully immersible