


V23100V4012A001 Product Details



V23100V4012A001
(1393763-7)

TE Internal Number: 1393763-7

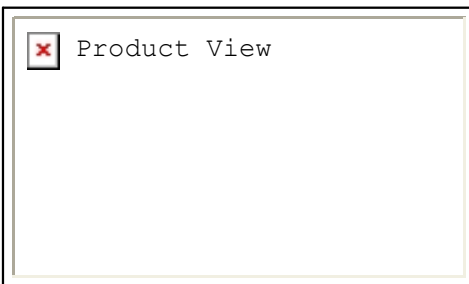

Communications/Signal PC Board Relays

[Not reviewed for RoHS Compliance](#)

Product Highlights:

- V23100-V4 / Dry Reed relay DIP & SIL Series
- DC Actuating System
- Input Voltage = 12 VDC
- Contact Arrangement = 1 Form A, SPST-NO, 1 N/O
- Contact Current Rating = .5 Amps.

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

 [Add to My Part List](#)
 [Request Sample](#)
 [Find Similar Products](#)
 [Buy Product](#)

[Contact Product Information Center](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • AXICOM Telecom-, Signal-and RF Relays (PDF, English) • TELECOM AND SIGNAL RELAYS (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • Reed Relay Datasheet (PDF, English) <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
<p>List all Documents</p>	

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Termination Type = Through Hole <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Actuating System = DC • Input Voltage (VDC) = 12 • Contact Current Rating (Amps.) = 0.5 • Coil Resistance (?) = 1000 • Coil Power, Nominal (mW) = 144 • Dielectric Between Coil and Contacts (V rms) = 1500 <p>Body Related Features:</p> <ul style="list-style-type: none"> • Series = V23100-V4 / Dry Reed relay DIP & SIL • Polarized = No <p>Contact Related Features:</p> <ul style="list-style-type: none"> • Mounting Options = PC Board • Enclosure = Ultrasonic Cleanable • FCC Part 68 Isolation = No • Approved Standards = cUL • Contact Base Material = Rhodium • Approx. Dimensions (L x W x H) (mm [in]) = 19.30 x 7.50 x 5.70 [.760 x .295 x .224] • Option = With Electrostatic Shield • DIP Package Style = Flat • Contact Type = Bifurcated • Pin Configuration = DIP 	<p>Configuration Related Features:</p> <ul style="list-style-type: none"> • Contact Arrangement = 1 Form A, SPST-NO, 1 N/O • Coil Magnetic System = Non Polarized, Monostable • Coil Suppression Diode = Without <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = Not reviewed for ELV/RoHS compliance • Lead Free Solder Processes = Not reviewed for lead free solder process <p>Other:</p> <ul style="list-style-type: none"> • Brand = Axicom