


NOTES:

1. MATERIALS:
 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
2. FINISH:
 BODY AND CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290
 OVER COPPER FLASH
 CAP: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
3. ELECTRICAL:
 IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-3 GHz

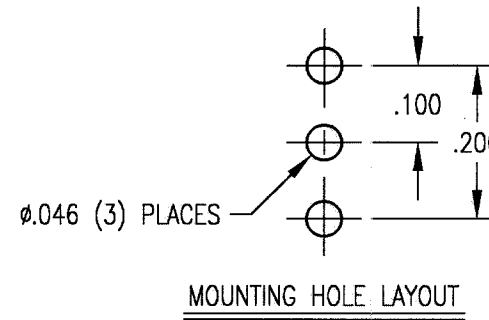

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE NOMINAL AND
FOR REFERENCE ONLY.
DIMENSIONS IN INCHES
DO NOT SCALE PRINT

SALES DRAWING



RETCONN

A SUBSIDIARY OF SPM
199 W. PEARL ROAD TORRINGTON, CT. 06790
TEL. (860) 489-1220 FAX (860) 496-7307

TITLE		31 SERIES RIGHT ANGLE PC MOUNT PLUG			
DRAWN	DATE	CHECKED	SCALE	FSCM ODWJ4	
JED	5/20/98	<i>J. Reed</i>	4:1		
APPR.	DWG. NO.	REV.			
<i>P.P.</i>	312-010-6141G	B			

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR	MATERIAL
B	NPR 854	5/20/98	JED	<i>FRP</i>	
REVISIONS					
					FINISH