



DRAWING NOT TO SCALE  
FOR REFERENCE ONLY


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

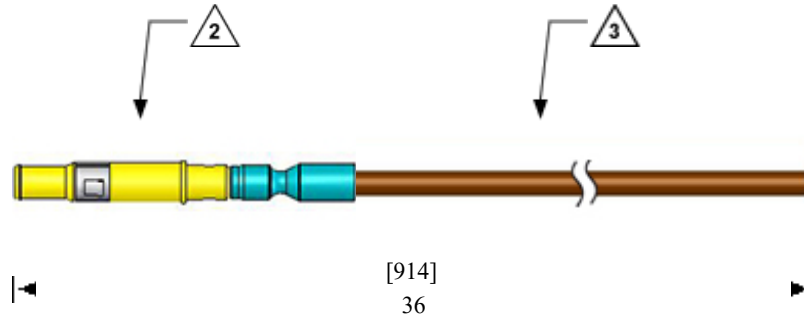

**PATCHCORD**  
designer

5. Maximum Operating Frequency = 2 GHz

 RG316 TAN M17/113 (50 OHM, 3 GHZ) UNTERMINATED

 MINI COAX, ITA, SOLDER SLEEVE, 2 GHZ

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS MANUAL @ [WWW.VPC.COM](http://WWW.VPC.COM)

NOTES:

DIMENSIONS ARE SHOWN AS  
[MILLIMETERS]  
INCHES

CUSTOMER DRAWING		
VIRGINIA PANEL CORPORATION <a href="http://WWW.VPC.COM">WWW.VPC.COM</a>		
Coax Patchcord, ITA, Mini Coax, Solder Sleeve, 36", RG316 Tan, Single Ended, (2 GHz)		
SIZE A	CAGE CODE 18117	<b>PART#</b> 7-339116000-036
SCALE: NONE	DATE: 12/21/2021	SHEET 1 OF 1