

# 219XA Series

## 5×20mm, Time-Lag Fuse



### Description

5×20mm time-Lag glass body cartridge fuse designed to IEC specification.

### Features

- Designed to International IEC Standards for use globally
- Available in cartridge and axial lead form
- Meets the IEC 60127-2, Sheet 6 specification for time-Lag fuses
- RoHS compliant and lead-free

### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

### Additional Information



Resources



Accessories



Samples

### Electrical Characteristics for Series

| % of Ampere Rating | Ampere Rating | Opening Time                |
|--------------------|---------------|-----------------------------|
| 150%               | 0.04A - 0.1A  | 1 hours, Minimum            |
|                    | 0.125A - 6.3A | 1 hours, Minimum            |
| 210%               | 0.04A - 0.1A  | 2 minutes, Maximum          |
|                    | 0.125A - 6.3A | 2 minutes, Maximum          |
| 275%               | 0.04A - 0.1A  | 0.2 sec., Min; 10 sec. Max  |
|                    | 0.125A - 6.3A | 0.6 sec., Min; 10 sec. Max  |
| 400%               | 0.04A - 0.1A  | 0.04 sec., Min; 3 sec. Max  |
|                    | 0.125A - 6.3A | .15 sec., Min; 3 sec. Max   |
| 1000%              | 0.04A - 0.1A  | .01 sec., Min; 0.3 sec. Max |
|                    | 0.125A - 6.3A | .02 sec., Min; 0.3 sec. Max |









### Agency Approvals

| Agency | Agency File/Certificate Number                           | Ampere Range    |
|--------|--|-----------------|
| PS E   | Cartridge:<br>NBK220604-E10480A<br>DPC NBK230604-E10480A | 1A - 5A<br>6.3A |
|        | Leaded:<br>NBK220604-E10480B<br>NBK230604-E10480B        | 1A - 5A<br>6.3A |
| CCC    | CCC self declaration<br>No.:2020970207000068             | 0.040A-6.3A     |
| cRU US | E10480   | 0.040A - 6.3A   |
| SP     | 29862  | 0.125A - 6.3A   |
| S      | 1620075  | 0.040A - 6.3A   |
| DVE    | 40016080   | 0.040A - 6.3A   |
| VD     | KM41462  | 0.125A - 6.3A   |
| CE     | N/A  | 0.040A - 6.3A   |
| EAC    | RU C-DE.HB26.B.01385/21                                  |                 |

# 219XA Series

## 5×20mm, Time-Lag Fuse

### Electrical Characteristic Specifications by Item


| Amp Code | Amp Rating (A) | Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting P <sub>t</sub> (A <sup>2</sup> sec) | Maximum Voltage Drop at Rated Current (mV) | Maximum Power Dissipation at 1.5I <sub>n</sub> (W) | Agency Approvals  |   |   |   |   |   |   |   |
|----------|----------------|--------------------|---------------------|--------------------------------|---|--|--|---|---|---|---|---|---|---|---|
|          |                |                    |                     |                                |   |  |  |  |  |  |  |  |  |  |  |
| .040     | 0.040          | 250                | 150A @ 250VAC       | 31.8620                        | 0.01640   | 4000                                       | 1.6  |   |   | x   |   | x   | x   | x   |   |
| .050     | 0.050          | 250                |                     | 21.2920                        | 0.01700   | 3500                                       | 1.6  |   |   | x   |   | x   | x   | x   |   |
| .063     | 0.063          | 250                |                     | 14.2685                        | 0.03800   | 3000                                       | 1.6  |   |   | x   |   | x   | x   | x   |   |
| .100     | 0.100          | 250                |                     | 6.0180                         | 0.07900   | 2500                                       | 1.6  |   |   | x   |   | x   | x   | x   |   |
| .125     | 0.125          | 250                |                     | 4.2000                         | 0.13000   | 2000                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .160     | 0.160          | 250                |                     | 2.5500                         | 0.31000   | 1900                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .200     | 0.200          | 250                |                     | 1.6000                         | 0.32000   | 1500                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .250     | 0.250          | 250                |                     | 1.0495                         | 0.54000   | 1300                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .315     | 0.315          | 250                |                     | 0.8475                         | 1.23000   | 1100                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .400     | 0.400          | 250                |                     | 0.5350                         | 1.40000   | 1000                                       | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .500     | 0.500          | 250                |                     | 0.3700                         | 3.00000   | 900  | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .630     | 0.630          | 250                |                     | 0.2750                         | 4.82000   | 300  | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| .800     | 0.800          | 250                |                     | 0.1635                         | 9.35000   | 250  | 1.6  | x   |   | x   | x   | x   | x   | x   | x   |
| 001.     | 1.00           | 250                |                     | 0.1165                         | 19.20000  | 150  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 1.25     | 1.25           | 250                |                     | 0.0817                         | 27.15000  | 150  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 01.6     | 1.60           | 250                |                     | 0.0551                         | 44.20000  | 150  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 002.     | 2.00           | 250                |                     | 0.0452                         | 92.70500  | 150  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 02.5     | 2.50           | 250                |                     | 0.0305                         | 138.00000   | 120  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 3.15     | 3.15           | 250                |                     | 0.0231                         | 202.00000   | 100  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 004.     | 4.00           | 250                |                     | 0.0158                         | 330.00000   | 100  | 1.6  | x   | x   | x   | x   | x   | x   | x   | x   |
| 005.     | 5.00           | 250                | 0.0117              | 544.00000                      | 100   | 1.6  | x  | x   | x   | x   | x   | x   | x   | x   |   |
| 06.3     | 6.3            | 250                | 0.0107              | 1093.03500                     | 100   | 1.6  | x  | x   | x   | x   | x   | x   | x   | x   |   |

\*4A-6.3A have an Interrupting rating 100A@350Vac.


# 219XA Series

## 5×20mm, Time-Lag Fuse


Temperature Re-rating Curve

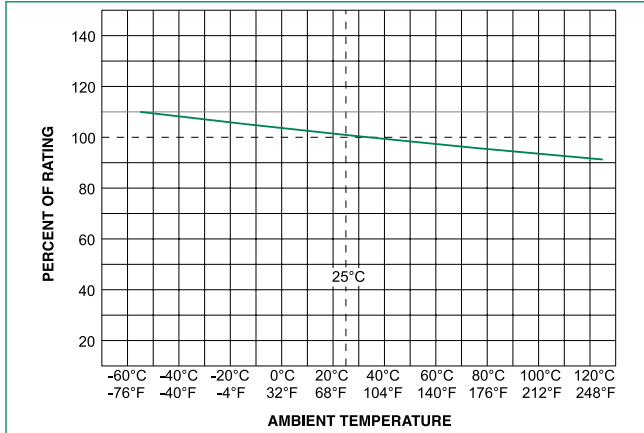

Average Time Current Curves

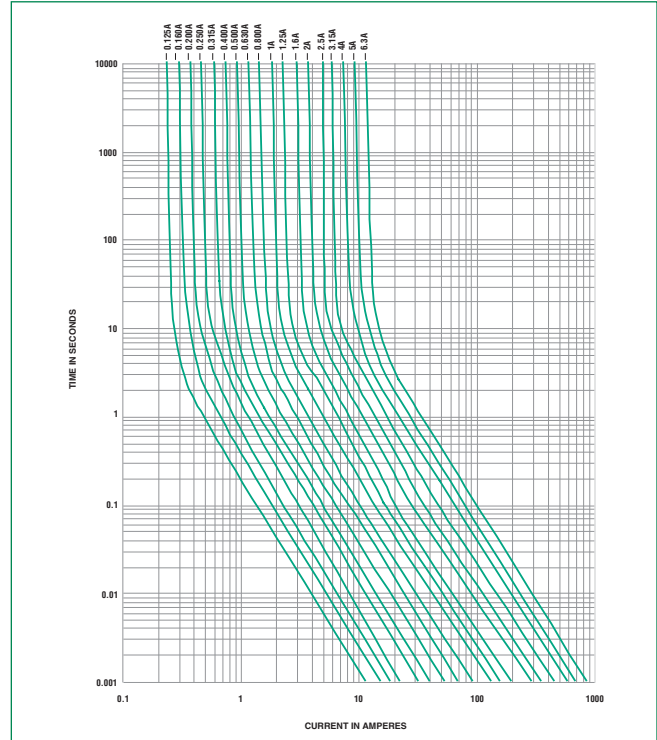

Soldering Parameters - Wave Soldering

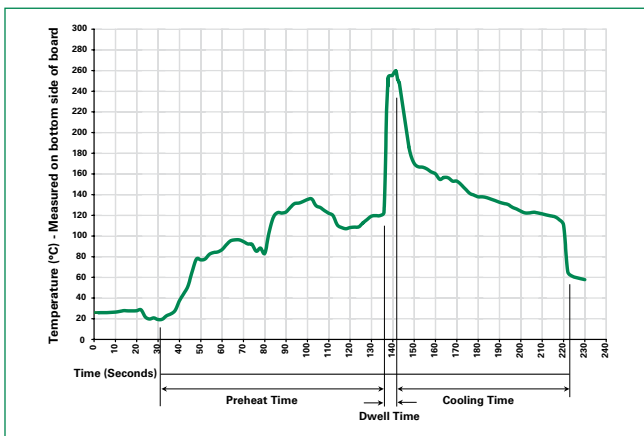

**Recommended Process Parameters:**

| Wave Parameter                                       | Lead-Free Recommendation          |
|--|-----------------------------------|
| Preheat:<br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                                 | 100°C                             |
| Temperature Maximum:                                 | 150°C                             |
| Preheat Time:  | 60-180 seconds                    |
| Solder Pot Temperature:                              | 260°C Maximum                     |
| Solder Dwell Time:                                   | 2-5 seconds                       |

**Recommended Hand-Solder Parameters:**

Solder Iron Temperature: 350°C +/- 5°C  
 Heating Time: 5 seconds max.

**Note:** These devices are not recommended for IR or Convection Reflow process.

**Packaging**

| Packaging Option    | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width     |
|---------------------|-------------------------|----------|---------------------------|------------------|
| <b>219XA Series</b> |                         |          |                           |                  |
| Bulk                | N/A                     | 1000     | MXA                       | N/A              |
| Bulk                | N/A                     | 1000     | MXAE                      | N/A              |
| Reel and Tape       | EIA 296-E               | 1000     | MRAET1                    | T1=53mm (2.087") |
| Bulk                | N/A                     | 1000     | MXG                       | N/A              |

# 219XA Series

## 5×20mm, Time-Lag Fuse


### Product Characteristics

|                          |   |
|--------------------------|---|
| <b>Materials</b>         | Body: Glass<br>Cap: Nickel Plated Brass<br>Leads: Tin Plated Copper                     |
| <b>Terminal Strength</b> | MIL-STD-202, Method 211.<br>Test Condition A  |
| <b>Solderability</b>     | MIL-STD-202 Method 208  |
| <b>Product Marking</b>   | Cap 1: Brand logo, current and voltage rating<br>Cap 2: Agency approval markings Series |
| <b>Packaging</b>         | Available in Bulk (M=1000 pcs/pkg) or on Tape/Reel (MRET1=1000 pcs/reel)                |


|                              |  |
|------------------------------|--|
| <b>Operating Temperature</b> | -55°C to +125°C  |
| <b>Shock</b>                 | MIL-STD-202, Method 107, Test Condition B: (5 cycles -65°C to +125°C)                                  |
| <b>Vibration</b>             | MIL-STD-202, Method 201  |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A high RH (95%) and elevated temperature (40°C) for 240 hours. |
| <b>Salt Spray</b>            | MIL-STD-202 Method 101, Test Condition B   |

### Dimensions

All dimensions in mm

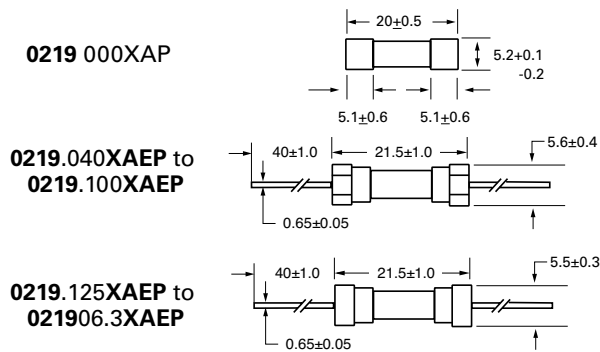

### Part Numbering System

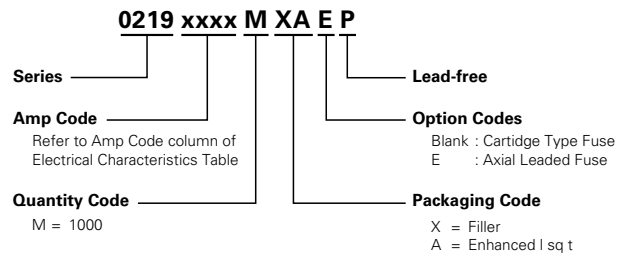

### Recommended Accessories

| Accessory Type | Series                  | Description   | Max Application Voltage | Max Application Amperage |
|----------------|-------------------------|---|-------------------------|--------------------------|
| Holder         | <a href="#">345_ISF</a> | Panel Mount Shock-Safe Fuseholder   | 250                     | 10                       |
|                | <a href="#">345</a>     | Shock-Safe Fuseholder with PC Mount, Solder Mount and Panel Mount options |                         | 20                       |
|                | <a href="#">830</a>     | PC Mount Shock-Safe Miniature Fuseholder                                  |                         | 16                       |
| Block          | <a href="#">520</a>     | Metric OMNI-BLOK® Fuse Block  |                         | 10                       |
|                | <a href="#">646</a>     | PC Mount Miniature Fuse Block   |                         | 6.3                      |
|                | <a href="#">658</a>     | Surface Mount Miniature Fuse Block  |                         | 10                       |
| Clip           | <a href="#">520_W</a>   | PC Mount Miniature Fuse Clip  |                         | 6.3                      |
|                | <a href="#">111</a>     | PC Board Mount Fuse Clip  |                         | 10                       |
|                | <a href="#">445</a>     | PC Board Mount Fuse Clip  |                         | 10                       |

- Notes:**
- Do not use in applications above rating.
  - Please refer to fuseholder data sheet for specific re-rating information.
  - Please contact factory for applications greater than the max voltage and amperage shown.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).