


STLZ950/..G-5.08-V-GREEN



Technical Data

Wire Sizes	Insulating Material
Solid min -	Material PA 6.6
solid max -	Flammability Class UL 94 V-0
Stranded (flexible) -	Temperatures
min	Operating Temperature -30 °C - 105 °C
Stranded (flexible) -	Wave Soldering Process
max	Soldering Temperature, recommended 265 °C
Stranded with Ferrule -	Peak Soldering Time, recommended 3-4 s
min	Reflow Process
Stranded with Ferrule -	Soldering Temperature, recommended -
max	Peak Soldering Time, recommended -
Dimensions	
Stripped Length	
PCB Hole Diameter 1.4 mm	
Materials	
Contact Pin Copper Alloy	


Colours

GREEN	RAL6018	
BLACK	RAL9011	
BASALT GREY	RAL7012	
PEBBLE GREY	RAL7032	
LIGHT GREY	RAL7035	
LIGHT GREEN	similar RAL 6018	

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

Counterparts (Spacing 5.08 mm)

Pin Strip/Terminal Blocks				
AKZ950	STLZ950-INV	AKZ4951	AKZ1200	AKZ1100

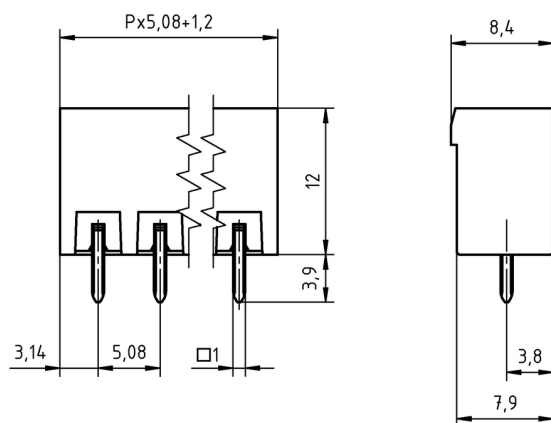

Order Data (Spacing mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	11.36	STLZ950/2G-5.08-V-GREEN	50950025121F	200
3	16.44	STLZ950/3G-5.08-V-GREEN	50950035121F	200
4	21.52	STLZ950/4G-5.08-V-GREEN	50950045121F	200
5	26.60	STLZ950/5G-5.08-V-GREEN	50950055121E	100
6	31.68	STLZ950/6G-5.08-V-GREEN	50950065121E	100
7	36.76	STLZ950/7G-5.08-V-GREEN	50950075121E	100
8	41.84	STLZ950/8G-5.08-V-GREEN	50950085121D	50
9	46.92	STLZ950/9G-5.08-V-GREEN	50950095121D	50
10	52.00	STLZ950/10G-5.08-V-GREEN	50950105121D	50
11	57.08	STLZ950/11G-5.08-V-GREEN	50950115121D	50
12	62.16	STLZ950/12G-5.08-V-GREEN	50950125121D	50
13	67.24	STLZ950/13G-5.08-V-GREEN	50950135121D	50
14	72.32	STLZ950/14G-5.08-V-GREEN	50950145121D	50
15	77.40	STLZ950/15G-5.08-V-GREEN	50950155121D	50
16	82.48	STLZ950/16G-5.08-V-GREEN	50950165121D	50
17	87.56	STLZ950/17G-5.08-V-GREEN	50950175121D	50
18	92.64	STLZ950/18G-5.08-V-GREEN	50950185121D	50
19	97.72	STLZ950/19G-5.08-V-GREEN	50950195121D	50
20	102.80	STLZ950/20G-5.08-V-GREEN	50950205121D	50
21	107.88	STLZ950/21G-5.08-V-GREEN	50950215121D	50
22	112.96	STLZ950/22G-5.08-V-GREEN	50950225121D	50
23	118.04	STLZ950/23G-5.08-V-GREEN	50950235121D	50
24	123.12	STLZ950/24G-5.08-V-GREEN	50950245121D	50

Accessories

Figure	Designation	Article Number
	Coding star CS2-5.0/5.08-RED	50000000024
	Dividing element SE-STL950-GREEN	50950000002



Ratings



Usegroup	B	C	D	
Rated Voltage	300 V	150 V	300 V	250 V
Rated Current	15 A	15 A	10 A	12 A
Overtoltage Category				III
Test Voltage	1.6 kV	1.6 kV	1.6 kV	4.0 kV
Pollution Degree				3