
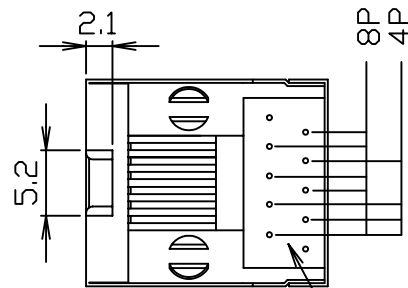



SHIELDED

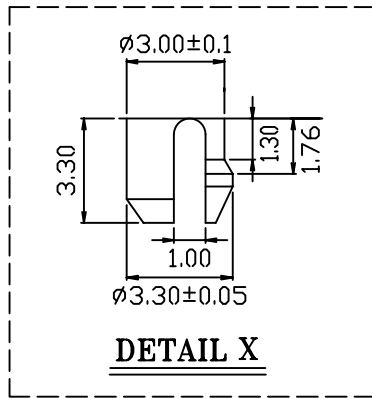

INSERT

MATERIALS:

- HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER,
STANDARD COLOR-BLACK
 - CONTACTS-0.45mm DIA. ROUND CONTACTS
PHOS-BRONZE PLATED WITH HARD GOLD.
 - SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

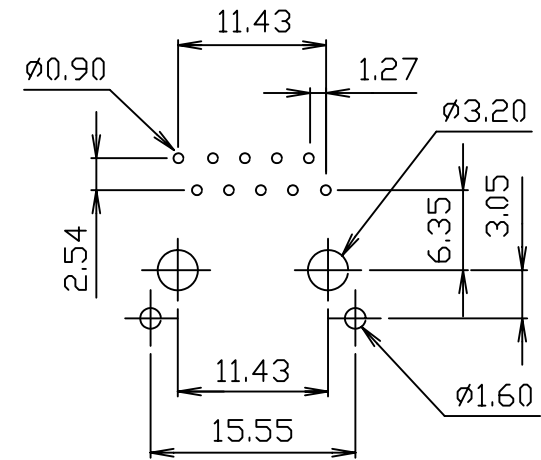

PC Board Layout



煜倫有限公司

PART NO. MJF12-KX06A3-0808

DWG NO. MJF12-KX06A3-0808

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
AWG

DESCRIPTION:

10 & 8POSITION SIDE ENTRY
VERY LOW PROFILE, SHIELDED PCB JACK

AREA

REVISIONS

HK

DATE