
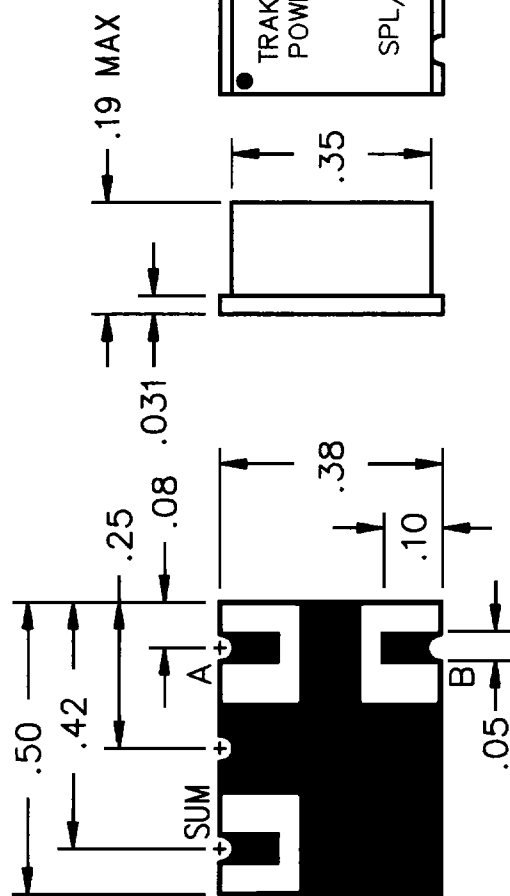


POWER SPLITTER

SPECIFICATIONS:

FREQUENCY : 4-2000 MHz
 LOSS : 0.75 dB TYP, 2.0 dB MAX
 VSWR : 1.3:1 TYP, 1.5:1 MAX
 AMP BALANCE : ± 0.1 dB TYP, ± 0.3 dB MAX
 PHASE BALANCE : $\pm 1^\circ$ TYP, $\pm 3^\circ$ MAX
 ISOLATION : 22 dB TYP, 14 dB MIN
 POWER : 1 WATT NOMINAL
 IMPEDANCE : 75 OHMS NOMINAL

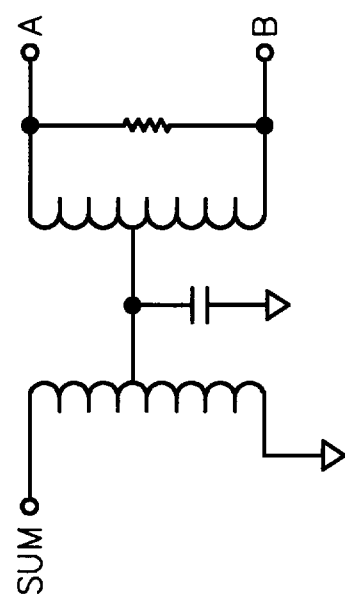

SCHEMATIC DIAGRAM

MATERIAL	
☒ STANDARD	• BASE : FR-4
☐ SPECIAL	• COVER : VECTRA
	• MARKING : LASER
	• FINISH : SOLDER TIN

TRAK MICROWAVE
 4726 Eisenhower Boulevard
 Tampa, Florida 33634
 (813)884-1411, FAX (813)886-2794

MODEL NO. SPL/2BF-01/75 SHT OF 1 DATE 5/94