

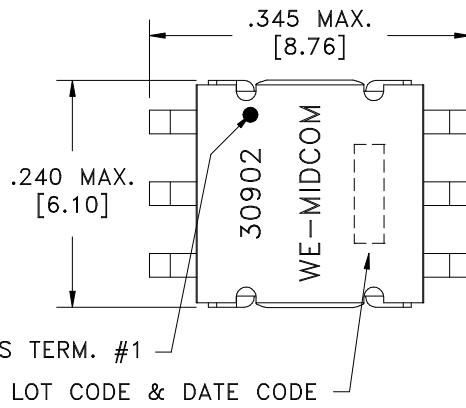



TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE



AREA REPRESENTS TERMINAL PAD DIMENSIONS

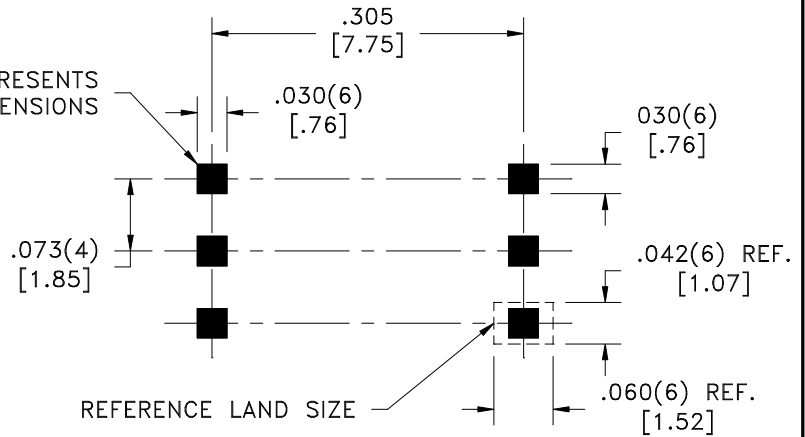

6E

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C):  
 3-2, 1.22 ohms max.  
 2-1, 1.40 ohms max.  
 4-6, 24.0 ohms max.
- 6B DIELECTRIC RATING: 1500VDC for 1 second between 3-4.
- INDUCTANCE: 2mH min., 10kHz, 100mVAC, 3-1, Ls, @20°C.
- LEAKAGE INDUCTANCE: 1.2uH max., 100kHz, 100mVAC, 3-1(tie 4+6), Ls.
- 6C TURNS RATIO: (4-6):(3-1) = 3:1, ±1%.

OPERATING TEMPERATURE RANGE: -40° to +85°C.

DETAILS SUBJECT TO CHANGE

<b>Midcom, Inc.</b> Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [.13]				DWG.# 30902R
	DRAWING TITLE <b>TRANSFORMER</b>		DRAWING NO. <b>30902R</b>		
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		REVISIONS: SEE SHEET 1		SCALE ---	SHEET 2 OF 5

6C 12/08