REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

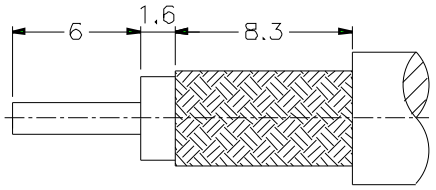

RECOMMENDED
CABLE STRIPPING DIM'S

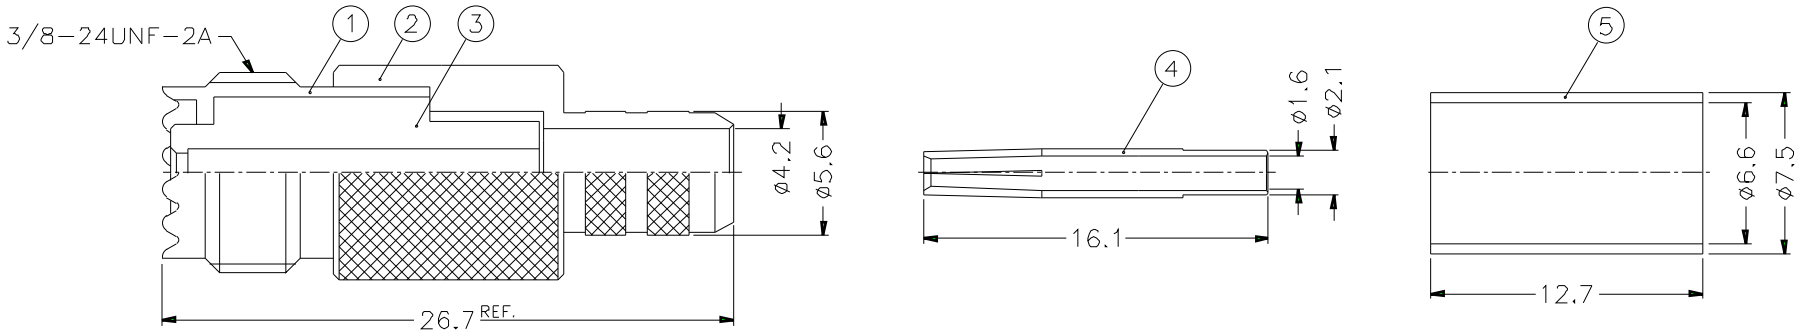

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2 PHOSPHOR BRONZE PER QQ-B-750
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4 GOLD PL 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. JIS H 3250, C 2700

1. CRIMPED FERRULE HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	FERRULE	NOTE 6	NOTE 3	1	FR-75/66X127
4	CONTACT PIN	NOTE 2	NOTE 4	1	MU7005-4-21/16
3	INSULATOR	NOTE 5	NATURAL	1	MU6121A1-3T-50
2	BARREL	NOTE 1	NOTE 3	1	MU6121A1-2-56/42
1	BODY	NOTE 1	NOTE 3	1	RSA-3450-2

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 3/1 ISSUE A

PART NO. MU6121A1-NT3G-7B-50

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

Amphenol

TITLE
MINI-UHF CRIMP JACK

DRAWING NO.
KJ-MU6121A1-NT3G-8X-50

ITEM NO.