

High efficiency, single-digit numeric displays


LA-6000 Series

The LA-6000 series are LED numeric displays designed to be used in bright locations. Red, orange, yellow and green are available, and they are suitable for use in a wide range of applications.

●Features

- 1) Height of character : 14.22 mm.
- 2) Common anode and common cathode configurations are available for each color.
- 3) Each segment has independent pin connections and static drive is possible.
- 4) High efficiency reflectors are used to achieve a bright, clear display.
- 5) The package surface is coated gray and the segments are milky white.


●External dimensions (Unit: mm)

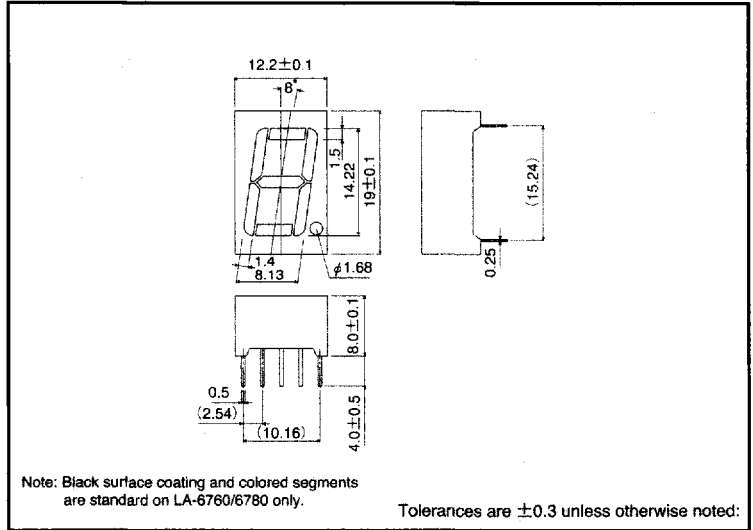

●Selection guide

Emitting color	Red	Orange	Yellow	Green
Common				
Anode	LA-6760	LA-6660	LA-6860	LA-6460
Cathode	LA-6780	LA-6680	LA-6880	LA-6480


●Pin layout



Pin No.	Function
1	Segment "e"
2	Segment "d"
3	Common
4	Segment "c"
5	D.P
6	Segment "b"
7	Segment "a"
8	Common
9	Segment "f"
10	Segment "g"

LED Numeric Displays

● Internal circuit schematic (example of common anode)



● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Orange	Yellow	Green	Unit
		LA-6760/6780	LA-6660/6680	LA-6860/6880	LA-6460/6480	
Power dissipation	P _D	480	480	480	480	mW
Power dissipation	P _D /seg	60	60	60	60	mW
Forward current	I _F	20	20	20	20	mA
Peak forward current	I _{FP}	60*	60*	60*	60*	mA
Reverse voltage	V _R	5	5	5	5	V
Operating temperature	T _{opr}	-25~85				°C
Storage temperature	T _{stg}	-30~100				°C

* Pulse width 1ms Duty 1/5

● Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Orange			Yellow			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F =10mA	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	—	2.1	2.8	V
Reverse current	I _R	V _R =5V	—	—	100	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ _P	I _F =10mA	—	650	—	—	610	—	—	585	—	—	563	—	nm
Spectral line half width	Δλ	I _F =10mA	—	40	—	—	40	—	—	40	—	—	40	—	nm

* Not designed for radiation resistance.

● Luminous intensity

Color	λ _p	Type	Min.	Typ.	Max.	Unit
Red	650	LA-6760	3.6	10	—	mcd
		LA-6780				
Orange	610	LA-6660	3.6	10	—	mcd
		LA-6680				
Yellow	585	LA-6860	3.6	10	—	mcd
		LA-6880				
Green	563	LA-6460	9	25	—	mcd
		LA-6480				

Note: Measured at I_F = 10 mA