




Our commitment. Your advantage.

- [Products](#) | [Documentation](#) | [Resources](#) | [My Account](#) | [Customer Support](#)

[Home](#) > [Products](#) > [By Type](#) > [PolySwitch Resettable Devices](#) > [Product Feature Selector](#) > Product Details

RTE190 Product Details

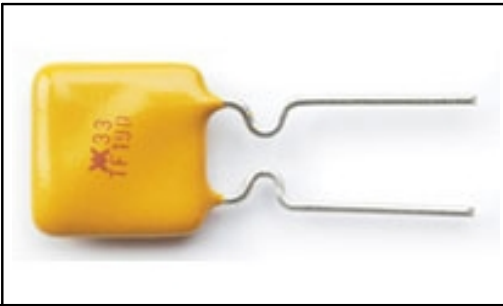

RTE190

TE Internal Number: 605133-000



[Contact Product Information Center](#)

PolySwitch Resettable Devices

[Always ELV Compliant](#) ([Find RoHS Compliant Alternates/Statement of Compliance](#))

Product Highlights:

- Radial Application
- Family Name = RTE
- Radial Construction, Through Hole Construction
- IH (Room Temperature) = 1.9 Amps.
- IT (Room Temperature) = 3.00 Amps.

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

- [Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

| | |
|--|--|
| <p>Product Drawings:</p> <ul style="list-style-type: none"> • RTE190 (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available | <p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling |
|--|--|

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

| | |
|--|---|
| <p>Product Type Features:</p> <ul style="list-style-type: none"> • UL Recognized = File No. E74889 • CSA File No. = 78165C <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • IH (Room Temperature) (Amps.) = 1.9 • IT (Room Temperature) (Amps.) = 3.00 • Vmax Operating (V) = 33 • Rmin (?) = 0.045 • Rmax (?) = 0.063 • R1 Max [Post Trip] (?) = 0.092 • Power Dissipation (Typical) (W) = 3.50 <p>Termination Related Features:</p> <ul style="list-style-type: none"> • Construction = Radial, Through Hole <p>Body Related Features:</p> <ul style="list-style-type: none"> • Lead Type = Standard Kinked Lead <p>Contact Related Features:</p> <ul style="list-style-type: none"> • Family Name = RTE | <p>Configuration Related Features:</p> <ul style="list-style-type: none"> • Coating = Coated <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = ELV compliant • Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C • RoHS/ELV Compliance History = Always was ELV compliant • TUV Certificate No. = R2279286 <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Operating Temperature (Max.) (°C) = 85 <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = Radial <p>Packaging Related Features:</p> <ul style="list-style-type: none"> • Packaging Method = Bulk <p>Other:</p> <ul style="list-style-type: none"> • Brand = Raychem |
|--|---|

[Provide Website Feedback](#) | [Need Help?](#)