



Legerity ADSL Inductors


EE5-SMD

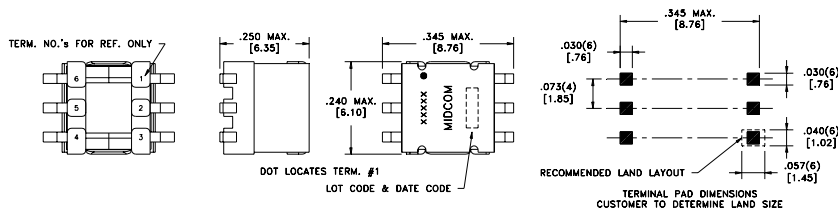


EPX9-SMD

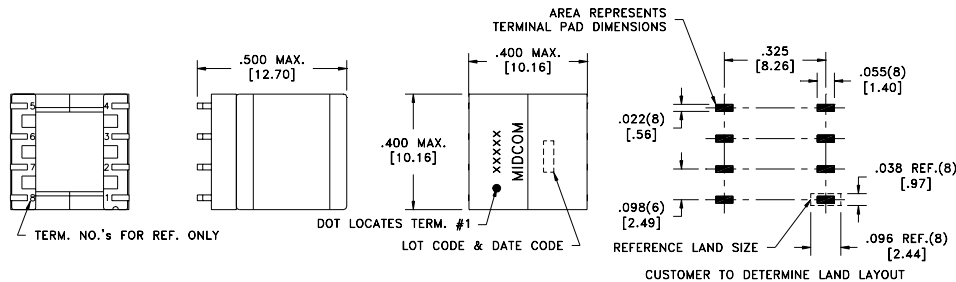

Part Number	L per wind @20°C (μH)	Inductance Tolerance %	DCR per wind ±10% tolerance	Mechanical	Schematic
40239R	497	10	5.70	EE5-SMD	1
40236R	261	10	2.80	EE5-SMD	1
40238R	169	7	2.80	EE5-SMD	1
40237R	154	7	2.67	EE5-SMD	1
40240R	96	7	1.63	EE5-SMD	1
40242R	92	7	1.60	EE5-SMD	1
40241R	81	7	1.50	EE5-SMD	1
40234R	55	7	1.20	EE5-SMD	1
40235R	47	7	1.10	EE5-SMD	1
40838R	8000	10	15.00	EPX9-SMD	2
40839R	4000	10	15.00	EPX9-SMD	2



1



2

Details subject to change. Contact your Midcom sales representative for additional information. Dimensions: in/mm. All tolerances are ±.010/.025 and electrical specifications are @25°C unless otherwise specified.