

SR16N-ZA-IS

- 2 Connections



Phoenix Mecano Brand

Technical Data








Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	25.0 mm ²	Flammability Class	UL 94 V-2
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	25.0 mm ²	Working Temperature	-40 - 105 °C
Stranded (flexible) min	0.2mm ²	Dimensions	
Stranded (flexible) max	16.0 mm ²	Stripped Length	15.0 mm
Stranded with Ferrule min	0.2 mm ²	Width	12.0 mm
Stranded with Ferrule max	16.0 mm ²	Length	54.0 mm
		Height TS35 x 7.5	47.0 mm
Clamping Range min	0.2mm ²		
Clamping Range max	25.0 mm ²		

Electrical Data


General

Cross Connection Channels	1
---------------------------	---

Colours

	BEIGE, similar RAL 1019		RED, similar RAL 3001
	BLUE, similar RAL 5015		BLACK, similar RAL 9011
	GREY, similar RAL 7004		
	WHITE, similar RAL 9010		
	YELLOW, similar RAL 1023		

Connection Diagram

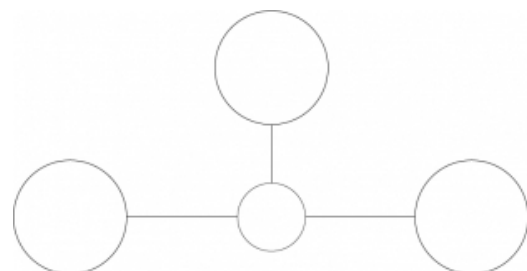

Order Data

Article Designation	Article Number	PU
SR16N-ZA-IS-BEIGE	41532.2	50
SR16N-ZA-IS-BLUE	41532.5	50

Accessoires

Article Designation	Article Number	PU
Cross-Connection uninsulated Q2	492257.0	20
Cross-Connection uninsulated Q3	492258.0	20
Cross-Connection uninsulated Q4	492265.0	10
Cross-Connection uninsulated Q10	492266.0	10
End Stopn ES35/K/ST	492828.0	50
Quick Labelling PSB8/40	499323.7	400

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	600 V	600 V	800 V
Rated Current	85 A	65 A	76 A
Rated Wire Size	AWG 10-6	AWG 10-6	16.0 mm ²
Rated Impulse Voltage			8 V
Pollution Degree			3